



MOTOROLA

intelligence everywhere™




MOTOMANUAL

Bluetooth® Transceiver

Welcome

Welcome to the world of Motorola digital wireless communications! We are pleased that you have chosen the Motorola DC800 Bluetooth[®] Transceiver.



1 Pairing Button. 2 Power Button.

Transceiver Indicators

Stereo Transceiver Status	LED Indicator
Power Off	Off
Pairing Mode	On (Steady)
Pairing Successful	10 rapid flashes
Standby (No Music Playing)	Flashes every 3-seconds (0.1 seconds ON, 2.9 seconds OFF)
Standby (Music Playing)	Flashes every 8-seconds (2.0 seconds ON, 6.0 seconds OFF)

Motorola, Inc.
Consumer Advocacy Office
1307 East Algonquin Road
Schaumburg, IL 60196
www.hellomoto.com

1-800-331-6456 (United States)

1-888-390-6456 (TTY/TDD United States for
hearing impaired)

1-800-461-4575 (Canada)

The use of wireless devices and their accessories may be prohibited or restricted in certain areas. Always obey the laws and regulations on the use of these products.

MOTOROLA and the Stylized M Logo are registered in the US Patent & Trademark Office. The Bluetooth trademarks are owned by their proprietor and used by Motorola, Inc. under license. All other product or service names are the property of their respective owners.

© Motorola, Inc., 2005.

6809489A95-O

Contents

Introduction	12
Transceiver Controls	14
Using Your Transceiver	17
Connecting To Your Home Audio System	18
Pairing Your Transceiver with a Bluetooth Headset	23
Transceiver Features	29
Transceiver Indicators	31
Export Law Assurances	34

Safety Information

IMPORTANT INFORMATION ON SAFE AND EFFICIENT OPERATION. READ THIS INFORMATION BEFORE USING YOUR DEVICE.

Users are not permitted to make changes or modify the device in any way. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. See 47 CFR Sec. 15.21.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation. See 47 CFR Sec. 15.19(3).

Electromagnetic Interference/Compatibility

Note: Nearly every electronic device is susceptible to electromagnetic interference (EMI) if inadequately shielded, designed, or otherwise configured for electromagnetic compatibility.

Facilities

To avoid electromagnetic interference and/or compatibility conflicts, turn off your device in any facility where posted notices instruct you to do so. Hospitals or health care facilities may be using

equipment that is sensitive to external radio frequency (RF) energy.

Aircraft

When instructed to do so, turn off your device when on board an aircraft. Any use of a device must be in accordance with applicable regulations per airline crew instructions.

Medical Devices

Hearing Aids

Some devices may interfere with some hearing aids. In the event of such interference, you may want to consult with your hearing aid manufacturer to discuss alternatives.

Other Medical Devices

If you use any other personal medical device, consult the manufacturer of your device to determine if it is adequately

shielded from RF energy. Your physician may be able to assist you in obtaining this information.

Industry Canada Notice to Users

Operation is subject to the following two conditions: (1) This device may not cause interference and (2) This device must accept any interference, including interference that may cause undesired operation of the device. See Ref IC: RSS 210 Sec. 5.11. The term "IC:" before the certification/registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment. See

Ref IC Self-Marking 6(f) and RSP-100
Sec. 4.

FCC Notice to Users

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television

reception, which can be determined by turning the equipment off and on, you are encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


Introduction

Your stereo Bluetooth[®] transceiver connects to your home audio system turning it into a wireless music system!

- Listen to music from your phone's built-in MP3 player over your home audio system speakers
- Play CDs on your home audio system and send the music wirelessly to your Motorola Bluetooth Stereo Headset
- Use high power Bluetooth (Class 1) which allows you to roam around your house and even as far as 300 feet (10 meters) while listening to music

- Play MP3's from your home computer or laptop and listen to them over your home audio speakers using the Motorola USB Adapter. Your computer and stereo can be up to 300 feet (100 meters) apart.
- Use your transceiver with any Bluetooth audio device, even products from other manufacturers


Transceiver Controls



1 Pairing Button. 2 Power Button.


1 Pairing Button — Connects transceiver to other Bluetooth devices, such as the HT820 headset.

2 Power Button — Turns transceiver on or off.



3 Housing Feet.

3 Housing Feet — Built-in recessed feet rotate 90 degrees allowing the transceiver to stand vertically. Feet fold flush for compact storage.



4 a & b Audio Out Left / Audio Out Right — Music output from your transceiver to play on your home audio system.

5 a & b Audio In Left / Audio In Right — Music input to your transceiver to play on the remote device.

6 Power Jack — Plug in power supply.

Using Your Transceiver

Your transceiver can connect to any device that contains audio input and output jacks. The following steps describe how to connect to your home audio system. The steps are the same to connect the transceiver to any other device with audio input and output jacks.


Connecting To Your Home Audio System

The transceiver transmits stereo music to a Bluetooth® enabled device such as the HT820 Stereo Bluetooth Headset. It also also receive stereo music from a Bluetooth enabled device such as a mobile phone, MP3 player, or PC.

To connect your transceiver:


Step

- 1 Use the included RCA cables to connect the **Audio Out Left** and **Audio Out Right** jacks on the transceiver to unused Audio In Left and Audio In Right jacks on your home audio system.

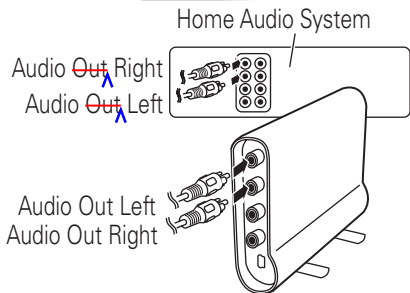


Step

- 2 Using the remaining RCA cables, connect the **Audio In Left** and **Audio In Right** jacks on the transceiver to an unused Audio Out Left and Audio Out Right jacks (sometimes labeled Tape Out or CD-R Out) on your home audio system.

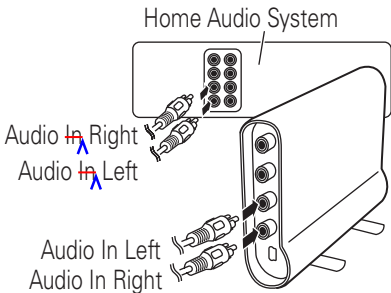

Step


- 3 Plug the included AC power supply into the **Power Jack**.

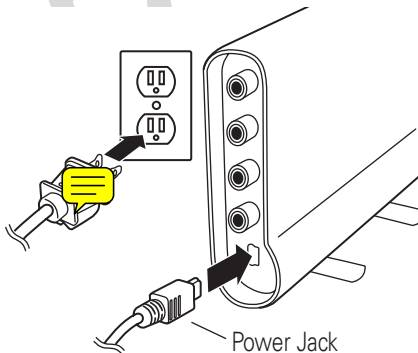

- 4 Plug the other end of the power supply into a wall outlet.
-
-

Step

- 5 Turn the transceiver on by pressing the **Power Button**.



Power Button.

Pairing Your Transceiver with a Bluetooth Headset

Note: You must pair your transceiver with another device in order to transmit music to the other device.


“Pairing” links devices equipped with *Bluetooth* wireless technology and allows the devices to remember the other device’s unique ID. After your devices are paired, they automatically connect when they are in range and turned on.

To pair your transceiver with a Bluetooth headset, place them close to each other and:

Step

- 1 Put your headset into pairing mode (refer to your headset's user's guide).

- 2 With the headset in pairing mode, press and hold the **Pairing Button** on the transceiver for about 5 seconds until the Pairing Button remains solidly lit.



Pairing Button.

Step

- 3 When the transceiver finds the headset the **Pairing Button** flashes rapidly indicating that pairing is successful.

You can now transmit stereo music from the transceiver to your stereo headset.

- 4 On your home stereo, select the output the transceiver is connected to and listen on your stereo Bluetooth headset.


Note: You need to perform pairing one time with each new device. After your devices are paired, they automatically connect when they are in range and turned on.

Pairing your Transceiver with a Bluetooth Phone or Music Player

To pair your transceiver with a stereo enabled Bluetooth phone or music player, place them close to each other and:

Step

- 1 Turn on the transceiver by pressing the **Power Button**.



Power Button.

Step

- ~~2 Put your phone or music player into Pairing Mode (refer to the device's user's guide).~~

~~When the pairing scan completes, the phone or music player displays the devices found to pair with.~~

- 3 Select **Motorola DC800** from the device list and continue responding to the screen prompts.
-

- 4 When prompted, enter the passkey, 0000, and confirm the pairing of the transceiver with the phone or music player.

Pairing is successful when the Pairing Button on the transceiver flashes rapidly.

The device ID is now stored in the phone's memory.

Pairing to Additional Devices

Your transceiver can store pairing information for up to eight different Bluetooth wireless devices. Device IDs are stored in the “Paired Device List” in memory in the order entered. If you try to pair more than eight devices, the oldest paired device is removed from the list.

When any of the eight paired devices is turned on and close to the transceiver, it automatically pairs with the transceiver.

When your transceiver is turned on, it pairs with the **last** device it was **connected to**. To connect your transceiver to another device in the paired device list, start the connection from that device. The last device to start

a connection with the transceiver becomes the “last connected” device.

Transceiver Features

To use transceiver features:

Device Status		
Bluetooth Device	Transceiver	Action
Enter Pairing (Configuration) Mode:		
On	Off	Hold Pairing Button 5 seconds until LED remains solidly lit. Transceiver searches for Bluetooth devices.

Device Status

**Bluetooth
Device**

Transceiver

Action

Turn On the Transceiver:

On in idle	On	Press the Power Button. The transceiver attempts to connect to the last device it was connected to.
------------	----	---

Turn Off the Transceiver:

On	On	Press the Power Button.
----	----	-------------------------

Stop Audio Transmission:

On	On— Audio Transmitting	Short press Pairing Button.
----	------------------------------	-----------------------------

Device Status

Bluetooth Device	Transceiver	Action
Re-enable Audio Transmission:		
On	On	Short press Pairing Button. LED blinks rapidly.

Transceiver Indicators

Stereo Transceiver Status	LED Indicator
Power Off	Off
Pairing Mode	On (Steady)
Pairing Successful	10 rapid flashes

Stereo Transceiver Status		LED Indicator
Standby (No Music Playing)	Flashes every 3-seconds (0.1 seconds ON, 2.9 seconds OFF)	
Standby (Music Playing)	Flashes every 8-seconds (2.0 seconds ON, 6.0 seconds OFF)	

Export Law Assurances

This product is controlled under the export regulations of the United States of America and Canada. The Governments of the United States of America and Canada may restrict the exportation or re-exportation of this product to certain destinations. For further information contact the U.S. Department of Commerce or the Canadian Department of Foreign Affairs and International Trade.

Motorola Limited 1 Year Warranty for Accessories

Coverage: Motorola, Inc. warrants this accessory ("Accessory") against defects in materials and workmanship under normal consumer use for 1 year from the date of purchase. Motorola, at its option, will at no charge repair, replace or refund the purchase price of this Accessory should it not conform to this warranty. This limited warranty is a consumer's exclusive remedy, extends only to the first consumer purchaser, is not transferable and is valid only on Accessories purchased by consumers in the United States or Canada.

Exclusions:

Normal Wear and Tear: Periodic maintenance, repair and replacement of parts due to normal wear and tear are excluded from coverage.

Batteries: Only batteries whose fully charged capacity falls below 80% of their rated capacity and batteries that leak are covered by this limited warranty.

Miscellaneous: This warranty does NOT cover defects or damage that result from: (a) improper operation, storage, misuse or abuse, accident or neglect, such as physical damage (cracks, scratches, etc.) to the surface of the Accessory resulting from misuse; (b) contact with liquid, water, rain, extreme humidity or heavy perspiration, sand, dirt or the like, extreme heat, or food; (c) use of the Accessory for commercial purposes or subjecting the Accessory to abnormal usage or conditions; (d) service, installation, alteration, or modification in any way by someone other than Motorola, or its authorized service centers and, (e) other acts which are not the fault of Motorola.

Obtaining Service: To obtain service or information, please call 800-331-6456 in the USA or 800-461-4575 in Canada. You will receive instructions on how to ship the Accessory, at your expense,

to a Motorola Service Center. To obtain service, you must include a copy of your receipt or other comparable dated proof of purchase, a written description of the problem and your address and telephone number.

What Other Limitations Are There? ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL BE LIMITED TO THE DURATION OF THIS LIMITED WARRANTY, OTHERWISE THE REPAIR, REPLACEMENT, OR REFUND AS PROVIDED UNDER THIS EXPRESS LIMITED WARRANTY IS THE EXCLUSIVE REMEDY OF THE CONSUMER, AND IS PROVIDED IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. IN NO EVENT SHALL MOTOROLA BE LIABLE, WHETHER IN CONTRACT OR TORT (INCLUDING NEGLIGENCE) FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF THE ACCESSORY, OR FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, SOFTWARE OR APPLICATIONS OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE ABILITY OR INABILITY TO USE THE ACCESSORY OR ANY PRODUCT USED WITH THE ACCESSORY TO THE FULL EXTENT THESE DAMAGES MAY BE DISCLAIMED BY LAW. **Some states and jurisdictions do not allow the limitation or exclusion of incidental or consequential damages, or limitation on the length of an implied warranty, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state or from one jurisdiction to another.**

motorola.com