
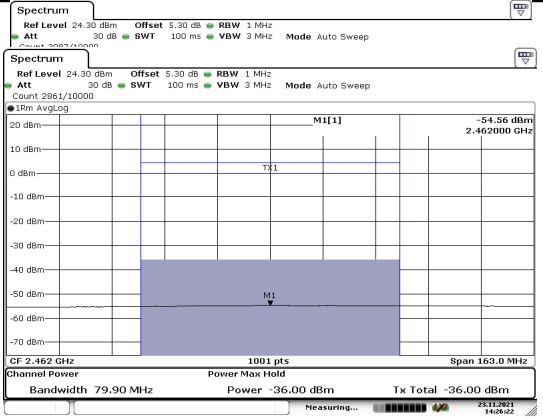
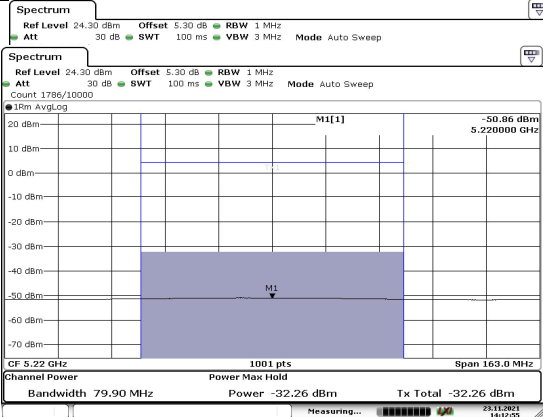
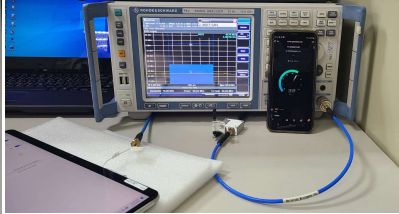


Test condtion	Hotspot Mode	RF output power @ Chain A port	Test Resut
<p>Celluar fucntion is on WiFi "2.4GHz band" is on Bluetooth function is on</p>	<p>Active</p>	 <p>Spectrum Ref Level 24.30 dBm Offset 5.30 dB RBW 1 MHz Att 30 dB SWT 100 ms VBW 3 MHz Mode Auto Sweep</p> <p>Spectrum Ref Level 24.30 dBm Offset 5.30 dB RBW 1 MHz Att 30 dB SWT 100 ms VBW 3 MHz Mode Auto Sweep Count 2861/10000</p> <p>IFm AvgLog M1[1] -54.56 dBm 2.462000 GHz</p> <p>CF 2.462 GHz 1001 pts Span 163.0 MHz</p> <p>Channel Power Power Max Hold Bandwidth 79.90 MHz Power -36.00 dBm Tx Total -36.00 dBm</p> <p>3DH5 Date: 23.NOV.2021 14:26:22</p>	<p>Pass</p>
<p>Celluar fucntion is on WiFi "5GHz band" is on Bluetooth function is on</p>	<p>Active</p>	 <p>Spectrum Ref Level 24.30 dBm Offset 5.30 dB RBW 1 MHz Att 30 dB SWT 100 ms VBW 3 MHz Mode Auto Sweep</p> <p>Spectrum Ref Level 24.30 dBm Offset 5.30 dB RBW 1 MHz Att 30 dB SWT 100 ms VBW 3 MHz Mode Auto Sweep Count 1786/10000</p> <p>IFm AvgLog M1[1] -50.86 dBm 5.220000 GHz</p> <p>CF 5.22 GHz 1001 pts Span 163.0 MHz</p> <p>Channel Power Power Max Hold Bandwidth 79.90 MHz Power -32.26 dBm Tx Total -32.26 dBm</p> <p>3DH5 Date: 23.NOV.2021 14:12:52</p>	<p>Pass</p>

2.4GHz Chain A validation in tablet mode

Test steps:

1. Insert carrier SIM card, and then turn on hotspot mode.
2. Set band of Hot spot mode at **2.4GHz**
3. Turn on flight mode of cell phone and then turn on WiFi to connect the DUT.
4. Turn on BT function
5. Let cell phone run download testing on website and DUT will only transmit RF output power continuously from WiFi transmitter.(<https://www.speedtest.net/>)
6. Check the RF output power of chain A on spectrum.

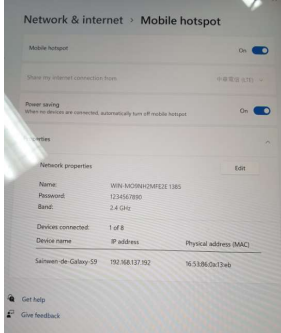

5GHz Chain A validation in tablet mode

Test steps:

1. Insert carrier SIM card, and then turn on hotspot mode.
2. Set band of Hot spot mode at **5GHz**
3. Turn on flight mode of cell phone and then turn on WiFi to connect the DUT.
4. Turn on BT function
5. Let cell phone run download testing on website and DUT will only transmit RF output power continuously from WiFi transmitter.(<https://www.speedtest.net/>)
6. Check the RF output power of chain A on spectrum.

