



Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-11-05	Test Mode	Mode 10

Port A


Channel 606.000MHz

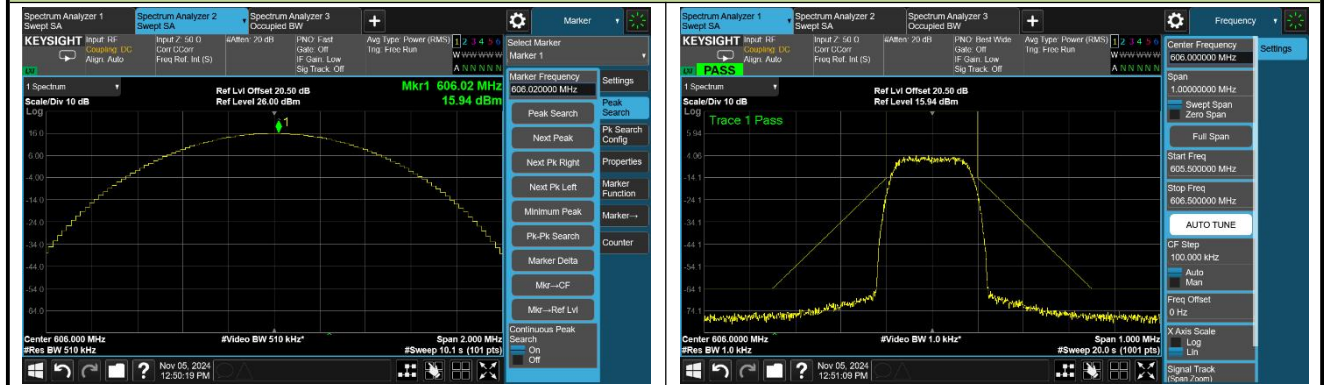

Channel 607.875 MHz

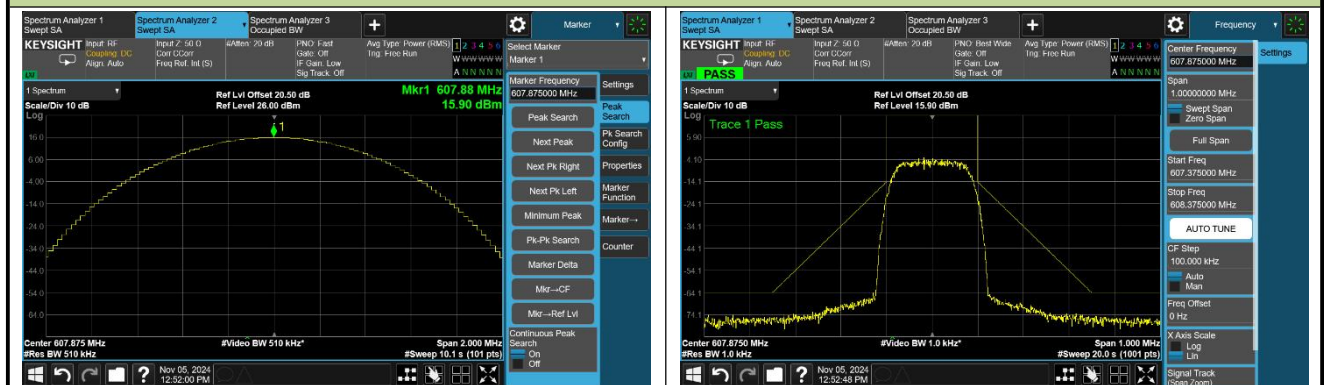


Channel 614.125 MHz

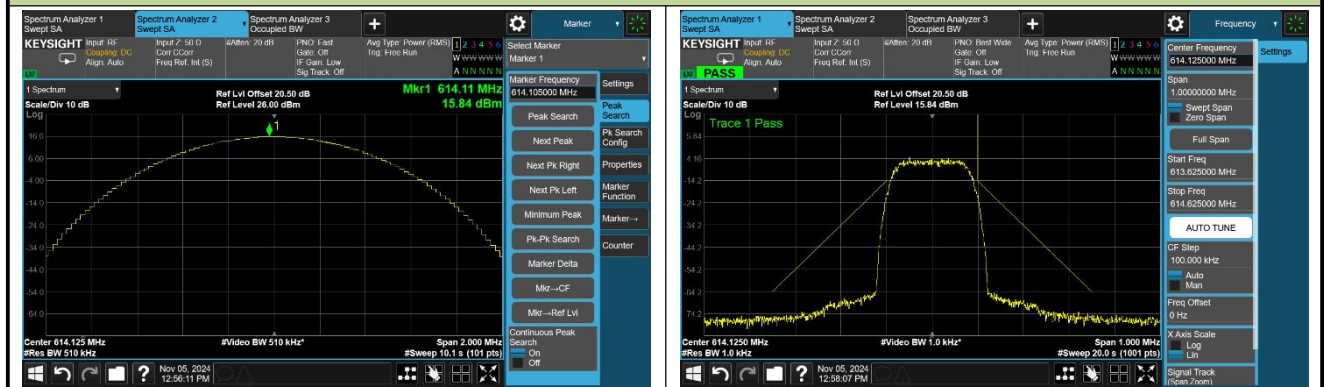


Port A


Channel 615.875MHz

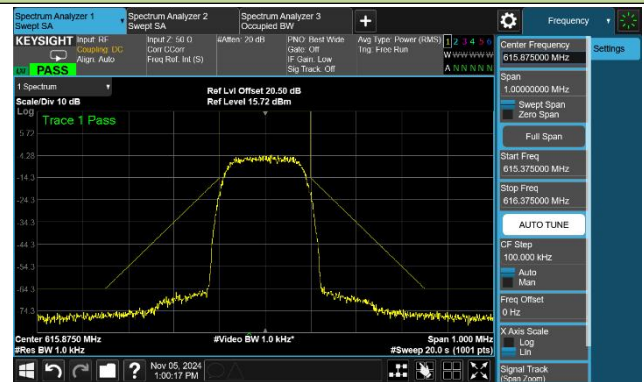

Channel 657.000MHz

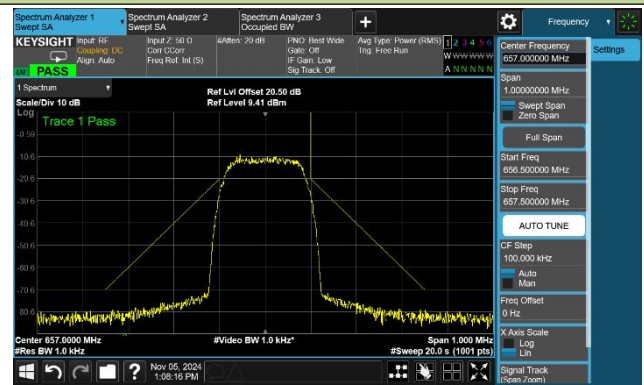


Channel 662.875MHz

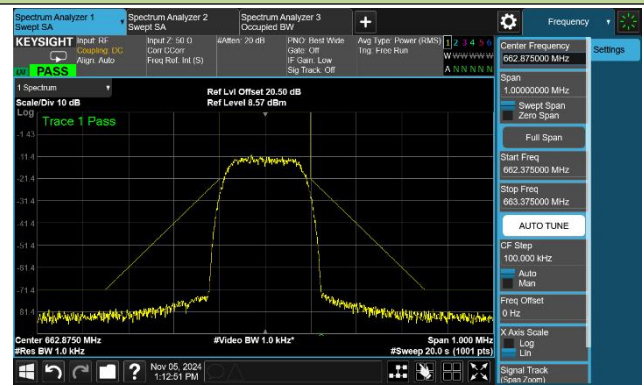


Port B


Channel 606.000MHz

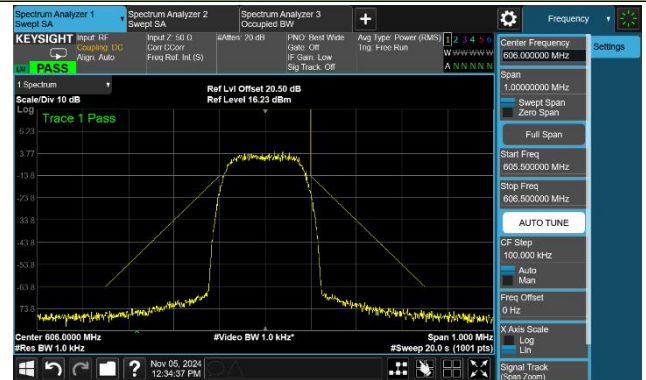

Channel 607.875 MHz

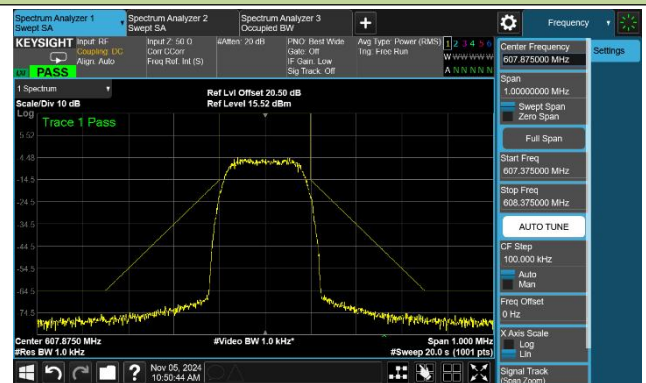


Channel 614.125 MHz

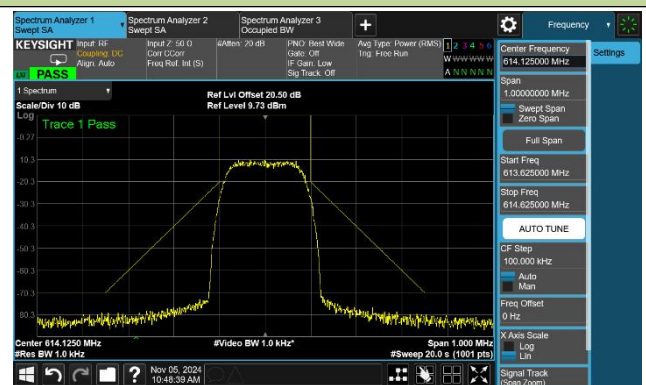


Port B


Channel 615.875MHz

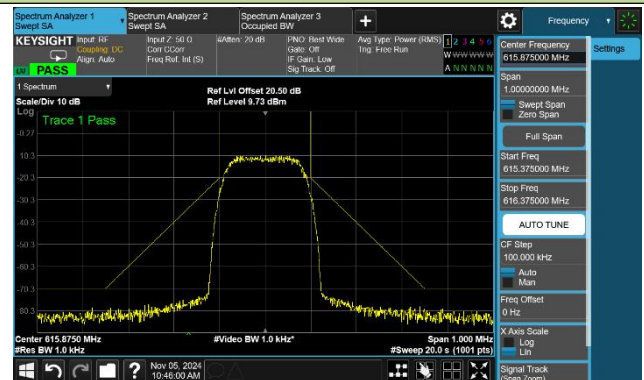

Channel 657.000MHz

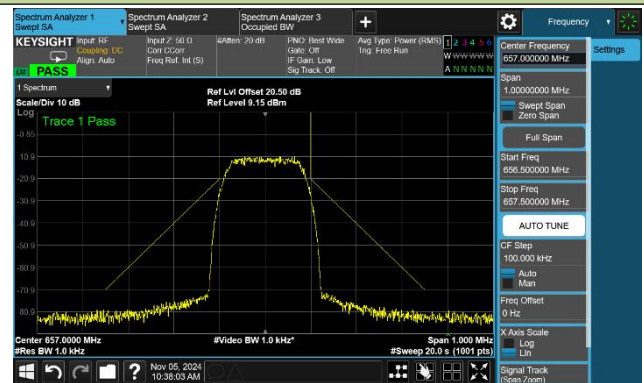


Channel 662.875MHz

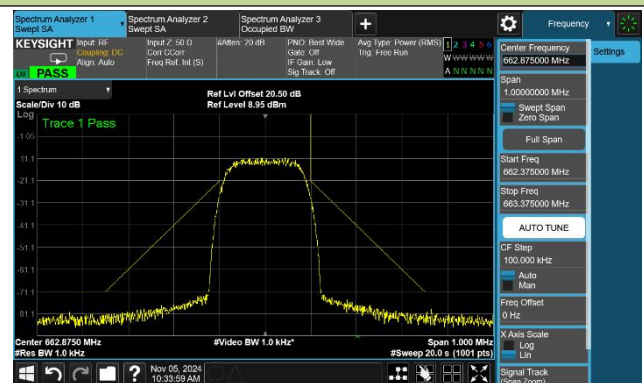


Port C


Channel 606.000MHz

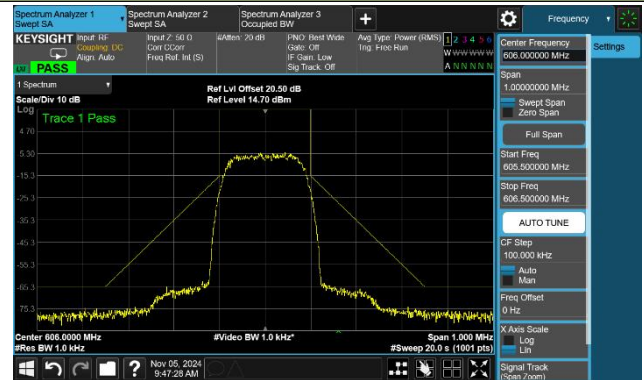

Channel 607.875 MHz

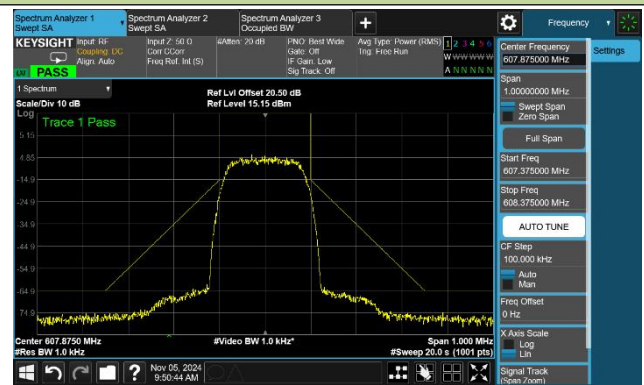


Channel 614.125 MHz

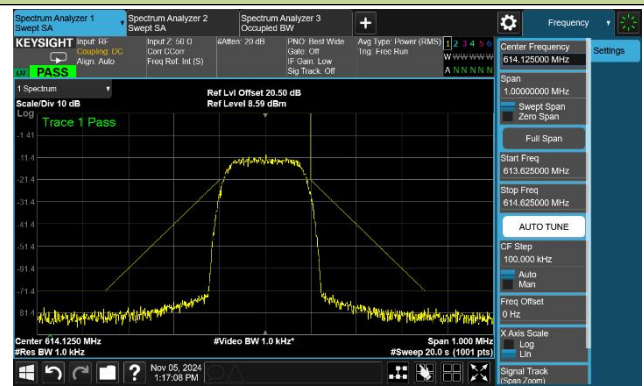


Port C


Channel 615.875MHz

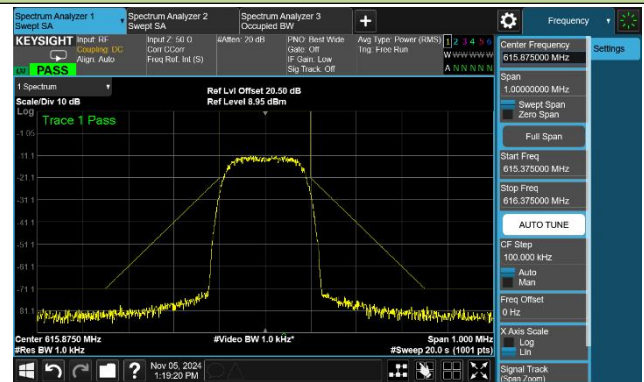

Channel 657.000MHz

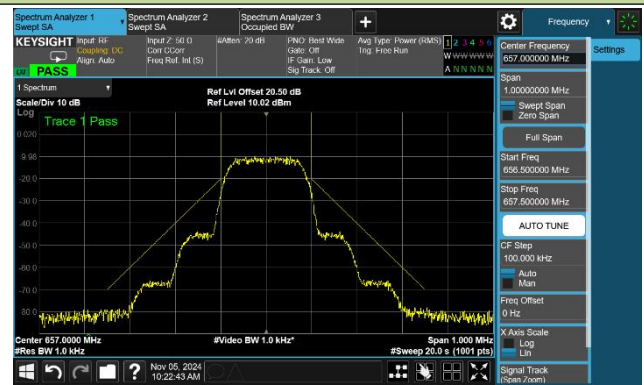


Channel 662.875MHz

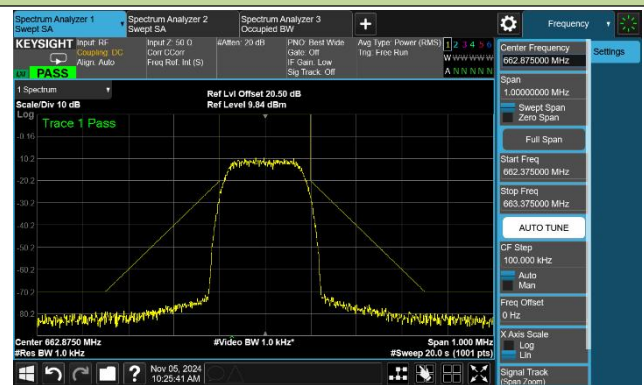


Port D


Channel 606.000MHz

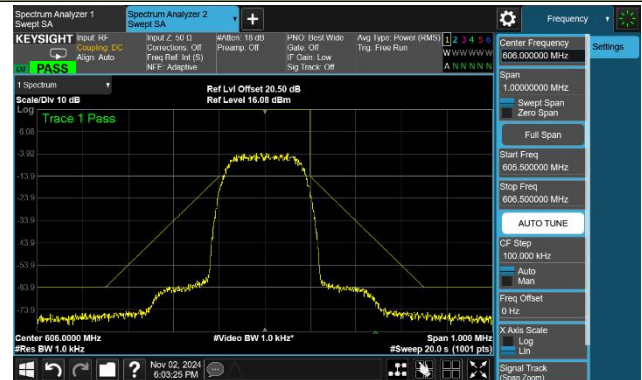

Channel 607.875 MHz

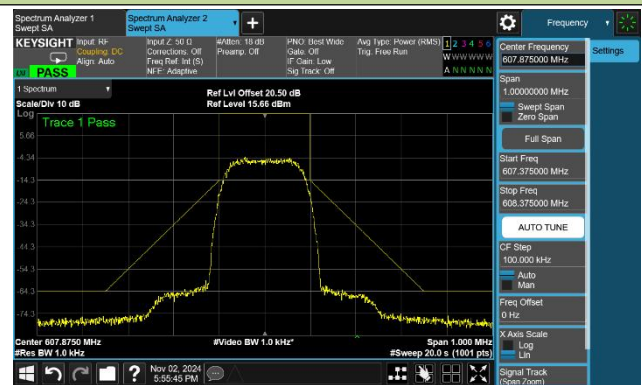


Channel 614.125 MHz

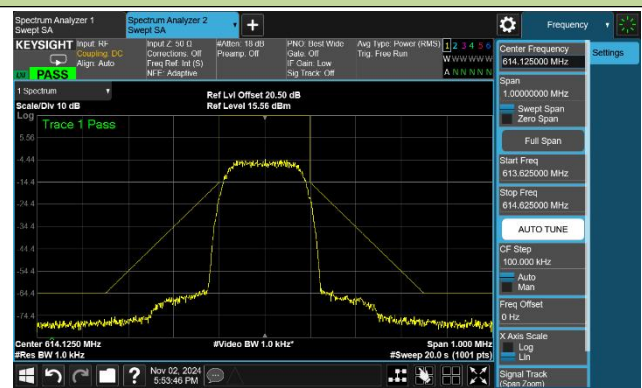


Port D


Channel 615.875MHz

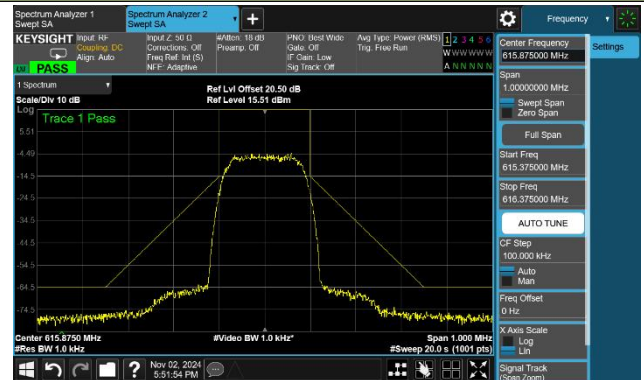

Channel 657.000MHz

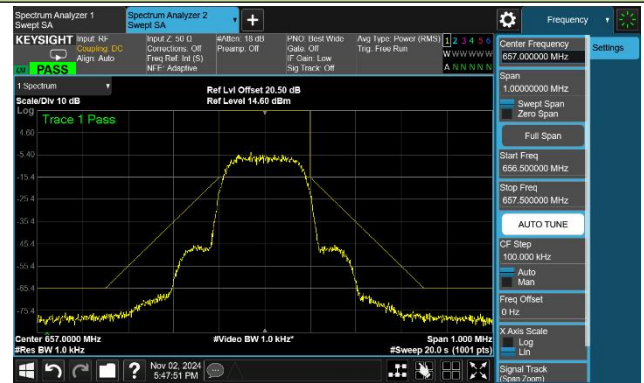

Channel 662.875MHz

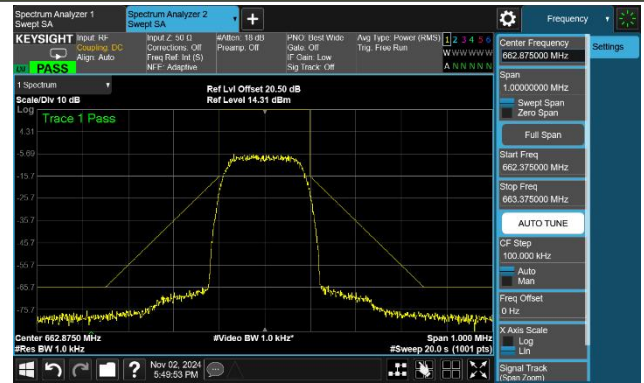

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 1 Single Port

Frequency (MHz)	Conducted Output Power (dBm)				Antenna Gain (dBi)	Max. EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D				
50/10mW Power Level								
606.000	16.50	16.65	15.56	15.23	0.30	16.95	≤ 16.99	Pass
607.875	16.60	16.68	15.62	15.18	0.30	16.98	≤ 16.99	Pass
614.125	10.81	11.69	10.56	9.30	0.30	11.99	≤ 13.01	Pass
615.875	10.80	11.67	10.68	9.31	0.30	11.97	≤ 13.01	Pass
657.000	10.56	10.85	10.64	9.76	0.30	11.15	≤ 13.01	Pass
662.875	10.22	10.81	9.28	9.64	0.30	11.11	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Max. Conducted Output Power (dBm) is Maximum Conducted Output Power from Port A/ Port B/ Port C/ Port D.

Note 4: Max. EIRP (dBm) = Max. Conducted Output Power (dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 1 with AD8C

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
	Port A				
50/10mW Power Level					
606.000	14.66	0.30	14.96	≤ 16.99	Pass
607.875	14.70	0.30	15.00	≤ 16.99	Pass
614.125	8.90	0.30	9.20	≤ 13.01	Pass
615.875	8.92	0.30	9.22	≤ 13.01	Pass
657.000	8.67	0.30	8.97	≤ 13.01	Pass
662.875	8.40	0.30	8.70	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 1 Multi Ports

Frequency (MHz)	Conducted Output Power (dBm)				Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D					
10/4mW Power Level									
606.000	10.38	11.47	10.77	9.86	16.68	0.30	16.98	≤ 16.99	Pass
607.875	10.26	11.43	10.74	9.80	16.62	0.30	16.92	≤ 16.99	Pass
614.125	6.26	7.34	6.68	5.76	12.57	0.30	12.87	≤ 13.01	Pass
615.875	6.19	7.36	6.64	5.76	12.55	0.30	12.85	≤ 13.01	Pass
657.000	6.03	6.65	6.49	6.13	12.35	0.30	12.65	≤ 13.01	Pass
662.875	5.81	6.61	6.21	5.97	12.18	0.30	12.48	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port B}/10)} + 10^{(\text{Port C}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power dBm + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 2

Frequency (MHz)				Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
F1	F2	F3	F4					
10/4mW Power Level								
606.000	606.350	606.700	607.050	15.45	0.30	15.75	≤ 16.99	Pass
607.875	607.525	607.175	606.825	15.49	0.30	15.79	≤ 16.99	Pass
614.125	614.475	614.825	615.175	11.25	0.30	11.55	≤ 13.01	Pass
615.875	615.525	615.175	614.825	11.20	0.30	11.50	≤ 13.01	Pass
657.000	657.350	657.700	658.050	10.86	0.30	11.16	≤ 13.01	Pass
662.875	662.525	662.175	661.825	10.79	0.30	11.09	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Power dBm + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 3 Single Port

Frequency (MHz)	Conducted Output Power (dBm)				Antenna Gain (dBi)	Max. EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D				
50/10mW Power Level								
606.000	14.96	16.41	16.03	15.84	0.30	16.71	≤ 16.99	Pass
607.875	15.02	16.42	16.02	15.83	0.30	16.72	≤ 16.99	Pass
614.125	9.34	10.36	9.98	9.81	0.30	10.66	≤ 13.01	Pass
615.875	9.42	10.28	9.93	9.85	0.30	10.58	≤ 13.01	Pass
657.000	9.60	10.21	9.71	10.65	0.30	10.95	≤ 13.01	Pass
662.875	9.22	10.18	9.56	10.55	0.30	10.85	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Max. Conducted Output Power (dBm) is Maximum Conducted Output Power from Port A/ Port B/ Port C/ Port D.

Note 4: Max. EIRP (dBm) = Max. Conducted Output Power (dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 3 with AD8C

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
	Port A				
50/10mW Power Level					
606.000	14.25	0.30	14.55	≤ 16.99	Pass
607.875	14.22	0.30	14.52	≤ 16.99	Pass
614.125	6.64	0.30	6.94	≤ 13.01	Pass
615.875	6.68	0.30	6.98	≤ 13.01	Pass
657.000	9.42	0.30	9.72	≤ 13.01	Pass
662.875	8.56	0.30	8.86	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 3 Multi Ports

Frequency (MHz)	Conducted Output Power (dBm)				Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D					
10/4mW Power Level									
606.000	9.69	10.87	10.19	9.71	16.16	0.30	16.46	≤ 16.99	Pass
607.875	9.68	10.90	10.10	9.91	16.19	0.30	16.49	≤ 16.99	Pass
614.125	5.81	6.81	6.04	5.88	12.17	0.30	12.47	≤ 13.01	Pass
615.875	5.82	6.78	6.00	5.89	12.16	0.30	12.46	≤ 13.01	Pass
657.000	6.15	6.46	5.98	6.36	12.26	0.30	12.56	≤ 13.01	Pass
662.875	5.84	6.37	5.70	6.20	12.06	0.30	12.36	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port B}/10)} + 10^{(\text{Port C}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power dBm + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 4

Frequency (MHz)				Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
F1	F2	F3	F4					
10/4mW Power Level								
606.000	606.350	606.700	607.050	16.03	0.30	16.33	≤ 16.99	Pass
607.875	607.525	607.175	606.825	16.15	0.30	16.45	≤ 16.99	Pass
614.125	614.475	614.825	615.175	12.11	0.30	12.41	≤ 13.01	Pass
615.875	615.525	615.175	614.825	12.39	0.30	12.69	≤ 13.01	Pass
657.000	657.350	657.700	658.050	11.90	0.30	12.20	≤ 13.01	Pass
662.875	662.525	662.175	661.825	11.77	0.30	12.07	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Power dBm + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 5

Frequency (MHz)	Conducted Output Power (dBm)				Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D					
10/4mW Power Level									
606.000	8.95	10.62	10.11	9.91	15.96	0.30	16.26	≤ 16.99	Pass
607.875	9.12	10.55	10.12	9.85	15.96	0.30	16.26	≤ 16.99	Pass
614.125	5.41	6.54	6.13	5.81	12.01	0.30	12.31	≤ 13.01	Pass
615.875	5.53	6.52	6.12	5.80	12.03	0.30	12.33	≤ 13.01	Pass
657.000	5.86	6.22	6.06	6.30	12.13	0.30	12.43	≤ 13.01	Pass
662.875	5.60	6.23	5.77	6.15	11.97	0.30	12.27	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port B}/10)} + 10^{(\text{Port C}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power dBm + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 6

Frequency (MHz)		Conducted Output Power (dBm)		Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
F1	F2	Port A	Port D					
10/4mW Power Level								
606.000	606.350	14.04	13.27	16.68	0.30	16.98	≤ 16.99	Pass
607.875	607.525	14.07	13.24	16.69	0.30	16.99	≤ 16.99	Pass
614.125	614.475	10.02	9.25	12.66	0.30	12.96	≤ 13.01	Pass
615.875	615.525	10.00	9.27	12.66	0.30	12.96	≤ 13.01	Pass
657.000	657.350	9.56	9.50	12.54	0.30	12.84	≤ 13.01	Pass
662.875	662.525	9.31	9.32	12.33	0.30	12.63	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power (dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 7

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
50/10mW Power Level					
606.275	16.33	0.30	16.63	≤ 16.99	Pass
607.600	16.23	0.30	16.53	≤ 16.99	Pass
657.000	9.36	0.30	9.66	≤ 13.01	Pass
662.600	9.03	0.30	9.33	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Power dBm + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 7 with AD8C

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
	Port A				
50/10mW Power Level					
606.275	15.06	0.30	15.36	≤ 16.99	Pass
607.600	15.13	0.30	15.43	≤ 16.99	Pass
657.000	6.95	0.30	7.25	≤ 13.01	Pass
662.600	6.85	0.30	7.15	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Power dBm + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 8 Single Port

Frequency (MHz)	Conducted Output Power (dBm)				Antenna Gain (dBi)	Max. EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D				
50/10mW Power Level								
606.275	15.76	16.35	15.67	15.84	0.30	16.65	≤ 16.99	Pass
607.600	15.71	16.57	15.95	16.01	0.30	16.87	≤ 16.99	Pass
657.000	9.93	9.61	10.03	10.84	0.30	11.14	≤ 13.01	Pass
662.600	9.60	9.47	9.67	10.71	0.30	11.01	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Max. Conducted Output Power (dBm) is Maximum Conducted Output Power from Port A/ Port B/ Port C/ Port D.

Note 4: Max. EIRP (dBm) = Max. Conducted Output Power (dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-11-24 ~ 2024-11-28	Test Mode	Mode 8 Multi Ports

Frequency (MHz)	Conducted Output Power (dBm)				Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D					
10/4mW Power Level									
606.275	9.02	10.38	9.51	9.48	15.95	0.30	16.25	≤ 16.99	Pass
607.600	8.99	10.53	9.46	9.48	15.97	0.30	16.27	≤ 16.99	Pass
657.000	5.60	6.13	5.90	6.01	12.24	0.30	12.54	≤ 13.01	Pass
662.600	5.30	6.12	5.38	5.98	12.03	0.30	12.33	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port B}/10)} + 10^{(\text{Port C}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 9

Frequency (MHz)	Conducted Output Power (dBm)		Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port D					
20/10mW Power Level							
606.275	12.32	12.01	14.35	0.30	14.65	≤ 16.99	Pass
607.600	12.41	11.84	14.21	0.30	14.51	≤ 16.99	Pass
657.000	8.91	8.42	11.68	0.30	11.98	≤ 13.01	Pass
662.600	8.81	8.29	11.57	0.30	11.87	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power (dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 10 Single Port

Frequency (MHz)	Conducted Output Power (dBm)				Antenna Gain (dBi)	Max. EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D				
50/10mW Power Level								
606.000	15.09	16.18	15.47	15.06	0.30	16.48	≤ 16.99	Pass
607.875	15.11	16.12	15.62	15.01	0.30	16.42	≤ 16.99	Pass
614.125	9.09	9.98	9.61	9.06	0.30	10.28	≤ 13.01	Pass
615.875	9.13	9.93	9.58	9.04	0.30	10.23	≤ 13.01	Pass
657.000	9.29	9.75	9.38	9.79	0.30	10.09	≤ 13.01	Pass
662.875	8.92	9.66	9.10	9.64	0.30	9.96	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Max. Conducted Output Power (dBm) is Maximum Conducted Output Power from Port A/ Port B/ Port C/ Port D.

Note 4: Max. EIRP (dBm) = Max. Conducted Output Power (dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-11-24 ~ 2024-11-28	Test Mode	Mode 10 Multi Ports

Frequency (MHz)	Conducted Output Power (dBm)				Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
	Port A	Port B	Port C	Port D					
10/4mW Power Level									
606.000	9.22	10.80	9.98	9.75	16.00	0.30	16.30	≤ 16.99	Pass
607.875	9.53	10.68	9.98	9.68	16.01	0.30	16.31	≤ 16.99	Pass
614.125	5.48	6.72	6.08	5.95	12.10	0.30	12.40	≤ 13.01	Pass
615.875	5.61	6.66	6.22	6.06	12.17	0.30	12.47	≤ 13.01	Pass
657.000	6.03	6.53	6.22	6.55	12.36	0.30	12.66	≤ 13.01	Pass
662.875	5.71	6.29	5.87	6.65	12.17	0.30	12.47	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port B}/10)} + 10^{(\text{Port C}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-11-13	Test Mode	Mode 10 with AD8C

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
	Port A				
50/10mW Power Level					
606.000	14.66	0.30	14.96	≤ 16.99	Pass
607.875	14.53	0.30	14.83	≤ 16.99	Pass
614.125	8.76	0.30	9.06	≤ 13.01	Pass
615.875	9.14	0.30	9.44	≤ 13.01	Pass
657.000	7.83	0.30	8.13	≤ 13.01	Pass
662.875	7.50	0.30	7.80	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-10-25	Test Mode	Mode 11

Frequency (MHz)				Conducted Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Test Result
F1	F2	F3	F4					
10/4mW Power Level								
606.000	606.350	606.700	607.050	16.38	0.30	16.68	≤ 16.99	Pass
607.875	607.525	607.175	606.825	16.35	0.30	16.65	≤ 16.99	Pass
614.125	614.475	614.825	615.175	12.55	0.30	12.85	≤ 13.01	Pass
615.875	615.525	615.175	614.825	12.44	0.30	12.74	≤ 13.01	Pass
657.000	657.350	657.700	658.050	12.39	0.30	12.69	≤ 13.01	Pass
662.875	662.525	662.175	661.825	12.36	0.30	12.66	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: EIRP (dBm) = Conducted Power dBm) + Antenna Gain (dBi).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-11-14	Test Mode	Mode 15

Frequency (MHz)		Conducted Output Power (dBm)		Total Conducted Output Power (dBm)	Antenna Gain (dBi)	Total EIRP (dBm)	Limit (dBm)	Test Result
F1	F2	Port A	Port D					
10/4mW Power Level								
606.275	607.425	13.33	13.02	16.19	0.30	16.49	≤ 16.99	Pass
607.600	606.575	13.44	13.09	16.28	0.30	16.58	≤ 16.99	Pass
657.000	658.200	9.17	8.88	12.04	0.30	12.34	≤ 13.01	Pass
662.600	661.550	8.97	8.60	11.80	0.30	12.10	≤ 13.01	Pass

Note 1: Limit = $10 \cdot \log(50\text{mW}) = 16.99 \text{ dBm}$.

Note 2: Limit = $10 \cdot \log(20\text{mW}) = 13.01 \text{ dBm}$.

Note 3: Total Conducted Output Power (dBm) = $10 \cdot \log(10^{(\text{Port A}/10)} + 10^{(\text{Port D}/10)}) \text{ (dBm)}$.

Note 4: Total EIRP (dBm) = Total Conducted Output Power (dBm) + Antenna Gain (dBi).

A.5 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-15 ~ 2024-08-18	Test Mode	Mode 1 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	54.638	-106.3	29.3	-77.0	-54.0	-23.0	Peak	Horizontal
	725.975	-101.0	37.1	-63.9	-54.0	-9.9	Peak	Horizontal
	93.147	-98.1	38.6	-59.5	-54.0	-5.5	Peak	Vertical
	574.558	-95.0	35.3	-59.7	-54.0	-5.7	Peak	Vertical
	1211.800	-54.1	5.8	-48.3	-30.0	-18.3	Peak	Horizontal
	1817.800	-54.1	5.3	-48.8	-30.0	-18.8	Peak	Horizontal
	1211.800	-59.2	6.1	-53.1	-30.0	-23.1	Peak	Vertical
	1818.400	-61.4	6.3	-55.1	-30.0	-25.1	Peak	Vertical
607.875	110.025	-95.1	23.7	-71.4	-54.0	-17.4	Peak	Horizontal
	716.081	-101.5	37.5	-64.0	-54.0	-10.0	Peak	Horizontal
	92.177	-98.5	37.6	-60.9	-54.0	-6.9	Peak	Vertical
	556.904	-93.9	34.7	-59.2	-54.0	-5.2	Peak	Vertical
	1216.000	-64.8	5.9	-58.9	-30.0	-28.9	Peak	Horizontal
	2464.600	-65.5	7.9	-57.6	-30.0	-27.6	Peak	Horizontal
	2460.400	-60.6	6.7	-53.9	-30.0	-23.9	Peak	Vertical
	5179.000	-66.3	12.4	-53.9	-30.0	-23.9	Peak	Vertical
614.125	214.397	-101.4	27.4	-74.0	-54.0	-20.0	Peak	Horizontal
	681.355	-101.1	37.1	-64.0	-54.0	-10.0	Peak	Horizontal
	566.507	-95.6	32.8	-62.8	-54.0	-8.8	Peak	Vertical
	683.780	-100.4	36.2	-64.2	-54.0	-10.2	Peak	Vertical
	1484.200	-63.5	5.0	-58.5	-30.0	-28.5	Peak	Horizontal
	4707.400	-67.2	15.4	-51.8	-30.0	-21.8	Peak	Horizontal
	1354.000	-65.3	6.4	-58.9	-30.0	-28.9	Peak	Vertical
	4806.400	-69.1	16.3	-52.8	-30.0	-22.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	517.522	-101.8	32.7	-69.1	-54.0	-15.1	Peak	Horizontal
	717.730	-101.9	37.8	-64.1	-54.0	-10.1	Peak	Horizontal
	522.081	-94.8	32.1	-62.7	-54.0	-8.7	Peak	Vertical
	726.072	-98.9	36.1	-62.8	-54.0	-8.8	Peak	Vertical
	1289.800	-63.5	5.2	-58.3	-30.0	-28.3	Peak	Horizontal
	4809.400	-68.3	15.9	-52.4	-30.0	-22.4	Peak	Horizontal
	1187.800	-63.1	6.1	-57.0	-30.0	-27.0	Peak	Vertical
	5282.200	-68.4	17.8	-50.6	-30.0	-20.6	Peak	Vertical
657.000	90.819	-95.7	23.3	-72.4	-54.0	-18.4	Peak	Horizontal
	737.615	-102.2	37.2	-65.0	-54.0	-11.0	Peak	Horizontal
	98.288	-104.1	39.1	-65.0	-54.0	-11.0	Peak	Vertical
	570.775	-96.6	34.5	-62.1	-54.0	-8.1	Peak	Vertical
	2212.600	-65.4	8.7	-56.7	-30.0	-26.7	Peak	Horizontal
	6184.600	-68.6	17.8	-50.8	-30.0	-20.8	Peak	Horizontal
	2151.400	-65.1	8.6	-56.5	-30.0	-26.5	Peak	Vertical
	5897.800	-69.9	19.0	-50.9	-30.0	-20.9	Peak	Vertical
662.875	541.966	-101.5	32.0	-69.5	-54.0	-15.5	Peak	Horizontal
	685.526	-101.7	37.0	-64.7	-54.0	-10.7	Peak	Horizontal
	535.661	-94.3	31.6	-62.7	-54.0	-8.7	Peak	Vertical
	721.998	-99.2	36.6	-62.6	-54.0	-8.6	Peak	Vertical
	2431.000	-65.7	8.8	-56.9	-30.0	-26.9	Peak	Horizontal
	5540.200	-68.3	17.4	-50.9	-30.0	-20.9	Peak	Horizontal
	2417.200	-65.7	9.4	-56.3	-30.0	-26.3	Peak	Vertical
	5068.000	-68.9	17.5	-51.4	-30.0	-21.4	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-16 ~ 2024-08-18	Test Mode	Mode 1 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	519.268	-101.2	32.8	-68.4	-54.0	-14.4	Peak	Horizontal
	686.205	-98.4	37.1	-61.3	-54.0	-7.3	Peak	Horizontal
	593.958	-91.6	33.9	-57.7	-54.0	-3.7	Peak	Vertical
	687.272	-97.6	36.0	-61.6	-54.0	-7.6	Peak	Vertical
	1211.800	-58.7	3.8	-54.9	-30.0	-24.9	Peak	Horizontal
	3271.600	-65.8	11.9	-53.9	-30.0	-23.9	Peak	Horizontal
	1211.800	-61.7	5.0	-56.7	-30.0	-26.7	Peak	Vertical
	3575.800	-66.7	13.1	-53.6	-30.0	-23.6	Peak	Vertical
607.875	680.385	-97.5	36.7	-60.8	-54.0	-6.8	Peak	Horizontal
	847.904	-98.7	37.3	-61.4	-54.0	-7.4	Peak	Horizontal
	591.048	-91.4	34.0	-57.4	-54.0	-3.4	Peak	Vertical
	675.244	-97.1	35.6	-61.5	-54.0	-7.5	Peak	Vertical
	1216.000	-58.3	3.4	-54.9	-30.0	-24.9	Peak	Horizontal
	3584.800	-67.1	13.0	-54.1	-30.0	-24.1	Peak	Horizontal
	1216.000	-60.0	4.3	-55.7	-30.0	-25.7	Peak	Vertical
	3455.800	-66.3	12.3	-54.0	-30.0	-24.0	Peak	Vertical
614.125	502.487	-100.7	31.5	-69.2	-54.0	-15.2	Peak	Horizontal
	683.489	-99.8	37.0	-62.8	-54.0	-8.8	Peak	Horizontal
	523.924	-93.3	31.6	-61.7	-54.0	-7.7	Peak	Vertical
	685.332	-99.4	36.3	-63.1	-54.0	-9.1	Peak	Vertical
	1357.600	-64.2	5.4	-58.8	-30.0	-28.8	Peak	Horizontal
	4705.000	-68.0	15.4	-52.6	-30.0	-22.6	Peak	Horizontal
	1367.200	-64.7	6.5	-58.2	-30.0	-28.2	Peak	Vertical
	3674.800	-67.9	13.8	-54.1	-30.0	-24.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	531.975	-100.7	32.3	-68.4	-54.0	-14.4	Peak	Horizontal
	717.051	-100.9	37.8	-63.1	-54.0	-9.1	Peak	Horizontal
	552.539	-92.6	31.8	-60.8	-54.0	-6.8	Peak	Vertical
	656.135	-97.6	35.4	-62.2	-54.0	-8.2	Peak	Vertical
	1347.400	-63.2	4.8	-58.4	-30.0	-28.4	Peak	Horizontal
	4815.400	-68.7	16.1	-52.6	-30.0	-22.6	Peak	Horizontal
	1183.000	-63.0	5.7	-57.3	-30.0	-27.3	Peak	Vertical
	5137.000	-69.2	17.5	-51.7	-30.0	-21.7	Peak	Vertical
657.000	96.251	-104.4	39.3	-65.1	-54.0	-11.1	Peak	Horizontal
	761.865	-103.0	37.9	-65.1	-54.0	-11.1	Peak	Horizontal
	96.542	-103.4	39.2	-64.2	-54.0	-10.2	Peak	Vertical
	549.241	-98.2	34.2	-64.0	-54.0	-10.0	Peak	Vertical
	1370.800	-63.7	5.7	-58.0	-30.0	-28.0	Peak	Horizontal
	5614.600	-68.2	16.9	-51.3	-30.0	-21.3	Peak	Horizontal
	1369.600	-64.0	6.5	-57.5	-30.0	-27.5	Peak	Vertical
	4025.200	-68.0	14.7	-53.3	-30.0	-23.3	Peak	Vertical
662.875	519.365	-101.7	32.8	-68.9	-54.0	-14.9	Peak	Horizontal
	688.727	-99.1	36.8	-62.3	-54.0	-8.3	Peak	Horizontal
	565.828	-94.2	32.7	-61.5	-54.0	-7.5	Peak	Vertical
	677.475	-98.6	35.6	-63.0	-54.0	-9.0	Peak	Vertical
	1477.000	-64.5	5.0	-59.5	-30.0	-29.5	Peak	Horizontal
	4794.400	-68.0	15.3	-52.7	-30.0	-22.7	Peak	Horizontal
	1366.000	-64.0	6.5	-57.5	-30.0	-27.5	Peak	Vertical
	4805.800	-68.7	16.3	-52.4	-30.0	-22.4	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-16 ~ 2024-11-18	Test Mode	Mode 1 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	572.812	-96.9	33.6	-63.3	-54.0	-9.3	Peak	Horizontal
	687.951	-99.8	37.1	-62.7	-54.0	-8.7	Peak	Horizontal
	566.895	-91.9	33.1	-58.8	-54.0	-4.8	Peak	Vertical
	710.843	-97.4	37.0	-60.4	-54.0	-6.4	Peak	Vertical
	1212.400	-58.2	3.7	-54.5	-30.0	-24.5	Peak	Horizontal
	3501.400	-66.3	12.2	-54.1	-30.0	-24.1	Peak	Horizontal
	1212.400	-60.7	4.9	-55.8	-30.0	-25.8	Peak	Vertical
	3594.400	-68.0	13.5	-54.5	-30.0	-24.5	Peak	Vertical
607.875	539.347	-100.5	32.4	-68.1	-54.0	-14.1	Peak	Horizontal
	680.967	-98.9	37.0	-61.9	-54.0	-7.9	Peak	Horizontal
	567.380	-91.9	32.8	-59.1	-54.0	-5.1	Peak	Vertical
	714.723	-97.8	36.3	-61.5	-54.0	-7.5	Peak	Vertical
	1216.000	-56.6	3.4	-53.2	-30.0	-23.2	Peak	Horizontal
	2911.000	-67.2	10.3	-56.9	-30.0	-26.9	Peak	Horizontal
	1216.000	-59.3	4.3	-55.0	-30.0	-25.0	Peak	Vertical
	4808.800	-68.7	16.4	-52.3	-30.0	-22.3	Peak	Vertical
614.125	534.982	-101.4	32.3	-69.1	-54.0	-15.1	Peak	Horizontal
	725.005	-100.5	37.1	-63.4	-54.0	-9.4	Peak	Horizontal
	569.805	-93.3	33.1	-60.2	-54.0	-6.2	Peak	Vertical
	650.509	-98.4	35.3	-63.1	-54.0	-9.1	Peak	Vertical
	2326.000	-65.5	9.1	-56.4	-30.0	-26.4	Peak	Horizontal
	4818.400	-68.2	16.1	-52.1	-30.0	-22.1	Peak	Horizontal
	1200.400	-63.5	6.1	-57.4	-30.0	-27.4	Peak	Vertical
	5149.600	-69.2	17.5	-51.7	-30.0	-21.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	574.849	-100.3	33.5	-66.8	-54.0	-12.8	Peak	Horizontal
	682.519	-100.5	37.1	-63.4	-54.0	-9.4	Peak	Horizontal
	573.976	-94.2	33.4	-60.8	-54.0	-6.8	Peak	Vertical
	718.991	-98.1	36.6	-61.5	-54.0	-7.5	Peak	Vertical
	1355.200	-64.1	5.3	-58.8	-30.0	-28.8	Peak	Horizontal
	4432.600	-68.4	15.3	-53.1	-30.0	-23.1	Peak	Horizontal
	2155.600	-65.6	8.7	-56.9	-30.0	-26.9	Peak	Vertical
	6074.800	-69.9	19.1	-50.8	-30.0	-20.8	Peak	Vertical
657.000	95.863	-104.6	39.1	-65.5	-54.0	-11.5	Peak	Horizontal
	767.782	-102.9	37.7	-65.2	-54.0	-11.2	Peak	Horizontal
	110.025	-96.1	23.6	-72.5	-54.0	-18.5	Peak	Vertical
	534.303	-94.6	34.6	-60.0	-54.0	-6.0	Peak	Vertical
	1280.800	-63.7	5.5	-58.2	-30.0	-28.2	Peak	Horizontal
	4846.600	-68.7	16.2	-52.5	-30.0	-22.5	Peak	Horizontal
	1374.400	-63.5	6.4	-57.1	-30.0	-27.1	Peak	Vertical
	4789.600	-68.5	16.0	-52.5	-30.0	-22.5	Peak	Vertical
662.875	512.187	-101.7	32.4	-69.3	-54.0	-15.3	Peak	Horizontal
	722.192	-100.8	37.5	-63.3	-54.0	-9.3	Peak	Horizontal
	569.902	-93.8	33.1	-60.7	-54.0	-6.7	Peak	Vertical
	712.201	-98.7	35.9	-62.8	-54.0	-8.8	Peak	Vertical
	2374.000	-65.7	8.5	-57.2	-30.0	-27.2	Peak	Horizontal
	4825.000	-68.7	16.3	-52.4	-30.0	-22.4	Peak	Horizontal
	1345.000	-63.1	5.7	-57.4	-30.0	-27.4	Peak	Vertical
	5940.400	-69.2	18.2	-51.0	-30.0	-21.0	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-18 ~ 2024-11-18	Test Mode	Mode 1 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	510.247	-99.8	32.6	-67.2	-54.0	-13.2	Peak	Horizontal
	682.810	-97.6	37.1	-60.5	-54.0	-6.5	Peak	Horizontal
	589.787	-90.9	33.7	-57.2	-54.0	-3.2	Peak	Vertical
	679.512	-98.0	36.2	-61.8	-54.0	-7.8	Peak	Vertical
	1212.400	-52.7	3.7	-49.0	-30.0	-19.0	Peak	Horizontal
	4674.400	-68.7	15.8	-52.9	-30.0	-22.9	Peak	Horizontal
	1212.400	-53.8	4.9	-48.9	-30.0	-18.9	Peak	Vertical
	3639.400	-67.3	13.4	-53.9	-30.0	-23.9	Peak	Vertical
607.875	488.325	-100.2	32.3	-67.9	-54.0	-13.9	Peak	Horizontal
	686.399	-97.8	37.0	-60.8	-54.0	-6.8	Peak	Horizontal
	591.533	-92.3	34.1	-58.2	-54.0	-4.2	Peak	Vertical
	681.258	-95.2	36.0	-59.2	-54.0	-5.2	Peak	Vertical
	1216.000	-53.0	3.4	-49.6	-30.0	-19.6	Peak	Horizontal
	4817.200	-67.6	16.1	-51.5	-30.0	-21.5	Peak	Horizontal
	1216.000	-54.1	4.3	-49.8	-30.0	-19.8	Peak	Vertical
	4809.400	-68.5	16.4	-52.1	-30.0	-22.1	Peak	Vertical
614.125	565.731	-101.5	33.2	-68.3	-54.0	-14.3	Peak	Horizontal
	683.489	-98.5	37.0	-61.5	-54.0	-7.5	Peak	Horizontal
	529.744	-91.4	31.6	-59.8	-54.0	-5.8	Peak	Vertical
	670.394	-96.8	35.3	-61.5	-54.0	-7.5	Peak	Vertical
	1359.400	-63.6	5.5	-58.1	-30.0	-28.1	Peak	Horizontal
	4668.400	-68.0	15.5	-52.5	-30.0	-22.5	Peak	Horizontal
	1363.000	-64.0	6.5	-57.5	-30.0	-27.5	Peak	Vertical
	5123.200	-68.1	17.3	-50.8	-30.0	-20.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	510.829	-100.9	32.6	-68.3	-54.0	-14.3	Peak	Horizontal
	688.048	-97.6	37.1	-60.5	-54.0	-6.5	Peak	Horizontal
	596.771	-94.1	34.1	-60.0	-54.0	-6.0	Peak	Vertical
	680.579	-97.9	36.0	-61.9	-54.0	-7.9	Peak	Vertical
	1190.800	-62.5	4.2	-58.3	-30.0	-28.3	Peak	Horizontal
	4997.200	-67.6	16.2	-51.4	-30.0	-21.4	Peak	Horizontal
	1190.800	-63.4	6.1	-57.3	-30.0	-27.3	Peak	Vertical
	5507.200	-68.5	18.4	-50.1	-30.0	-20.1	Peak	Vertical
657.000	99.549	-103.1	38.2	-64.9	-54.0	-10.9	Peak	Horizontal
	745.472	-101.4	37.0	-64.4	-54.0	-10.4	Peak	Horizontal
	90.916	-97.4	23.3	-74.1	-54.0	-20.1	Peak	Vertical
	689.309	-96.0	36.3	-59.7	-54.0	-5.7	Peak	Vertical
	1369.600	-62.4	5.6	-56.8	-30.0	-26.8	Peak	Horizontal
	4363.600	-68.1	14.4	-53.7	-30.0	-23.7	Peak	Horizontal
	1282.000	-63.2	5.5	-57.7	-30.0	-27.7	Peak	Vertical
	3817.600	-67.7	14.1	-53.6	-30.0	-23.6	Peak	Vertical
662.875	618.596	-99.6	33.7	-65.9	-54.0	-11.9	Peak	Horizontal
	684.653	-98.1	36.9	-61.2	-54.0	-7.2	Peak	Horizontal
	593.279	-92.7	34.1	-58.6	-54.0	-4.6	Peak	Vertical
	684.168	-98.3	36.3	-62.0	-54.0	-8.0	Peak	Vertical
	2224.600	-65.2	8.6	-56.6	-30.0	-26.6	Peak	Horizontal
	6012.400	-68.8	18.0	-50.8	-30.0	-20.8	Peak	Horizontal
	1189.600	-63.1	6.1	-57.0	-30.0	-27.0	Peak	Vertical
	5780.200	-70.0	18.5	-51.5	-30.0	-21.5	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB) Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB) Note 3: QP measurement was not performed when peak measure level was lower than the QP limit. RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-08-19 ~ 2024-11-05	Test Mode	Mode 2 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350 + 606.700 + 607.050	68.800	-96.5	26.3	-70.2	-54.0	-16.2	Peak	Horizontal
	531.490	-98.5	34.5	-64.0	-54.0	-10.0	Peak	Horizontal
	105.854	-99.3	38.8	-60.5	-54.0	-6.5	Peak	Vertical
	560.202	-97.3	36.6	-60.7	-54.0	-6.7	Peak	Vertical
	1900.600	-53.6	5.3	-48.3	-30.0	-18.3	Peak	Horizontal
	2578.000	-61.7	7.6	-54.1	-30.0	-24.1	Peak	Horizontal
	1747.600	-66.1	6.3	-59.7	-30.0	-29.7	Peak	Vertical
	3188.200	-67.0	8.6	-58.4	-30.0	-28.4	Peak	Vertical
607.875 + 607.525 + 607.175 + 606.825	110.025	-91.1	23.6	-67.5	-54.0	-13.5	Peak	Horizontal
	553.412	-97.9	34.8	-63.1	-54.0	-9.1	Peak	Horizontal
	110.025	-95.2	33.4	-61.8	-54.0	-7.8	Peak	Vertical
	544.973	-93.7	34.1	-59.6	-54.0	-5.6	Peak	Vertical
	1345.600	-64.8	7.3	-57.5	-30.0	-27.5	Peak	Horizontal
	3139.000	-65.4	9.8	-55.6	-30.0	-25.6	Peak	Horizontal
	1392.400	-65.7	6.5	-59.2	-30.0	-29.2	Peak	Vertical
	3184.600	-66.3	8.6	-57.7	-30.0	-27.7	Peak	Vertical
614.125 + 614.475 + 614.825 + 615.175	682.519	-103.4	37.1	-66.3	-54.0	-12.3	Peak	Horizontal
	829.474	-102.2	37.4	-64.8	-54.0	-10.8	Peak	Horizontal
	92.080	-94.8	30.6	-64.2	-54.0	-10.2	Peak	Vertical
	715.402	-103.0	36.3	-66.7	-54.0	-12.7	Peak	Vertical
	1230.277	-59.4	3.0	-56.4	-30.0	-26.4	Peak	Horizontal
	3589.020	-66.2	13.0	-53.2	-30.0	-23.2	Peak	Horizontal
	1358.107	-62.9	6.6	-56.3	-30.0	-26.3	Peak	Vertical
	3354.679	-64.7	12.1	-52.6	-30.0	-22.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875 + 615.525 + 615.175 + 614.825	544.682	-103.4	32.6	-70.8	-54.0	-16.8	Peak	Horizontal
	723.356	-102.6	37.2	-65.4	-54.0	-11.4	Peak	Horizontal
	105.854	-93.3	29.9	-63.4	-54.0	-9.4	Peak	Vertical
	838.107	-103.7	37.9	-65.8	-54.0	-11.8	Peak	Vertical
	1230.038	-58.9	3.0	-55.9	-30.0	-25.9	Peak	Horizontal
	3359.906	-66.3	12.0	-54.3	-30.0	-24.3	Peak	Horizontal
	1188.625	-62.1	6.1	-56.0	-30.0	-26.0	Peak	Vertical
	3594.612	-65.3	13.5	-51.8	-30.0	-21.8	Peak	Vertical
657.000 + 657.350 + 657.700 + 658.050	102.071	-85.9	19.4	-66.5	-54.0	-12.5	Peak	Horizontal
	686.593	-101.0	36.9	-64.1	-54.0	-10.1	Peak	Horizontal
	90.916	-93.2	31.1	-62.1	-54.0	-8.1	Peak	Vertical
	565.149	-95.6	32.3	-63.3	-54.0	-9.3	Peak	Vertical
	1373.800	-63.4	5.7	-57.7	-30.0	-27.7	Peak	Horizontal
	5090.200	-68.8	16.6	-52.2	-30.0	-22.2	Peak	Horizontal
	2427.400	-66.1	9.3	-56.8	-30.0	-26.8	Peak	Vertical
	5066.800	-68.0	17.5	-50.5	-30.0	-20.5	Peak	Vertical
662.875 + 662.525 + 662.175 + 661.825	106.824	-86.1	19.7	-66.4	-54.0	-12.4	Peak	Horizontal
	689.115	-101.8	36.7	-65.1	-54.0	-11.1	Peak	Horizontal
	92.177	-91.0	30.5	-60.5	-54.0	-6.5	Peak	Vertical
	576.401	-95.9	33.2	-62.7	-54.0	-8.7	Peak	Vertical
	2234.200	-65.3	8.5	-56.8	-30.0	-26.8	Peak	Horizontal
	4842.400	-68.0	16.3	-51.7	-30.0	-21.7	Peak	Horizontal
	1347.400	-63.1	5.8	-57.3	-30.0	-27.3	Peak	Vertical
	5573.800	-68.6	18.4	-50.2	-30.0	-20.2	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-18 ~ 2024-08-31	Test Mode	Mode 3 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	679.483	-99.9	36.5	-63.4	-54.0	-9.4	Peak	Horizontal
	708.934	-100.1	37.0	-63.1	-54.0	-9.1	Peak	Horizontal
	591.181	-93.0	34.0	-59.0	-54.0	-5.0	Peak	Vertical
	618.103	-93.8	34.8	-59.0	-54.0	-5.0	Peak	Vertical
	1212.400	-42.8	3.7	-39.1	-30.0	-9.1	Peak	Horizontal
	1817.800	-51.3	4.6	-46.7	-30.0	-16.7	Peak	Horizontal
	1212.400	-44.7	4.9	-39.8	-30.0	-9.8	Peak	Vertical
	1818.400	-55.4	5.2	-50.2	-30.0	-20.2	Peak	Vertical
607.875	684.986	-99.4	36.9	-62.5	-54.0	-8.5	Peak	Horizontal
	708.934	-100.9	37.0	-63.9	-54.0	-9.9	Peak	Horizontal
	581.518	-95.3	33.5	-61.8	-54.0	-7.8	Peak	Vertical
	615.508	-95.5	34.3	-61.2	-54.0	-7.2	Peak	Vertical
	1216.000	-42.3	3.4	-38.9	-30.0	-8.9	Peak	Horizontal
	1823.800	-54.9	4.6	-50.3	-30.0	-20.3	Peak	Horizontal
	1216.000	-48.4	4.3	-44.1	-30.0	-14.1	Peak	Vertical
	1823.800	-54.6	5.3	-49.3	-30.0	-19.3	Peak	Vertical
614.125	680.914	-102.3	37.0	-65.3	-54.0	-11.3	Peak	Horizontal
	717.185	-102.9	37.9	-65.0	-54.0	-11.0	Peak	Horizontal
	566.225	-97.2	32.8	-64.4	-54.0	-10.4	Peak	Vertical
	646.705	-100.4	34.9	-65.5	-54.0	-11.5	Peak	Vertical
	2402.800	-65.8	8.6	-57.2	-30.0	-27.2	Peak	Horizontal
	5656.600	-69.3	17.6	-51.7	-30.0	-21.7	Peak	Horizontal
	1196.800	-63.3	6.1	-57.2	-30.0	-27.2	Peak	Vertical
	4671.400	-68.4	16.5	-51.9	-30.0	-21.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	573.217	-103.0	33.7	-69.3	-54.0	-15.3	Peak	Horizontal
	721.726	-103.0	37.4	-65.6	-54.0	-11.6	Peak	Horizontal
	573.217	-96.9	33.3	-63.6	-54.0	-9.6	Peak	Vertical
	661.151	-100.3	35.2	-65.1	-54.0	-11.1	Peak	Vertical
	1232.200	-61.2	3.0	-58.2	-30.0	-28.2	Peak	Horizontal
	2173.600	-64.0	8.9	-55.1	-30.0	-25.1	Peak	Horizontal
	1358.200	-64.2	6.6	-57.6	-30.0	-27.6	Peak	Vertical
	4511.200	-67.8	15.2	-52.6	-30.0	-22.6	Peak	Vertical
657.000	98.870	-104.6	38.8	-65.8	-54.0	-11.8	Peak	Horizontal
	771.468	-101.1	37.4	-63.7	-54.0	-9.7	Peak	Horizontal
	215.561	-103.7	31.5	-72.2	-54.0	-18.2	Peak	Vertical
	533.624	-93.7	34.7	-59.0	-54.0	-5.0	Peak	Vertical
	1282.000	-64.3	5.44	-58.9	-30.0	-28.9	Peak	Horizontal
	5115.400	-69.5	16.6	-52.9	-30.0	-22.9	Peak	Horizontal
	1189.000	-63.9	6.1	-57.8	-30.0	-27.8	Peak	Vertical
	3695.200	-67.9	13.8	-54.1	-30.0	-24.1	Peak	Vertical
662.875	562.627	-101.7	33.2	-68.5	-54.0	-14.5	Peak	Horizontal
	724.132	-102.2	37.1	-65.1	-54.0	-11.1	Peak	Horizontal
	578.244	-97.6	33.3	-64.3	-54.0	-10.3	Peak	Vertical
	709.291	-99.3	35.3	-64.0	-54.0	-10.0	Peak	Vertical
	2435.200	-66.2	8.6	-57.6	-30.0	-27.6	Peak	Horizontal
	5060.200	-68.5	16.5	-52.0	-30.0	-22.0	Peak	Horizontal
	1360.600	-63.2	6.6	-56.6	-30.0	-26.6	Peak	Vertical
	3604.600	-67.5	13.5	-54.0	-30.0	-24.0	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-18 ~ 2024-08-13	Test Mode	Mode 3 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	691.744	-98.4	36.7	-61.7	-54.0	-7.7	Peak	Horizontal
	846.274	-98.9	37.4	-61.5	-54.0	-7.5	Peak	Horizontal
	618.103	-93.6	34.8	-58.8	-54.0	-4.8	Peak	Vertical
	846.274	-99.3	37.0	-62.2	-54.0	-8.2	Peak	Vertical
	1212.400	-47.8	3.7	-44.1	-30.0	-14.1	RMS	Horizontal
	1818.400	-58.6	4.6	-54.0	-30.0	-24.0	Peak	Horizontal
	1212.400	-46.2	4.9	-41.3	-30.0	-11.3	Peak	Vertical
	1818.400	-56.1	5.2	-50.9	-30.0	-20.9	Peak	Vertical
607.875	685.466	-98.2	37.0	-61.2	-54.0	-7.2	Peak	Horizontal
	848.056	-102.9	37.3	-65.6	-54.0	-11.6	Peak	Horizontal
	565.233	-93.3	32.3	-61.0	-54.0	-7.0	Peak	Vertical
	615.508	-94.0	34.3	-59.7	-54.0	-5.7	Peak	Vertical
	1216.000	-41.7	3.4	-38.2	-30.0	-8.2	Peak	Horizontal
	1823.800	-57.2	4.6	-52.6	-30.0	-22.6	Peak	Horizontal
	1216.000	-46.9	4.3	-42.6	-30.0	-12.6	Peak	Vertical
	1823.800	-57.6	5.3	-52.3	-30.0	-22.3	Peak	Vertical
614.125	577.454	-103.3	33.5	-69.8	-54.0	-15.8	Peak	Horizontal
	690.532	-101.8	37.0	-64.8	-54.0	-10.8	Peak	Horizontal
	570.210	-95.4	33.1	-62.3	-54.0	-8.3	Peak	Vertical
	686.669	-101.0	36.2	-64.9	-54.0	-10.9	Peak	Vertical
	1297.600	-63.0	4.8	-58.2	-30.0	-28.2	Peak	Horizontal
	4794.400	-67.5	15.3	-52.2	-30.0	-22.2	Peak	Horizontal
	1352.200	-63.6	6.2	-57.4	-30.0	-27.4	Peak	Vertical
	4481.200	-67.5	15.5	-52.1	-30.0	-22.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	622.890	-102.0	33.9	-68.2	-54.0	-14.2	622.890	Horizontal
	709.431	-100.9	37.1	-63.8	-54.0	-9.8	709.431	Horizontal
	608.853	-96.3	33.9	-62.4	-54.0	-8.4	608.853	Vertical
	684.025	-99.4	36.3	-63.2	-54.0	-9.2	684.025	Vertical
	2330.800	-65.9	9.0	-56.9	-30.0	-26.9	2330.800	Horizontal
	3807.400	-67.0	13.2	-53.8	-30.0	-23.8	3807.400	Horizontal
	1350.400	-63.4	6.1	-57.3	-30.0	-27.3	1350.400	Vertical
	4241.800	-68.1	15.2	-52.9	-30.0	-22.9	4241.800	Vertical
657.000	94.020	-104.8	38.9	-65.8	-54.0	-11.8	Peak	Horizontal
	826.564	-101.6	38.4	-63.1	-54.0	-9.1	Peak	Horizontal
	49.594	-104.8	31.4	-73.4	-54.0	-19.4	Peak	Vertical
	742.950	-101.9	37.1	-64.8	-54.0	-10.8	Peak	Vertical
	1279.000	-63.8	5.5	-58.2	-30.0	-28.2	Peak	Horizontal
	3735.400	-66.8	12.8	-54.0	-30.0	-24.0	Peak	Horizontal
	1203.400	-63.5	6.2	-57.3	-30.0	-27.3	Peak	Vertical
	4075.000	-67.6	14.0	-53.6	-30.0	-23.6	Peak	Vertical
662.875	573.016	-102.6	33.6	-69.0	-54.0	-15.0	Peak	Horizontal
	687.151	-100.1	36.7	-63.3	-54.0	-9.3	Peak	Horizontal
	567.816	-96.0	32.8	-63.2	-54.0	-9.2	Peak	Vertical
	620.057	-98.0	34.8	-63.2	-54.0	-9.2	Peak	Vertical
	1556.800	-64.2	4.6	-59.6	-30.0	-29.6	Peak	Horizontal
	3619.000	-67.2	12.9	-54.3	-30.0	-24.3	Peak	Horizontal
	1543.000	-63.4	5.2	-58.2	-30.0	-28.2	Peak	Vertical
	2969.800	-64.7	10.1	-54.6	-30.0	-24.6	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-18 ~ 2024-11-18	Test Mode	Mode 3 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	688.115	-99.0	37.0	-62.0	-54.0	-8.0	Peak	Horizontal
	712.423	-99.6	36.9	-62.8	-54.0	-8.8	Peak	Horizontal
	573.820	-92.8	33.4	-59.5	-54.0	-5.5	Peak	Vertical
	618.103	-93.8	34.8	-59.0	-54.0	-5.0	Peak	Vertical
	1212.400	-41.6	3.7	-37.8	-30.0	-7.8	Peak	Horizontal
	1818.400	-53.8	4.6	-49.2	-30.0	-19.2	Peak	Horizontal
	1211.800	-48.0	5.0	-43.0	-30.0	-13.0	Peak	Vertical
	1818.400	-55.2	5.2	-49.9	-30.0	-19.9	Peak	Vertical
607.875	681.631	-98.9	37.1	-61.8	-54.0	-7.8	Peak	Horizontal
	716.682	-100.9	37.6	-63.3	-54.0	-9.3	Peak	Horizontal
	572.213	-94.3	33.2	-61.1	-54.0	-7.1	Peak	Vertical
	621.363	-94.9	34.9	-60.0	-54.0	-6.0	Peak	Vertical
	1216.000	-42.9	3.4	-39.5	-30.0	-9.5	Peak	Horizontal
	1824.400	-53.9	4.6	-49.3	-30.0	-19.3	Peak	Horizontal
	1216.000	-45.1	4.3	-40.7	-30.0	-10.7	Peak	Vertical
	1823.800	-57.1	5.3	-51.8	-30.0	-21.8	Peak	Vertical
614.125	688.115	-100.5	37.0	-63.5	-54.0	-9.5	Peak	Horizontal
	720.209	-101.4	37.8	-63.7	-54.0	-9.7	Peak	Horizontal
	573.016	-95.1	33.2	-61.9	-54.0	-7.8	Peak	Vertical
	719.452	-100.7	36.7	-64.1	-54.0	-10.1	Peak	Vertical
	1228.600	-60.0	3.0	-57.1	-30.0	-27.1	Peak	Horizontal
	4210.000	-67.9	14.1	-53.8	-30.0	-23.8	Peak	Horizontal
	2364.400	-65.5	9.2	-56.3	-30.0	-26.3	Peak	Vertical
	5139.400	-69.3	17.5	-51.8	-30.0	-21.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	691.259	-100.6	37.0	-63.6	-54.0	-9.6	Peak	Horizontal
	724.515	-101.8	37.1	-64.7	-54.0	-10.7	Peak	Horizontal
	570.210	-95.8	33.1	-62.7	-54.0	-8.7	Peak	Vertical
	721.726	-100.3	36.5	-63.8	-54.0	-9.8	Peak	Vertical
	1354.000	-63.4	5.2	-58.2	-30.0	-28.2	Peak	Horizontal
	4138.000	-67.8	13.6	-54.2	-30.0	-24.2	Peak	Horizontal
	1356.400	-62.8	6.6	-56.2	-30.0	-26.2	Peak	Vertical
	4249.600	-68.1	15.2	-52.9	-30.0	-22.9	Peak	Vertical
657.000	224.194	-102.6	30.7	-71.9	-54.0	-17.9	Peak	Horizontal
	724.617	-102.5	37.4	-65.1	-54.0	-11.1	Peak	Horizontal
	97.997	-104.5	39.1	-65.3	-54.0	-11.3	Peak	Vertical
	558.941	-99.6	34.7	-65.0	-54.0	-11.0	Peak	Vertical
	1368.400	-63.0	5.6	-57.4	-30.0	-27.4	Peak	Horizontal
	4798.000	-68.2	15.5	-52.7	-30.0	-22.7	Peak	Horizontal
	1367.800	-64.6	6.5	-58.1	-30.0	-28.1	Peak	Vertical
	4466.200	-68.1	15.5	-52.6	-30.0	-22.6	Peak	Vertical
662.875	679.483	-99.9	36.5	-63.4	-54.0	-9.4	Peak	Horizontal
	714.424	-101.6	37.3	-64.3	-54.0	-10.3	Peak	Horizontal
	520.341	-95.4	31.9	-63.6	-54.0	-9.6	Peak	Vertical
	575.029	-95.9	33.4	-62.5	-54.0	-8.5	Peak	Vertical
	1289.200	-63.2	5.3	-58.0	-30.0	-28.0	Peak	Horizontal
	5366.200	-69.4	17.0	-52.5	-30.0	-22.5	Peak	Horizontal
	2419.600	-65.9	9.3	-56.6	-30.0	-26.6	Peak	Vertical
	4808.200	-67.2	16.3	-50.9	-30.0	-20.9	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-08-18 ~ 2024-08-31	Test Mode	Mode 3 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	697.590	-97.2	36.2	-61.0	-54.0	-7.0	Peak	Horizontal
	719.957	-97.7	37.7	-60.0	-54.0	-6.0	Peak	Horizontal
	594.090	-91.6	33.9	-57.7	-54.0	-3.7	Peak	Vertical
	618.103	-93.6	34.8	-58.8	-54.0	-4.8	Peak	Vertical
	1212.400	-42.8	3.7	-39.1	-30.0	-9.1	RMS	Horizontal
	1817.800	-49.9	4.6	-45.3	-30.0	-15.3	Peak	Horizontal
	1211.800	-44.6	5.0	-39.7	-30.0	-9.7	RMS	Vertical
	1818.400	-52.1	5.2	-46.9	-30.0	-16.9	Peak	Vertical
607.875	682.588	-97.8	37.1	-60.7	-54.0	-6.7	Peak	Horizontal
	719.957	-99.1	37.7	-61.4	-54.0	-7.4	Peak	Horizontal
	587.874	-97.9	33.6	-64.3	-54.0	-10.3	RMS	Vertical
	621.581	-98.3	34.9	-63.4	-54.0	-9.4	RMS	Vertical
	1216.000	-43.6	3.4	-40.2	-30.0	-10.2	RMS	Horizontal
	1823.800	-48.5	4.6	-43.8	-30.0	-13.8	Peak	Horizontal
	1216.000	-44.7	4.3	-40.4	-30.0	-10.4	RMS	Vertical
	1823.800	-50.0	5.3	-44.7	-30.0	-14.7	Peak	Vertical
614.125	675.682	-98.8	36.1	-62.6	-54.0	-8.6	Peak	Horizontal
	717.940	-101.9	37.7	-64.2	-54.0	-10.2	Peak	Horizontal
	529.173	-95.0	31.6	-63.4	-54.0	-9.4	Peak	Vertical
	574.424	-95.1	33.4	-61.7	-54.0	-7.7	Peak	Vertical
	1493.800	-63.5	5.2	-58.3	-30.0	-28.3	Peak	Horizontal
	3872.200	-68.3	14.1	-54.2	-30.0	-24.2	Peak	Horizontal
	2158.000	-67.4	8.7	-58.6	-30.0	-28.6	Peak	Vertical
	4144.000	-68.1	14.1	-54.1	-30.0	-24.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	580.296	-101.2	33.7	-67.5	-54.0	-13.5	Peak	Horizontal
	680.676	-99.3	36.9	-62.4	-54.0	-8.4	Peak	Horizontal
	486.973	-94.7	31.7	-63.0	-54.0	-9.0	Peak	Vertical
	576.644	-95.8	33.3	-62.5	-54.0	-8.5	Peak	Vertical
	2222.200	-65.9	8.6	-57.3	-30.0	-27.3	Peak	Horizontal
	5436.400	-69.0	17.0	-52.0	-30.0	-22.0	Peak	Horizontal
	2221.600	-65.8	9.2	-56.6	-30.0	-26.6	Peak	Vertical
	4392.400	-68.6	15.3	-53.4	-30.0	-23.4	Peak	Vertical
657.000	96.542	-103.4	39.2	-64.2	-54.0	-10.2	Peak	Horizontal
	549.241	-98.2	34.2	-64.0	-54.0	-10.0	Peak	Horizontal
	96.251	-104.4	39.3	-65.2	-54.0	-11.2	Peak	Vertical
	761.865	-103.0	37.9	-65.1	-54.0	-11.1	Peak	Vertical
	1371.400	-63.9	5.7	-58.2	-30.0	-28.2	Peak	Horizontal
	4178.200	-68.4	14.7	-53.7	-30.0	-23.7	Peak	Horizontal
	1358.200	-64.1	6.6	-57.5	-30.0	-27.5	Peak	Vertical
	4556.200	-67.4	15.4	-51.9	-30.0	-21.9	Peak	Vertical
662.875	687.151	-99.4	36.7	-62.7	-54.0	-8.7	Peak	Horizontal
	712.423	-99.7	36.9	-62.8	-54.0	-8.8	Peak	Horizontal
	482.047	-93.7	31.6	-62.1	-54.0	-8.1	Peak	Vertical
	619.405	-97.0	34.7	-62.3	-54.0	-8.3	Peak	Vertical
	2244.400	-65.3	8.3	-57.0	-30.0	-27.0	Peak	Horizontal
	4817.200	-68.2	16.1	-52.1	-30.0	-22.1	Peak	Horizontal
	2340.400	-65.4	9.1	-56.3	-30.0	-26.3	Peak	Vertical
	4815.400	-67.9	16.5	-51.4	-30.0	-21.4	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-08-20 ~ 2024-11-05	Test Mode	Mode 4 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350 + 606.700 + 607.050	110.025	-91.1	23.6	-67.5	-54.0	-13.5	Peak	Horizontal
	555.740	-97.3	34.3	-63.0	-54.0	-9.0	Peak	Horizontal
	110.025	-95.4	33.4	-62.0	-54.0	-8.0	Peak	Vertical
	480.080	-92.8	33.1	-59.7	-54.0	-5.7	Peak	Vertical
	1214.200	-57.5	5.8	-51.7	-30.0	-21.7	Peak	Horizontal
	2696.200	-66.3	8.5	-57.8	-30.0	-27.8	Peak	Horizontal
	1214.200	-55.3	6.1	-49.2	-30.0	-19.2	Peak	Vertical
	1889.800	-57.4	6.4	-51.0	-30.0	-21.0	Peak	Vertical
607.875 + 607.525 + 607.175 + 606.825	107.115	-89.7	24.4	-65.3	-54.0	-11.3	Peak	Horizontal
	563.306	-96.6	34.1	-62.5	-54.0	-8.5	Peak	Horizontal
	110.025	-94.4	33.4	-61.0	-54.0	-7.0	Peak	Vertical
	479.983	-92.1	33.0	-59.1	-54.0	-5.1	Peak	Vertical
	1213.600	-56.6	5.8	-50.8	-30.0	-20.8	Peak	Horizontal
	1822.600	-62.5	5.3	-57.2	-30.0	-27.2	Peak	Horizontal
	1213.600	-55.6	6.1	-49.5	-30.0	-19.5	Peak	Vertical
	1822.000	-63.2	6.2	-57.0	-30.0	-27.0	Peak	Vertical
614.125 + 614.475 + 614.825 + 615.175	565.100	-103.9	33.2	-70.7	-54.0	-16.7	Peak	Horizontal
	717.300	-103.6	37.9	-65.7	-54.0	-11.7	Peak	Horizontal
	571.100	-103.6	32.9	-70.7	-54.0	-16.7	Peak	Vertical
	718.900	-103.6	36.6	-67.0	-54.0	-13.0	Peak	Vertical
	1230.000	-57.1	3.0	-54.1	-30.0	-24.1	Peak	Horizontal
	2333.700	-65.5	8.9	-56.6	-30.0	-26.6	Peak	Horizontal
	1355.500	-62.7	6.5	-56.2	-30.0	-26.2	Peak	Vertical
	2819.600	-64.9	10.4	-54.5	-30.0	-24.5	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875 + 615.525 + 615.175 + 614.825	520.200	-102.6	32.7	-69.9	-54.0	-15.9	Peak	Horizontal
	718.800	-103.0	37.5	-65.5	-54.0	-11.5	Peak	Horizontal
	90.800	-94.6	31.0	-63.6	-54.0	-9.6	Peak	Vertical
	829.200	-103.3	37.8	-65.5	-54.0	-11.5	Peak	Vertical
	1229.300	-58.5	3.0	-55.5	-30.0	-25.5	Peak	Horizontal
	4316.100	-66.4	14.7	-51.7	-30.0	-21.7	Peak	Horizontal
	1229.300	-58.5	3.3	-55.2	-30.0	-25.2	Peak	Vertical
	2480.200	-64.2	9.0	-55.2	-30.0	-25.2	Peak	Vertical
657.000 + 657.350 + 657.700 + 658.050	105.757	-84.8	19.7	-65.1	-54.0	-11.1	Peak	Horizontal
	690.085	-101.4	36.7	-64.7	-54.0	-10.7	Peak	Horizontal
	94.214	-90.1	29.7	-60.4	-54.0	-6.4	Peak	Vertical
	620.051	-96.4	34.8	-61.6	-54.0	-7.6	Peak	Vertical
	2188.000	-66.0	8.3	-57.7	-30.0	-27.7	Peak	Horizontal
	5893.600	-68.6	18.3	-50.3	-30.0	-20.3	Peak	Horizontal
	1375.000	-64.1	6.3	-57.8	-30.0	-27.8	Peak	Vertical
	4807.600	-67.4	16.3	-51.1	-30.0	-21.1	Peak	Vertical
662.875 + 662.525 + 662.175 + 661.825	105.854	-84.3	19.7	-64.6	-54.0	-10.6	Peak	Horizontal
	718.215	-103.4	37.7	-65.7	-54.0	-11.7	Peak	Horizontal
	96.057	-92.9	29.9	-63.0	-54.0	-9.0	Peak	Vertical
	554.479	-95.7	32.1	-63.6	-54.0	-9.6	Peak	Vertical
	1616.800	-62.8	4.0	-58.8	-30.0	-28.8	Peak	Horizontal
	5099.200	-67.9	16.7	-51.2	-30.0	-21.2	Peak	Horizontal
	1292.800	-62.8	5.2	-57.6	-30.0	-27.6	Peak	Vertical
	4688.200	-67.5	16.5	-51.0	-30.0	-21.0	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-11-04 ~ 2024-11-11	Test Mode	Mode 5

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350	93.048	-92.5	23.7	-68.8	-54.0	-14.8	Peak	Horizontal
	532.897	-100.6	34.7	-65.9	-54.0	-11.9	QP	Horizontal
	96.233	-102.4	39.3	-63.1	-54.0	-9.1	QP	Vertical
	563.255	-96.9	34.7	-62.2	-54.0	-8.2	Peak	Vertical
	1212.400	-47.1	5.8	-41.3	-30.0	-11.3	Peak	Horizontal
	1817.800	-59.5	5.3	-54.2	-30.0	-24.2	Peak	Horizontal
	1213.000	-53.4	6.1	-47.3	-30.0	-17.3	Peak	Vertical
	1818.400	-61.7	6.3	-55.4	-30.0	-25.4	Peak	Vertical
607.875 + 607.525	109.928	-91.7	23.6	-68.1	-54.0	-14.1	Peak	Horizontal
	524.797	-94.5	34.9	-59.6	-54.0	-5.6	Peak	Horizontal
	95.960	-99.3	39.1	-60.2	-54.0	-6.2	QP	Vertical
	557.389	-96.0	34.6	-61.4	-54.0	-7.4	Peak	Vertical
	1214.800	-48.8	3.5	-45.3	-30.0	-15.3	Peak	Horizontal
	1822.600	-58.8	4.6	-54.2	-30.0	-24.2	Peak	Horizontal
	1214.800	-53.0	4.5	-48.5	-30.0	-18.5	Peak	Vertical
	2433.400	-64.1	9.2	-54.9	-30.0	-24.9	Peak	Vertical
614.125 + 614.475	107.115	-87.4	24.4	-63.0	-54.0	-9.0	Peak	Horizontal
	528.871	-94.1	34.5	-59.6	-54.0	-5.6	Peak	Horizontal
	95.960	-100.8	39.1	-61.7	-54.0	-7.7	QP	Vertical
	553.703	-96.1	34.2	-61.9	-54.0	-7.9	Peak	Vertical
	1228.600	-46.3	3.0	-43.3	-30.0	-13.3	Peak	Horizontal
	2440.000	-65.5	8.5	-57.0	-30.0	-27.0	Peak	Horizontal
	1228.600	-49.0	3.3	-45.7	-30.0	-15.7	Peak	Vertical
	2434.000	-64.1	9.2	-54.9	-30.0	-24.9	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875 + 615.525	109.928	-88.1	23.6	-64.5	-54.0	-10.5	Peak	Horizontal
	524.021	-94.1	34.9	-59.2	-54.0	-5.2	Peak	Horizontal
	95.995	-100.1	39.2	-60.9	-54.0	-6.9	QP	Vertical
	559.038	-97.2	34.7	-62.5	-54.0	-8.5	Peak	Vertical
	1231.000	-47.6	3.0	-44.6	-30.0	-14.6	Peak	Horizontal
	1846.600	-55.7	5.0	-50.7	-30.0	-20.7	Peak	Horizontal
	1231.000	-49.7	3.3	-46.4	-30.0	-16.4	Peak	Vertical
	2432.800	-63.9	9.2	-54.7	-30.0	-24.7	Peak	Vertical
657.000 + 657.350	107.018	-87.9	24.4	-63.5	-54.0	-9.5	Peak	Horizontal
	516.455	-93.2	34.4	-58.8	-54.0	-4.8	Peak	Horizontal
	95.542	-100.5	38.8	-61.7	-54.0	-7.7	QP	Vertical
	550.114	-96.5	34.4	-62.1	-54.0	-8.1	Peak	Vertical
	1314.400	-52.6	4.0	-48.6	-30.0	-18.6	Peak	Horizontal
	2435.200	-64.0	8.6	-55.4	-30.0	-25.4	Peak	Horizontal
	1314.400	-54.4	3.8	-50.6	-30.0	-20.6	Peak	Vertical
	2438.800	-65.1	9.1	-56.0	-30.0	-26.0	Peak	Vertical
662.875 + 665.525	109.928	-87.9	23.6	-64.3	-54.0	-10.3	Peak	Horizontal
	523.633	-93.7	34.9	-58.8	-54.0	-4.8	Peak	Horizontal
	93.147	-95.5	38.4	-57.1	-54.0	-3.1	Peak	Vertical
	93.147	-102.1	38.4	-63.7	-54.0	-9.7	QP	Vertical
	1325.200	-52.9	3.8	-49.1	-30.0	-19.1	Peak	Horizontal
	2432.800	-63.8	8.7	-55.1	-30.0	-25.1	Peak	Horizontal
	1325.200	-51.3	4.2	-47.1	-30.0	-17.1	Peak	Vertical
	2434.000	-65.6	9.2	-56.4	-30.0	-26.4	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-11-04 ~ 2024-11-18	Test Mode	Mode 6 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350	90.819	-90.3	23.3	-67.0	-54.0	-13.0	Peak	Horizontal
	513.545	-94.3	34.4	-59.9	-54.0	-5.9	Peak	Horizontal
	94.117	-99.6	39.0	-60.6	-54.0	-6.6	QP	Vertical
	479.983	-93.8	33.0	-60.8	-54.0	-6.8	Peak	Vertical
	1228.600	-65.3	3.0	-62.3	-30.0	-32.3	Peak	Horizontal
	3135.400	-68.5	9.8	-58.7	-30.0	-28.7	Peak	Horizontal
	3103.600	-69.1	8.6	-60.5	-30.0	-30.5	Peak	Vertical
	6646.600	-73.5	18.7	-54.8	-30.0	-24.8	Peak	Vertical
607.875 + 607.525	110.025	-94.1	23.6	-70.5	-54.0	-16.5	Peak	Horizontal
	524.118	-93.8	34.9	-58.9	-54.0	-4.9	Peak	Horizontal
	91.207	-95.0	36.4	-58.6	-54.0	-4.6	Peak	Vertical
	110.025	-91.8	33.4	-58.4	-54.0	-4.4	Peak	Vertical
	1289.200	-68.9	5.3	-63.6	-30.0	-33.6	Peak	Horizontal
	2440.000	-64.8	8.5	-56.3	-30.0	-26.3	Peak	Horizontal
	2434.000	-65.0	9.2	-55.8	-30.0	-25.8	Peak	Vertical
	4016.200	-70.8	14.5	-56.3	-30.0	-26.3	Peak	Vertical
614.125 + 614.475	90.819	-90.3	23.3	-67.0	-54.0	-13.0	Peak	Horizontal
	513.545	-94.3	34.4	-59.9	-54.0	-5.9	Peak	Horizontal
	94.117	-99.6	39.0	-60.6	-54.0	-6.6	QP	Vertical
	479.983	-93.8	33.0	-60.8	-54.0	-6.8	Peak	Vertical
	1228.600	-65.3	3.0	-62.3	-30.0	-32.3	Peak	Horizontal
	2437.600	-63.7	8.6	-55.1	-30.0	-25.1	Peak	Horizontal
	1368.400	-70.2	6.5	-63.7	-30.0	-33.7	Peak	Vertical
	2435.800	-63.7	9.1	-54.6	-30.0	-24.6	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875 + 615.525	94.214	-85.5	18.3	-67.2	-54.0	-13.2	Peak	Horizontal
	524.312	-97.6	32.5	-65.1	-54.0	-11.1	Peak	Horizontal
	96.542	-92.1	29.7	-62.4	-54.0	-8.4	Peak	Vertical
	591.824	-99.8	34.2	-65.6	-54.0	-11.6	Peak	Vertical
	2434.600	-67.9	8.7	-59.2	-30.0	-29.2	Peak	Horizontal
	3686.800	-69.3	12.7	-56.6	-30.0	-26.6	Peak	Horizontal
	2438.200	-65.3	9.1	-56.2	-30.0	-26.2	Peak	Vertical
	4477.600	-71.9	15.5	-56.4	-30.0	-26.4	Peak	Vertical
657.000 + 657.350	94.505	-86.5	18.2	-68.3	-54.0	-14.3	Peak	Horizontal
	522.469	-96.8	32.4	-64.4	-54.0	-10.4	Peak	Horizontal
	95.184	-92.0	29.9	-62.1	-54.0	-8.1	Peak	Vertical
	572.618	-100.0	33.2	-66.8	-54.0	-12.8	Peak	Vertical
	2436.400	-63.0	8.6	-54.4	-30.0	-24.4	Peak	Horizontal
	3994.000	-70.7	13.8	-56.9	-30.0	-26.9	Peak	Horizontal
	2432.800	-64.5	9.2	-55.3	-30.0	-25.3	Peak	Vertical
	5132.800	-71.1	17.5	-53.6	-30.0	-23.6	Peak	Vertical
662.875 + 665.525	95.281	-86.9	18.3	-68.6	-54.0	-14.6	Peak	Horizontal
	529.065	-96.2	32.3	-63.9	-54.0	-9.9	Peak	Horizontal
	95.960	-91.4	29.9	-61.5	-54.0	-7.5	Peak	Vertical
	580.281	-100.2	33.5	-66.7	-54.0	-12.7	Peak	Vertical
	2438.800	-64.8	8.5	-56.3	-30.0	-26.3	Peak	Horizontal
	5137.000	-70.8	16.6	-54.2	-30.0	-24.2	Peak	Horizontal
	2436.400	-65.3	9.1	-56.2	-30.0	-26.2	Peak	Vertical
	5425.000	-70.0	18.1	-51.9	-30.0	-21.9	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-11-04 ~ 2024-11-05	Test Mode	Mode 7 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275	110.025	-89.6	23.6	-66.0	-54.0	-12.0	Peak	Horizontal
	688.533	-100.9	36.4	-64.5	-54.0	-10.5	Peak	Horizontal
	106.727	-92.4	35.9	-56.5	-54.0	-2.5	Peak	Vertical
	110.025	-89.5	33.4	-56.1	-54.0	-2.1	Peak	Vertical
	1212.400	-58.7	5.8	-52.9	-30.0	-22.9	Peak	Horizontal
	1819.000	-54.2	5.3	-48.9	-30.0	-18.9	Peak	Horizontal
	1212.400	-53.8	6.1	-47.7	-30.0	-17.7	Peak	Vertical
	1818.400	-51.5	6.3	-45.2	-30.0	-15.2	Peak	Vertical
607.600	110.025	-90.9	23.6	-67.3	-54.0	-13.3	Peak	Horizontal
	717.051	-102.3	37.4	-64.9	-54.0	-10.9	Peak	Horizontal
	92.953	-100.2	38.3	-61.9	-54.0	-7.9	Peak	Vertical
	559.814	-95.6	34.6	-61.0	-54.0	-7.0	Peak	Vertical
	1215.400	-54.1	5.9	-48.2	-30.0	-18.2	Peak	Horizontal
	1823.200	-56.5	5.3	-51.2	-30.0	-21.2	Peak	Horizontal
	1214.800	-52.4	6.1	-46.3	-30.0	-16.3	Peak	Vertical
	1822.600	-51.4	6.2	-45.2	-30.0	-15.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000	101.974	-85.3	19.4	-65.9	-54.0	-11.9	Peak	Horizontal
	711.425	-103.5	37.0	-66.5	-54.0	-12.5	Peak	Horizontal
	90.819	-92.1	31.0	-61.1	-54.0	-7.1	Peak	Vertical
	556.807	-96.8	32.0	-64.8	-54.0	-10.8	Peak	Vertical
	2329.000	-66.2	9.0	-57.2	-30.0	-27.2	Peak	Horizontal
	5756.800	-69.7	17.3	-52.4	-30.0	-22.4	Peak	Horizontal
	1355.800	-64.5	6.5	-58.0	-30.0	-28.0	Peak	Vertical
	4835.200	-69.2	16.7	-52.5	-30.0	-22.5	Peak	Vertical
662.600	104.884	-83.4	19.5	-63.9	-54.0	-9.9	Peak	Horizontal
	725.296	-103.7	36.9	-66.8	-54.0	-12.8	Peak	Horizontal
	93.050	-90.7	30.0	-60.7	-54.0	-6.7	Peak	Vertical
	551.666	-97.9	32.1	-65.8	-54.0	-11.8	Peak	Vertical
	1359.400	-64.7	5.5	-59.2	-30.0	-29.2	Peak	Horizontal
	5495.800	-69.5	17.1	-52.4	-30.0	-22.4	Peak	Horizontal
	1274.200	-64.1	5.3	-58.8	-30.0	-28.8	Peak	Vertical
	4929.400	-69.7	16.8	-52.9	-30.0	-22.9	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB) Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB) Note 3: QP measurement was not performed when peak measure level was lower than the QP limit. RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-08-17 ~ 2024-08-23	Test Mode	Mode 8 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275	48.915	-103.9	31.5	-72.4	-54.0	-18.4	Peak	Horizontal
	710.261	-102.8	37.2	-65.6	-54.0	-11.6	Peak	Horizontal
	100.034	-104.8	37.8	-67.0	-54.0	-13.0	Peak	Vertical
	574.752	-99.9	35.3	-64.6	-54.0	-10.6	Peak	Vertical
	1212.400	-52.6	6.3	-46.3	-30.0	-16.3	Peak	Horizontal
	3625.600	-70.9	11.8	-59.1	-30.0	-29.1	Peak	Horizontal
	1212.400	-56.9	5.8	-51.1	-30.0	-21.1	Peak	Vertical
	2412.400	-69.6	9.8	-59.8	-30.0	-29.8	Peak	Vertical
607.600	50.079	-104.9	31.1	-73.8	-54.0	-19.8	Peak	Horizontal
	700.173	-103.6	37.2	-66.4	-54.0	-12.4	Peak	Horizontal
	99.161	-105.0	38.8	-66.2	-54.0	-12.2	Peak	Vertical
	495.115	-99.3	34.1	-65.2	-54.0	-11.2	Peak	Vertical
	1215.400	-52.2	6.2	-46.0	-30.0	-16.0	Peak	Horizontal
	2426.200	-70.0	10.2	-59.8	-30.0	-29.8	Peak	Horizontal
	1215.400	-57.8	5.6	-52.2	-30.0	-22.2	Peak	Vertical
	2414.800	-68.8	9.8	-59.0	-30.0	-29.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000	582.743	-104.1	33.8	-70.3	-54.0	-16.3	Peak	Horizontal
	716.682	-103.5	37.6	-65.9	-54.0	-11.9	Peak	Horizontal
	573.619	-99.5	33.3	-66.2	-54.0	-12.2	Peak	Vertical
	724.769	-100.6	36.2	-64.4	-54.0	-10.4	Peak	Vertical
	1313.915	-60.8	4.1	-56.7	-30.0	-26.7	Peak	Horizontal
	3584.135	-66.6	13.0	-53.6	-30.0	-23.6	Peak	Horizontal
	1313.659	-58.2	3.8	-54.4	-30.0	-24.4	Peak	Vertical
	4337.145	-67.3	14.9	-52.4	-30.0	-22.4	Peak	Vertical
662.600	719.452	-103.2	37.5	-65.7	-54.0	-11.7	Peak	Horizontal
	832.149	-104.2	37.4	-66.8	-54.0	-12.8	Peak	Horizontal
	569.611	-98.2	33.0	-65.2	-54.0	-11.2	Peak	Vertical
	748.007	-102.3	36.6	-65.7	-54.0	-11.7	Peak	Vertical
	1324.955	-59.4	3.7	-55.7	-30.0	-25.7	Peak	Horizontal
	4316.937	-66.2	14.6	-51.6	-30.0	-21.6	Peak	Horizontal
	1325.213	-57.0	4.2	-52.8	-30.0	-22.8	Peak	Vertical
	4695.522	-67.4	16.4	-51.0	-30.0	-21.0	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB) Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB) Note 3: QP measurement was not performed when peak measure level was lower than the QP limit. RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-08-17 ~ 2024-08-23	Test Mode	Mode 8 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275	47.945	-105.0	31.5	-73.5	-54.0	-19.5	Peak	Horizontal
	738.779	-103.4	37.7	-65.7	-54.0	-11.7	Peak	Horizontal
	93.147	-104.8	38.6	-66.2	-54.0	-12.2	Peak	Vertical
	555.158	-97.4	34.7	-62.7	-54.0	-8.7	Peak	Vertical
	1212.400	-52.2	6.3	-45.9	-30.0	-15.9	Peak	Horizontal
	4132.600	-71.1	13.1	-58.0	-30.0	-28.0	Peak	Horizontal
	1212.400	-58.7	5.8	-52.9	-30.0	-22.9	Peak	Vertical
	2426.200	-67.6	9.7	-57.9	-30.0	-27.9	Peak	Vertical
607.600	50.855	-104.3	30.8	-73.5	-54.0	-19.5	Peak	Horizontal
	741.495	-102.8	37.6	-65.2	-54.0	-11.2	Peak	Horizontal
	102.653	-104.6	38.3	-66.3	-54.0	-12.3	Peak	Vertical
	556.031	-97.6	34.6	-63.0	-54.0	-9.0	Peak	Vertical
	1215.400	-51.9	6.2	-45.7	-30.0	-15.7	Peak	Horizontal
	2293.600	-70.9	10.7	-60.2	-30.0	-30.2	Peak	Horizontal
	1214.800	-59.3	5.7	-53.6	-30.0	-23.6	Peak	Vertical
	1822.600	-64.9	7.8	-57.1	-30.0	-27.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000	714.424	-102.1	37.3	-64.8	-54.0	-10.8	Peak	Horizontal
	750.108	-101.9	36.4	-65.5	-54.0	-11.5	Peak	Horizontal
	569.611	-97.9	33.0	-64.9	-54.0	-10.9	Peak	Vertical
	688.357	-101.4	36.1	-65.3	-54.0	-11.3	Peak	Vertical
	1313.659	-54.3	4.1	-50.2	-30.0	-20.2	Peak	Horizontal
	2740.064	-64.4	9.0	-55.4	-30.0	-25.4	Peak	Horizontal
	1314.426	-58.5	3.8	-54.7	-30.0	-24.7	Peak	Vertical
	2412.634	-64.9	9.4	-55.5	-30.0	-25.5	Peak	Vertical
662.600	707.940	-101.8	36.8	-65.0	-54.0	-11.0	Peak	Horizontal
	746.435	-102.4	36.5	-65.9	-54.0	-11.9	Peak	Horizontal
	91.335	-98.1	31.3	-66.8	-54.0	-12.8	Peak	Vertical
	545.756	-97.2	32.2	-65.0	-54.0	-11.0	Peak	Vertical
	1325.471	-54.2	3.8	-50.4	-30.0	-20.4	Peak	Horizontal
	2839.949	-65.4	10.1	-55.3	-30.0	-25.3	Peak	Horizontal
	1325.213	-56.8	4.2	-52.6	-30.0	-22.6	Peak	Vertical
	3299.006	-66.1	11.9	-54.2	-30.0	-24.2	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB) Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB) Note 3: QP measurement was not performed when peak measure level was lower than the QP limit. RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-08-17 ~ 2024-08-23	Test Mode	Mode 8 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275	50.467	-104.0	30.9	-73.1	-54.0	-19.1	Peak	Horizontal
	712.007	-104.2	37.5	-66.7	-54.0	-12.7	Peak	Horizontal
	102.653	-103.9	38.3	-65.6	-54.0	-11.6	Peak	Vertical
	766.327	-103.8	38.2	-65.6	-54.0	-11.6	Peak	Vertical
	1213.000	-51.2	6.3	-44.9	-30.0	-14.9	Peak	Horizontal
	1818.400	-63.2	8.0	-55.2	-30.0	-25.2	Peak	Horizontal
	1213.000	-49.8	5.8	-44.0	-30.0	-14.0	Peak	Vertical
	1819.000	-66.1	7.7	-58.4	-30.0	-28.4	Peak	Vertical
607.600	50.079	-105.0	31.1	-73.9	-54.0	-19.9	Peak	Horizontal
	746.151	-102.4	37.2	-65.2	-54.0	-11.2	Peak	Horizontal
	97.997	-105.6	39.3	-66.3	-54.0	-12.3	Peak	Vertical
	757.403	-104.0	38.2	-65.8	-54.0	-11.8	Peak	Vertical
	1213.000	-47.1	6.3	-40.8	-30.0	-10.8	Peak	Horizontal
	2425.600	-64.3	10.2	-54.1	-30.0	-24.1	Peak	Horizontal
	1213.000	-51.5	5.8	-45.7	-30.0	-15.7	Peak	Vertical
	1820.200	-63.6	7.8	-55.8	-30.0	-25.8	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000	724.515	-101.9	37.1	-64.8	-54.0	-10.8	Peak	Horizontal
	859.131	-103.6	37.6	-66.0	-54.0	-12.0	Peak	Horizontal
	577.656	-96.5	33.4	-63.1	-54.0	-9.1	Peak	Vertical
	726.805	-100.7	36.0	-64.7	-54.0	-10.7	Peak	Vertical
	1313.659	-58.9	4.1	-54.8	-30.0	-24.8	Peak	Horizontal
	3531.519	-65.8	12.5	-53.3	-30.0	-23.3	Peak	Horizontal
	1313.659	-59.3	3.8	-55.5	-30.0	-25.5	Peak	Vertical
	3605.119	-66.7	13.5	-53.2	-30.0	-23.2	Peak	Vertical
662.600	636.134	-101.7	33.4	-68.3	-54.0	-14.3	Peak	Horizontal
	721.726	-102.0	37.4	-64.6	-54.0	-10.6	Peak	Horizontal
	568.812	-96.7	32.9	-63.8	-54.0	-9.8	Peak	Vertical
	832.149	-103.6	37.9	-65.7	-54.0	-11.7	Peak	Vertical
	1281.842	-63.0	5.4	-57.6	-30.0	-27.6	Peak	Horizontal
	3937.337	-67.4	13.9	-53.5	-30.0	-23.5	Peak	Horizontal
	2418.745	-64.8	9.3	-55.5	-30.0	-25.5	Peak	Vertical
	4311.061	-66.9	15.1	-51.8	-30.0	-21.8	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB) Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB) Note 3: QP measurement was not performed when peak measure level was lower than the QP limit. RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-08-17 ~ 2024-08-23	Test Mode	Mode 8 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275	51.922	-104.9	30.7	-74.2	-54.0	-20.2	Peak	Horizontal
	734.802	-104.0	37.8	-66.2	-54.0	-12.2	Peak	Horizontal
	97.124	-105.5	39.1	-66.4	-54.0	-12.4	Peak	Vertical
	767.685	-103.0	38.1	-64.9	-54.0	-10.9	Peak	Vertical
	1212.400	-49.7	6.3	-43.4	-30.0	-13.4	Peak	Horizontal
	1819.000	-64.0	8.1	-55.9	-30.0	-25.9	Peak	Horizontal
	1212.400	-51.7	5.8	-45.9	-30.0	-15.9	Peak	Vertical
	1819.000	-63.8	7.7	-56.1	-30.0	-26.1	Peak	Vertical
607.600	49.788	-105.2	31.3	-73.9	-54.0	-19.9	Peak	Horizontal
	716.954	-103.5	37.8	-65.7	-54.0	-11.7	Peak	Horizontal
	98.191	-105.9	39.3	-66.6	-54.0	-12.6	Peak	Vertical
	675.535	-103.3	36.4	-66.9	-54.0	-12.9	Peak	Vertical
	1213.000	-49.4	6.3	-43.1	-30.0	-13.1	Peak	Horizontal
	1820.200	-61.5	8.1	-53.4	-30.0	-23.4	Peak	Horizontal
	1213.000	-52.4	5.8	-46.6	-30.0	-16.6	Peak	Vertical
	1820.200	-66.1	7.8	-58.3	-30.0	-28.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000	546.523	-100.8	32.4	-68.4	-54.0	-14.4	Peak	Horizontal
	694.905	-98.9	36.4	-62.5	-54.0	-8.5	Peak	Horizontal
	526.212	-95.3	31.3	-64.0	-54.0	-10.0	Peak	Vertical
	615.292	-96.8	34.3	-62.5	-54.0	-8.5	Peak	Vertical
	1314.426	-52.9	4.0	-48.9	-30.0	-18.9	Peak	Horizontal
	3594.612	-67.3	13.0	-54.3	-30.0	-24.3	Peak	Horizontal
	1314.171	-54.8	3.8	-51.0	-30.0	-21.0	Peak	Vertical
	3610.736	-66.4	13.5	-52.9	-30.0	-22.9	Peak	Vertical
662.600	693.687	-100.8	36.5	-64.3	-54.0	-10.3	Peak	Horizontal
	720.462	-102.6	37.6	-65.0	-54.0	-11.0	Peak	Horizontal
	569.611	-96.6	33.0	-63.6	-54.0	-9.6	Peak	Vertical
	617.453	-97.5	34.8	-62.7	-54.0	-8.7	Peak	Vertical
	1325.471	-47.6	3.8	-43.8	-30.0	-13.8	Peak	Horizontal
	3667.385	-66.5	13.3	-53.2	-30.0	-23.2	Peak	Horizontal
	1325.213	-52.0	4.2	-47.8	-30.0	-17.8	Peak	Vertical
	2589.721	-63.9	9.0	-54.9	-30.0	-24.9	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB) Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB) Note 3: QP measurement was not performed when peak measure level was lower than the QP limit. RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2024-11-04 ~ 2024-11-18	Test Mode	Mode 9 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275	92.177	-92.4	23.6	-68.8	-54.0	-14.8	Peak	Horizontal
	527.513	-94.7	34.8	-59.9	-54.0	-5.9	Peak	Horizontal
	102.168	-104.5	38.3	-66.2	-54.0	-12.1	Peak	Vertical
	479.983	-93.4	33.0	-60.4	-54.0	-6.4	Peak	Vertical
	1212.400	-54.9	5.8	-49.1	-30.0	-19.1	Peak	Horizontal
	1819.000	-65.3	5.3	-60.0	-30.0	-30.0	Peak	Horizontal
	1212.400	-58.8	6.1	-52.7	-30.0	-22.8	Peak	Vertical
	1819.600	-60.8	6.3	-54.5	-30.0	-24.5	Peak	Vertical
607.600	105.757	-89.4	19.7	-69.7	-54.0	-15.7	Peak	Horizontal
	575.625	-96.8	33.6	-63.2	-54.0	-9.2	Peak	Horizontal
	94.505	-92.2	29.7	-62.5	-54.0	-8.5	Peak	Vertical
	581.542	-100.8	33.5	-67.3	-54.0	-13.3	Peak	Vertical
	1215.400	-54.8	3.5	-51.3	-30.0	-21.3	Peak	Horizontal
	2435.200	-64.5	8.6	-55.9	-30.0	-25.9	Peak	Horizontal
	1214.800	-55.4	4.5	-50.9	-30.0	-20.9	Peak	Vertical
	2433.400	-67.4	9.2	-58.2	-30.0	-28.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
657.000	95.087	-87.0	18.2	-68.8	-54.0	-14.8	Peak	Horizontal
	574.267	-98.0	33.7	-64.3	-54.0	-10.3	Peak	Horizontal
	96.057	-89.2	29.9	-59.3	-54.0	-5.3	Peak	Vertical
	576.789	-100.4	33.3	-67.1	-54.0	-13.1	Peak	Vertical
	1313.800	-54.6	4.1	-50.5	-30.0	-20.5	Peak	Horizontal
	1970.800	-57.5	6.1	-51.4	-30.0	-21.4	Peak	Horizontal
	1314.400	-57.6	3.8	-53.8	-30.0	-23.8	Peak	Vertical
	1970.800	-51.2	5.8	-45.4	-30.0	-15.4	Peak	Vertical
662.600	92.953	-84.8	18.4	-66.4	-54.0	-12.4	Peak	Horizontal
	517.522	-96.5	32.7	-63.8	-54.0	-9.8	Peak	Horizontal
	95.184	-91.5	29.9	-61.6	-54.0	-7.6	Peak	Vertical
	592.794	-100.1	34.2	-65.9	-54.0	-11.9	Peak	Vertical
	1325.200	-55.4	3.8	-51.6	-30.0	-21.6	Peak	Horizontal
	2434.000	-62.0	8.7	-53.3	-30.0	-23.3	Peak	Horizontal
	1324.600	-54.5	4.1	-50.4	-30.0	-20.4	Peak	Vertical
	1987.600	-59.0	6.3	-52.7	-30.0	-22.7	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB) Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB) Note 3: QP measurement was not performed when peak measure level was lower than the QP limit. RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-09-04 ~ 2024-09-18	Test Mode	Mode 10 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	562.443	-102.1	31.6	-70.5	-54.0	-16.5	Peak	Horizontal
	653.315	-102.5	33.3	-69.2	-54.0	-15.2	Peak	Horizontal
	95.987	-105.5	37.6	-67.9	-54.0	-13.9	Peak	Vertical
	562.443	-96.3	31.8	-64.5	-54.0	-10.5	Peak	Vertical
	1211.800	-43.1	4.6	-38.5	-30.0	-8.5	Peak	Horizontal
	1817.800	-54.9	5.5	-49.4	-30.0	-19.4	Peak	Horizontal
	1211.800	-48.8	3.8	-45.0	-30.0	-15.0	Peak	Vertical
	1817.800	-60.2	4.9	-55.3	-30.0	-25.3	Peak	Vertical
607.875	207.358	-104.8	30.3	-74.5	-54.0	-20.5	Peak	Horizontal
	666.951	-103.1	33.8	-69.3	-54.0	-15.3	Peak	Horizontal
	95.987	-105.8	37.6	-68.2	-54.0	-14.2	Peak	Vertical
	573.336	-97.1	32.4	-64.7	-54.0	-10.7	Peak	Vertical
	1216.000	-44.1	4.2	-39.9	-30.0	-9.9	Peak	Horizontal
	1823.800	-54.4	5.4	-49.0	-30.0	-19.0	Peak	Horizontal
	1216.000	-47.0	3.7	-43.3	-30.0	-13.3	Peak	Vertical
	1823.200	-59.3	5.0	-54.3	-30.0	-24.3	Peak	Vertical
614.125	110.025	-90.2	23.6	-66.6	-54.0	-12.6	Peak	Horizontal
	717.245	-102.1	37.5	-64.6	-54.0	-10.6	Peak	Horizontal
	93.147	-102.2	38.4	-63.8	-54.0	-9.8	Peak	Vertical
	730.922	-101.8	36.6	-65.2	-54.0	-11.2	Peak	Vertical
	1228.000	-49.5	6.1	-43.4	-30.0	-13.4	Peak	Horizontal
	4606.000	-64.7	13.4	-51.3	-30.0	-21.3	Peak	Horizontal
	1228.600	-55.0	6.1	-48.9	-30.0	-18.9	Peak	Vertical
	1900.000	-59.1	6.4	-52.7	-30.0	-22.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	110.025	-88.9	23.6	-65.3	-54.0	-11.3	Peak	Horizontal
	706.866	-102.6	36.8	-65.8	-54.0	-11.8	Peak	Horizontal
	110.025	-96.0	33.4	-62.6	-54.0	-8.6	Peak	Vertical
	725.975	-101.2	36.4	-64.8	-54.0	-10.8	Peak	Vertical
	1231.600	-49.5	6.2	-43.3	-30.0	-13.3	Peak	Horizontal
	4142.800	-67.9	12.2	-55.7	-30.0	-25.7	Peak	Horizontal
	1232.200	-54.4	6.1	-48.3	-30.0	-18.3	Peak	Vertical
	1847.200	-63.1	5.9	-57.2	-30.0	-27.2	Peak	Vertical
657.000	110.025	-88.5	23.6	-64.9	-54.0	-10.9	Peak	Horizontal
	718.021	-102.4	37.4	-65.0	-54.0	-11.0	Peak	Horizontal
	92.080	-98.8	37.4	-61.4	-54.0	-7.4	Peak	Vertical
	558.844	-98.5	34.7	-63.8	-54.0	-9.8	Peak	Vertical
	1313.800	-57.8	6.3	-51.5	-30.0	-21.5	Peak	Horizontal
	4058.200	-67.5	11.4	-56.1	-30.0	-26.1	Peak	Horizontal
	1313.800	-53.7	6.5	-47.2	-30.0	-17.2	Peak	Vertical
	1970.800	-60.9	6.4	-54.5	-30.0	-24.5	Peak	Vertical
662.875	110.025	-88.3	23.6	-64.7	-54.0	-10.7	Peak	Horizontal
	725.975	-101.4	37.1	-64.3	-54.0	-10.3	Peak	Horizontal
	110.025	-94.4	33.4	-61.0	-54.0	-7.0	Peak	Vertical
	569.999	-98.6	34.5	-64.1	-54.0	-10.1	Peak	Vertical
	1325.800	-54.6	6.8	-47.8	-30.0	-17.8	Peak	Horizontal
	3385.000	-66.8	9.9	-56.9	-30.0	-26.9	Peak	Horizontal
	1325.800	-54.2	6.4	-47.8	-30.0	-17.8	Peak	Vertical
	1988.200	-63.2	6.5	-56.7	-30.0	-26.7	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-09-04 ~ 2024-09-18	Test Mode	Mode 10 Port B

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	184.202	-104.7	30.8	-73.9	-54.0	-19.9	Peak	Horizontal
	659.854	-102.1	33.6	-68.5	-54.0	-14.5	Peak	Horizontal
	96.022	-104.7	37.6	-67.1	-54.0	-13.1	Peak	Vertical
	589.203	-94.9	33.2	-61.7	-54.0	-7.7	Peak	Vertical
	1211.800	-42.3	4.6	-37.7	-30.0	-7.7	Peak	Horizontal
	1818.400	-55.3	5.5	-49.8	-30.0	-19.8	Peak	Horizontal
	1211.800	-48.1	3.8	-44.3	-30.0	-14.3	Peak	Vertical
	1818.400	-56.4	4.9	-51.5	-30.0	-21.5	Peak	Vertical
607.875	651.389	-100.6	33.2	-67.4	-54.0	-13.4	Peak	Horizontal
	712.740	-101.9	34.3	-67.6	-54.0	-13.6	Peak	Horizontal
	95.987	-105.2	37.6	-67.6	-54.0	-13.6	Peak	Vertical
	589.203	-96.3	33.2	-63.1	-54.0	-9.1	Peak	Vertical
	1216.000	-43.1	4.2	-38.9	-30.0	-8.9	Peak	Horizontal
	1823.200	-56.8	5.4	-51.4	-30.0	-21.4	Peak	Horizontal
	1216.000	-47.4	3.7	-43.7	-30.0	-13.7	Peak	Vertical
	1823.800	-55.2	5.0	-50.2	-30.0	-20.2	Peak	Vertical
614.125	110.025	-88.6	23.6	-65.0	-54.0	-11.0	Peak	Horizontal
	703.374	-102.6	36.8	-65.8	-54.0	-11.8	Peak	Horizontal
	110.025	-93.8	33.4	-60.4	-54.0	-6.4	Peak	Vertical
	615.201	-76.4	35.5	-40.9	-54.0	13.1	Peak	Vertical
	1228.000	-47.1	6.1	-41.0	-30.0	-11.0	Peak	Horizontal
	1842.400	-61.4	5.3	-56.1	-30.0	-26.1	Peak	Horizontal
	1228.000	-51.9	6.1	-45.8	-30.0	-15.8	Peak	Vertical
	1842.400	-58.2	5.9	-52.3	-30.0	-22.3	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	110.025	-88.6	23.6	-65.0	-54.0	-11.0	Peak	Horizontal
	736.354	-102.2	37.4	-64.8	-54.0	-10.8	Peak	Horizontal
	110.025	-99.2	33.4	-65.8	-54.0	-11.8	Peak	Vertical
	563.500	-97.4	34.6	-62.8	-54.0	-8.8	Peak	Vertical
	1231.600	-47.5	6.2	-41.3	-30.0	-11.3	Peak	Horizontal
	1901.800	-59.9	5.3	-54.6	-30.0	-24.6	Peak	Horizontal
	1232.200	-50.8	6.1	-44.7	-30.0	-14.7	Peak	Vertical
	1847.800	-59.6	5.9	-53.7	-30.0	-23.7	Peak	Vertical
657.000	110.025	-89.4	23.6	-65.8	-54.0	-11.8	Peak	Horizontal
	717.439	-102.0	37.5	-64.5	-54.0	-10.5	Peak	Horizontal
	92.953	-99.7	38.3	-61.4	-54.0	-7.4	Peak	Vertical
	558.262	-97.5	34.7	-62.8	-54.0	-8.8	Peak	Vertical
	1313.800	-50.8	6.3	-44.5	-30.0	-14.5	Peak	Horizontal
	4139.200	-69.1	12.3	-56.8	-30.0	-26.8	Peak	Horizontal
	1314.400	-54.5	6.5	-48.0	-30.0	-18.0	Peak	Vertical
	3141.400	-66.6	8.6	-58.0	-30.0	-28.0	Peak	Vertical
662.875	110.025	-90.0	23.6	-66.4	-54.0	-12.4	Peak	Horizontal
	692.995	-101.2	36.9	-64.3	-54.0	-10.3	Peak	Horizontal
	93.050	-100.6	38.4	-62.2	-54.0	-8.2	Peak	Vertical
	549.144	-96.8	34.2	-62.6	-54.0	-8.6	Peak	Vertical
	1325.800	-53.2	6.8	-46.4	-30.0	-16.4	Peak	Horizontal
	3085.000	-65.6	9.5	-56.1	-30.0	-26.1	Peak	Horizontal
	1325.800	-54.5	6.4	-48.1	-30.0	-18.1	Peak	Vertical
	1988.800	-63.0	6.5	-56.5	-30.0	-26.5	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-09-04 ~ 2024-09-18	Test Mode	Mode 10 Port C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	191.336	-103.7	30.8	-72.9	-54.0	-18.9	Peak	Horizontal
	686.420	-102.7	34.2	-68.5	-54.0	-14.5	Peak	Horizontal
	95.987	-105.6	37.6	-68.0	-54.0	-14.0	Peak	Vertical
	555.433	-96.2	31.8	-64.4	-54.0	-10.4	Peak	Vertical
	1212.400	-42.6	4.5	-38.1	-30.0	-8.1	Peak	Horizontal
	1818.400	-58.5	5.5	-53.0	-30.0	-23.0	Peak	Horizontal
	1211.800	-42.2	3.8	-38.4	-30.0	-8.4	Peak	Vertical
	1817.800	-55.6	4.9	-50.7	-30.0	-20.7	Peak	Vertical
607.875	562.443	-102.5	31.6	-70.9	-54.0	-16.9	Peak	Horizontal
	671.890	-102.1	34.0	-68.1	-54.0	-14.1	Peak	Horizontal
	95.987	-104.9	37.6	-67.3	-54.0	-13.3	Peak	Vertical
	591.380	-95.5	33.2	-62.3	-54.0	-8.3	Peak	Vertical
	1215.400	-41.8	4.2	-37.6	-30.0	-7.6	Peak	Horizontal
	1823.800	-58.5	5.4	-53.1	-30.0	-23.1	Peak	Horizontal
	1215.400	-43.9	3.7	-40.2	-30.0	-10.2	Peak	Vertical
	1823.800	-56.0	5.0	-51.0	-30.0	-21.0	Peak	Vertical
614.125	110.025	-87.8	23.6	-64.2	-54.0	-10.2	Peak	Horizontal
	706.284	-101.3	36.8	-64.5	-54.0	-10.5	Peak	Horizontal
	93.438	-99.3	38.6	-60.7	-54.0	-6.7	Peak	Vertical
	580.863	-96.7	35.2	-61.5	-54.0	-7.5	Peak	Vertical
	1228.000	-47.9	6.1	-41.8	-30.0	-11.8	Peak	Horizontal
	1842.400	-59.8	5.3	-54.5	-30.0	-24.5	Peak	Horizontal
	1228.000	-48.6	6.1	-42.5	-30.0	-12.5	Peak	Vertical
	1842.400	-58.9	5.9	-53.0	-30.0	-23.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	110.025	-87.2	23.6	-63.6	-54.0	-9.6	Peak	Horizontal
	744.308	-101.5	37.1	-64.4	-54.0	-10.4	Peak	Horizontal
	110.025	-93.5	33.4	-60.1	-54.0	-6.1	Peak	Vertical
	575.431	-97.4	35.0	-62.4	-54.0	-8.4	Peak	Vertical
	1231.600	-47.3	6.2	-41.1	-30.0	-11.1	Peak	Horizontal
	1847.200	-59.3	5.2	-54.1	-30.0	-24.1	Peak	Horizontal
	1231.600	-48.1	6.1	-42.0	-30.0	-12.0	Peak	Vertical
	1847.800	-58.6	5.9	-52.7	-30.0	-22.7	Peak	Vertical
657.000	110.025	-88.6	23.6	-65.0	-54.0	-11.0	Peak	Horizontal
	768.170	-101.5	36.6	-64.9	-54.0	-10.9	Peak	Horizontal
	110.025	-94.9	33.4	-61.5	-54.0	-7.5	Peak	Vertical
	564.179	-96.4	34.4	-62.0	-54.0	-8.0	Peak	Vertical
	1314.400	-58.0	6.3	-51.7	-30.0	-21.7	Peak	Horizontal
	1737.400	-56.2	5.2	-51.0	-30.0	-21.0	Peak	Horizontal
	1313.800	-53.2	6.5	-46.7	-30.0	-16.7	Peak	Vertical
	2443.000	-60.4	6.5	-53.9	-30.0	-23.9	Peak	Vertical
662.875	110.025	-88.5	23.6	-64.9	-54.0	-10.9	Peak	Horizontal
	741.495	-101.6	37.2	-64.4	-54.0	-10.4	Peak	Horizontal
	110.025	-95.0	33.4	-61.6	-54.0	-7.6	Peak	Vertical
	557.874	-96.7	34.7	-62.0	-54.0	-8.0	Peak	Vertical
	1325.800	-58.1	6.8	-51.3	-30.0	-21.3	Peak	Horizontal
	3142.600	-66.2	9.8	-56.4	-30.0	-26.4	Peak	Horizontal
	1325.800	-56.0	6.4	-49.6	-30.0	-19.6	Peak	Vertical
	1988.800	-58.7	6.5	-52.2	-30.0	-22.2	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-09-04 ~ 2024-09-18	Test Mode	Mode 10 Port D

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	186.872	-104.3	31.0	-73.3	-54.0	-19.3	Peak	Horizontal
	701.006	-102.1	34.1	-68.0	-54.0	-14.0	Peak	Horizontal
	95.987	-104.7	37.6	-67.1	-54.0	-13.1	Peak	Vertical
	591.162	-96.0	33.2	-62.8	-54.0	-8.8	Peak	Vertical
	1211.993	-44.4	4.5	-39.9	-30.0	-9.9	RMS	Horizontal
	1817.800	-51.5	5.5	-46.0	-30.0	-16.0	Peak	Horizontal
	1212.022	-46.4	3.8	-42.6	-30.0	-12.6	RMS	Vertical
	1817.800	-51.3	4.9	-46.4	-30.0	-16.4	Peak	Vertical
607.875	175.189	-100.0	27.9	-72.1	-54.0	-18.1	Peak	Horizontal
	694.827	-101.1	34.1	-67.0	-54.0	-13.0	Peak	Horizontal
	92.136	-100.7	36.7	-64.0	-54.0	-10.0	Peak	Vertical
	589.203	-94.9	33.2	-61.7	-54.0	-7.7	Peak	Vertical
	1215.085	-45.7	4.3	-41.4	-30.0	-11.4	RMS	Horizontal
	1823.200	-54.6	5.4	-49.2	-30.0	-19.2	Peak	Horizontal
	1216.000	-42.1	3.7	-38.4	-30.0	-8.4	Peak	Vertical
	1823.800	-50.9	5.0	-45.9	-30.0	-15.9	Peak	Vertical
614.125	110.025	-90.4	23.6	-66.8	-54.0	-12.8	Peak	Horizontal
	689.212	-99.9	36.3	-63.6	-54.0	-9.6	Peak	Horizontal
	110.025	-95.9	33.4	-62.5	-54.0	-8.5	Peak	Vertical
	528.483	-95.9	33.7	-62.2	-54.0	-8.2	Peak	Vertical
	1228.000	-47.0	6.1	-40.9	-30.0	-10.9	Peak	Horizontal
	1842.400	-54.5	5.3	-49.2	-30.0	-19.2	Peak	Horizontal
	1228.000	-45.5	6.1	-39.4	-30.0	-9.4	Peak	Vertical
	1842.400	-54.0	5.9	-48.1	-30.0	-18.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875	110.025	-90.4	23.6	-66.8	-54.0	-12.8	Peak	Horizontal
	711.231	-101.5	37.2	-64.3	-54.0	-10.3	Peak	Horizontal
	110.025	-95.3	33.4	-61.9	-54.0	-7.9	Peak	Vertical
	526.058	-95.6	33.5	-62.1	-54.0	-8.1	Peak	Vertical
	1231.600	-48.7	6.2	-42.5	-30.0	-12.5	Peak	Horizontal
	1847.800	-55.0	5.2	-49.8	-30.0	-19.8	Peak	Horizontal
	1231.600	-44.5	6.1	-38.4	-30.0	-8.4	Peak	Vertical
	1847.800	-54.6	5.9	-48.7	-30.0	-18.7	Peak	Vertical
657.000	110.025	-90.1	23.6	-66.5	-54.0	-12.5	Peak	Horizontal
	528.386	-101.3	34.6	-66.7	-54.0	-12.7	Peak	Horizontal
	110.025	-95.2	33.4	-61.8	-54.0	-7.8	Peak	Vertical
	527.513	-94.8	33.8	-61.0	-54.0	-7.0	Peak	Vertical
	1313.800	-50.0	6.3	-43.7	-30.0	-13.7	Peak	Horizontal
	3659.200	-68.6	10.9	-57.7	-30.0	-27.7	Peak	Horizontal
	1313.800	-46.9	6.5	-40.4	-30.0	-10.4	Peak	Vertical
	5074.000	-70.0	12.8	-57.2	-30.0	-27.2	Peak	Vertical
662.875	110.025	-90.4	23.6	-66.8	-54.0	-12.8	Peak	Horizontal
	743.338	-101.0	37.1	-63.9	-54.0	-9.9	Peak	Horizontal
	110.025	-95.8	33.4	-62.4	-54.0	-8.4	Peak	Vertical
	526.834	-94.6	33.7	-60.9	-54.0	-6.9	Peak	Vertical
	1325.800	-49.3	6.8	-42.5	-30.0	-12.5	Peak	Horizontal
	3142.600	-66.8	9.8	-57.0	-30.0	-27.0	Peak	Horizontal
	1325.800	-48.0	6.4	-41.6	-30.0	-11.6	Peak	Vertical
	1988.800	-62.6	6.5	-56.1	-30.0	-26.1	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-09-04 ~ 2024-09-18	Test Mode	Mode 11 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350 + 606.700 + 607.050	183.524	-103.5	30.6	-72.9	-54.0	-18.9	Peak	Horizontal
	692.013	-102.8	34.2	-68.6	-54.0	-14.6	Peak	Horizontal
	93.540	-105.0	37.5	-67.5	-54.0	-13.5	Peak	Vertical
	551.350	-95.9	31.7	-64.2	-54.0	-10.2	Peak	Vertical
	1324.000	-56.7	3.0	-53.7	-30.0	-23.7	Peak	Horizontal
	6440.800	-64.6	16.3	-48.3	-30.0	-18.3	Peak	Horizontal
	1324.000	-59.9	3.8	-56.1	-30.0	-26.1	Peak	Vertical
	6358.000	-63.8	15.6	-48.2	-30.0	-18.2	Peak	Vertical
607.875 + 607.525 + 607.175 + 606.825	184.202	-103.5	30.8	-72.7	-54.0	-18.7	Peak	Horizontal
	683.893	-102.6	34.3	-68.3	-54.0	-14.3	Peak	Horizontal
	92.170	-102.2	36.7	-65.5	-54.0	-11.5	Peak	Vertical
	539.878	-96.1	31.4	-64.7	-54.0	-10.7	Peak	Vertical
	2411.200	-59.2	7.1	-52.1	-30.0	-22.1	Peak	Horizontal
	6500.200	-63.5	15.9	-47.6	-30.0	-17.6	Peak	Horizontal
	1307.800	-59.5	4.3	-55.2	-30.0	-25.2	Peak	Vertical
	1921.600	-59.3	5.3	-54.0	-30.0	-24.0	Peak	Vertical
614.125 + 614.475 + 614.825 + 615.175	107.115	-91.0	24.4	-66.6	-54.0	-12.6	Peak	Horizontal
	549.726	-99.7	34.5	-65.2	-54.0	-11.2	Peak	Horizontal
	107.115	-97.3	35.8	-61.5	-54.0	-7.5	Peak	Vertical
	479.983	-94.5	33.0	-61.5	-54.0	-7.5	Peak	Vertical
	1229.800	-59.9	6.2	-53.7	-30.0	-23.7	Peak	Horizontal
	1843.000	-63.9	5.3	-58.6	-30.0	-28.6	Peak	Horizontal
	1229.200	-62.5	6.1	-56.4	-30.0	-26.4	Peak	Vertical
	1844.200	-64.6	5.9	-58.7	-30.0	-28.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
615.875 + 615.525 + 615.175 + 614.825	107.115	-91.5	24.4	-67.1	-54.0	-13.1	Peak	Horizontal
	546.428	-100.3	34.6	-65.7	-54.0	-11.7	Peak	Horizontal
	110.025	-95.6	33.4	-62.2	-54.0	-8.2	Peak	Vertical
	557.001	-96.3	34.5	-61.8	-54.0	-7.8	Peak	Vertical
	1230.400	-61.0	6.2	-54.8	-30.0	-24.8	Peak	Horizontal
	1846.600	-64.3	5.2	-59.1	-30.0	-29.1	Peak	Horizontal
	1229.800	-60.9	6.1	-54.8	-30.0	-24.8	Peak	Vertical
	1845.400	-62.0	5.9	-56.1	-30.0	-26.1	Peak	Vertical
657.000 + 657.350 + 657.700 + 658.050	110.025	-91.3	23.6	-67.7	-54.0	-13.7	Peak	Horizontal
	554.770	-99.4	34.5	-64.9	-54.0	-10.9	Peak	Horizontal
	107.115	-97.7	35.8	-61.9	-54.0	-7.9	Peak	Vertical
	555.740	-95.7	34.4	-61.3	-54.0	-7.3	Peak	Vertical
	1315.600	-65.0	6.3	-58.7	-30.0	-28.7	Peak	Horizontal
	2517.400	-61.1	7.6	-53.5	-30.0	-23.5	Peak	Horizontal
	1315.600	-62.6	6.5	-56.1	-30.0	-26.1	Peak	Vertical
	1972.000	-63.8	6.4	-57.4	-30.0	-27.4	Peak	Vertical
662.875 + 662.525 + 662.175 + 661.825	110.025	-91.3	23.6	-67.7	-54.0	-13.7	Peak	Horizontal
	479.983	-96.7	33.3	-63.4	-54.0	-9.4	Peak	Horizontal
	110.025	-95.0	33.4	-61.6	-54.0	-7.6	Peak	Vertical
	479.983	-92.4	33.0	-59.4	-54.0	-5.4	Peak	Vertical
	1324.000	-64.7	6.7	-58.0	-30.0	-28.0	Peak	Horizontal
	3166.000	-66.6	9.6	-57.0	-30.0	-27.0	Peak	Horizontal
	1323.400	-61.3	6.4	-54.9	-30.0	-24.9	Peak	Vertical
	1987.600	-64.2	6.5	-57.7	-30.0	-27.7	Peak	Vertical
Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)								
Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)								
Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.								
RMS measurement was not performed when peak measure level was lower than the RMS limit.								

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-11-11 ~ 2024-11-14	Test Mode	Mode 15 Port A

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275 + 607.275	106.727	-87.6	19.7	-67.9	-54.0	-13.9	Peak	Horizontal
	547.398	-90.6	32.4	-58.2	-54.0	-4.2	Peak	Horizontal
	91.207	-94.3	31.3	-63.0	-54.0	-9.0	Peak	Vertical
	479.983	-93.1	31.4	-61.7	-54.0	-7.7	Peak	Vertical
	1215.400	-55.0	3.5	-51.5	-30.0	-21.5	Peak	Horizontal
	5429.800	-67.3	16.9	-50.4	-30.0	-20.4	Peak	Horizontal
	1215.400	-60.7	4.4	-56.3	-30.0	-26.3	Peak	Vertical
	5072.200	-69.0	17.4	-51.6	-30.0	-21.6	Peak	Vertical
607.600 + 606.600	104.981	-88.7	19.5	-69.2	-54.0	-15.2	Peak	Horizontal
	514.612	-91.4	32.3	-59.1	-54.0	-5.1	Peak	Horizontal
	106.727	-93.2	30.0	-63.2	-54.0	-9.2	Peak	Vertical
	479.983	-92.3	31.4	-60.9	-54.0	-6.9	Peak	Vertical
	1213.600	-57.5	3.6	-53.9	-30.0	-23.9	Peak	Horizontal
	5490.400	-69.8	17.2	-52.6	-30.0	-22.6	Peak	Horizontal
	1214.200	-57.8	4.6	-53.2	-30.0	-23.2	Peak	Vertical
	4975.600	-69.3	16.8	-52.5	-30.0	-22.5	Peak	Vertical
657.000 + 658.000	93.050	-85.9	18.4	-67.5	-54.0	-13.5	Peak	Horizontal
	552.539	-91.4	32.7	-58.7	-54.0	-4.7	Peak	Horizontal
	106.630	-94.1	30.0	-64.1	-54.0	-10.1	Peak	Vertical
	479.983	-94.3	31.4	-62.9	-54.0	-8.9	Peak	Vertical
	1243.000	-61.5	3.5	-58.0	-30.0	-28.0	Peak	Horizontal
	4990.000	-68.2	16.1	-52.1	-30.0	-22.1	Peak	Horizontal
	2149.000	-64.3	8.6	-55.7	-30.0	-25.7	Peak	Vertical
	5517.400	-69.5	18.1	-51.4	-30.0	-21.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
662.600 + 661.600	106.630	-87.3	19.7	-67.6	-54.0	-13.6	Peak	Horizontal
	552.636	-91.0	32.6	-58.4	-54.0	-4.4	Peak	Horizontal
	91.401	-95.4	31.2	-64.2	-54.0	-10.2	Peak	Vertical
	479.983	-92.4	31.4	-61.0	-54.0	-7.0	Peak	Vertical
	2360.200	-65.5	8.7	-56.8	-30.0	-26.8	Peak	Horizontal
	4587.400	-68.6	15.6	-53.0	-30.0	-23.0	Peak	Horizontal
	1367.800	-64.2	6.5	-57.7	-30.0	-27.7	Peak	Vertical
	4680.400	-68.7	16.5	-52.2	-30.0	-22.2	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14 ~ 2024-11-15	Test Mode	Mode 1 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350 + 606.700 + 607.000	96.057	-83.70	18.80	-64.90	-54.00	-10.90	Peak	Horizontal
	717.633	-99.20	37.80	-61.40	-54.00	-7.40	Peak	Horizontal
	110.025	-96.70	29.60	-67.10	-54.00	-13.10	Peak	Vertical
	566.022	-93.50	32.80	-60.70	-54.00	-6.70	Peak	Vertical
	1213.600	-55.80	3.60	-52.20	-30.00	-22.20	Peak	Horizontal
	5336.800	-69.80	17.10	-52.70	-30.00	-22.70	Peak	Horizontal
	1214.200	-56.00	4.60	-51.40	-30.00	-21.40	Peak	Vertical
	3888.400	-68.80	14.20	-54.60	-30.00	-24.60	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-11-14 ~ 2024-11-15	Test Mode	Mode 1 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350 + 606.700 + 607.000	506.464	-91.2	34.3	-56.9	-54.0	-2.9	Peak	Horizontal
	688.242	-94.7	36.5	-58.2	-54.0	-4.2	Peak	Horizontal
	105.854	-94.6	36.6	-58.0	-54.0	-4.0	Peak	Vertical
	566.119	-93.1	34.5	-58.6	-54.0	-4.6	Peak	Vertical
	1213.600	-56.3	5.8	-50.5	-30.0	-20.5	Peak	Horizontal
	2463.400	-62.7	7.9	-54.8	-30.0	-24.8	Peak	Horizontal
	1213.600	-61.4	6.1	-55.3	-30.0	-25.3	Peak	Vertical
	2459.200	-56.8	6.7	-50.1	-30.0	-20.1	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14 ~ 2024-11-15	Test Mode	Mode 3 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350 + 606.700 + 607.000	96.057	-86.30	18.80	-67.50	-54.00	-13.50	Peak	Horizontal
	647.890	-97.40	34.70	-62.70	-54.00	-8.70	Peak	Horizontal
	110.025	-96.10	29.60	-66.50	-54.00	-12.50	Peak	Vertical
	570.678	-95.20	33.00	-62.20	-54.00	-8.20	Peak	Vertical
	1213.000	-42.00	3.70	-38.30	-30.00	-8.30	Peak	Horizontal
	1821.400	-56.60	4.60	-52.00	-30.00	-22.00	Peak	Horizontal
	1214.200	-39.60	4.60	-35.00	-30.00	-5.00	Peak	Vertical
	1821.400	-47.60	5.30	-42.30	-30.00	-12.30	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-09-13 ~ 2024-11-28	Test Mode	Mode 3 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000	110.025	-89.4	25.7	-63.7	-54.0	-9.7	Peak	Horizontal
	554.479	-94.7	36.8	-57.9	-54.0	-3.9	Peak	Horizontal
606.350	110.025	-91.8	35.6	-56.2	-54.0	-2.2	Peak	Vertical
	544.488	-94.3	36.2	-58.1	-54.0	-4.1	Peak	Vertical
606.700	1213.600	-56.4	5.8	-50.6	-30.0	-20.6	Peak	Horizontal
	2459.800	-61.5	8.0	-53.5	-30.0	-23.5	Peak	Horizontal
607.000	1213.600	-61.2	6.1	-55.1	-30.0	-25.1	Peak	Vertical
	2458.600	-57.7	6.7	-51.0	-30.0	-21.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14 ~ 2024-11-15	Test Mode	Mode 7 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.270	94.214	-84.3	18.3	-66.0	-54.0	-12.0	Peak	Horizontal
	722.968	-102.8	37.2	-65.6	-54.0	-11.6	Peak	Horizontal
	105.854	-95.7	29.9	-65.8	-54.0	-11.8	Peak	Vertical
	526.834	-97.3	31.5	-65.8	-54.0	-11.8	Peak	Vertical
	1212.400	-52.2	3.7	-48.5	-30.0	-18.5	Peak	Horizontal
	3608.200	-66.9	12.9	-54.0	-30.0	-24.0	Peak	Horizontal
	1212.400	-50.7	4.9	-45.8	-30.0	-15.8	Peak	Vertical
	5430.400	-69.6	18.2	-51.4	-30.0	-21.4	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-11-14 ~ 2024-11-27	Test Mode	Mode 8 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275 + 606.625 + 606.975 + 607.325	500.741	-92.6	34.3	-58.3	-54.0	-4.3	Peak	Horizontal
	662.634	-96.1	35.7	-60.4	-54.0	-6.4	Peak	Horizontal
	99.161	-98.2	38.7	-59.5	-54.0	-5.5	Peak	Vertical
	545.652	-94.8	34.0	-60.8	-54.0	-6.8	Peak	Vertical
	1212.400	-50.8	1.6	-49.2	-30.0	-19.2	Peak	Horizontal
	3367.000	-65.8	9.8	-56.0	-30.0	-26.0	Peak	Horizontal
	1214.200	-51.3	2.4	-48.9	-30.0	-18.9	Peak	Vertical
	5281.600	-69.3	15.6	-53.7	-30.0	-23.7	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-14 ~ 2024-11-27	Test Mode	Mode 10 with AD8C

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.000 + 606.350 + 606.700 + 607.000	94.214	-85.90	18.30	-67.60	-54.00	-13.60	Peak	Horizontal
	670.491	-99.00	35.40	-63.60	-54.00	-9.60	Peak	Horizontal
	105.854	-94.20	29.90	-64.30	-54.00	-10.30	Peak	Vertical
	566.313	-94.70	32.80	-61.90	-54.00	-7.90	Peak	Vertical
	1213.600	-42.20	3.60	-38.60	-30.00	-8.60	Peak	Horizontal
	1821.400	-59.10	4.60	-54.50	-30.00	-24.50	Peak	Horizontal
	1213.600	-40.00	4.70	-35.30	-30.00	-5.30	Peak	Vertical
	1818.400	-50.80	5.20	-45.60	-30.00	-15.60	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)

Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

Test Site	WZ-AC1	Test Engineer	Bob Zhang
Test Date	2024-11-27 ~ 2024-11-28	Test Mode	Mode 10 Multi Ports

Test Channel (MHz)	Frequency (MHz)	Reading Level (dBm)	Substitution Factor (dB)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Polarization
606.275 + 606.625 + 606.975 + 607.325	482.214	-90.9	33.2	-57.7	-54.0	-3.7	Peak	Horizontal
	549.338	-92.4	34.5	-57.9	-54.0	-3.9	Peak	Horizontal
	98.870	-97.1	38.8	-58.3	-54.0	-4.3	Peak	Vertical
	554.285	-95.1	34.2	-60.9	-54.0	-6.9	Peak	Vertical
	1214.200	-51.7	1.4	-50.3	-30.0	-20.3	Peak	Horizontal
	1821.400	-63.5	2.5	-61.0	-30.0	-31.0	Peak	Horizontal
	1214.200	-54.9	2.4	-52.5	-30.0	-22.5	Peak	Vertical
	3517.600	-67.6	10.6	-57.0	-30.0	-27.0	Peak	Vertical

Note 1: Measure Level (dBm) = Reading Level (dBm) + Substitution Factor (dB)


Note 2: Substitution Factor (dB) = Cable Loss (dB) + Space Attenuation (dB) - Antenna Gain (dBi) - 2.15 (dB)

Note 3: QP measurement was not performed when peak measure level was lower than the QP limit.

RMS measurement was not performed when peak measure level was lower than the RMS limit.

A.6 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2024-08-25
Test Engineer	Linda Wei	Temp./Humidity	23.8°C/57.1%
Factor	ENV216_101683_L1_Filter Off_C	Polarity	Line
EUT	Wireless Quad Transmitter	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by Analog FM at 606MHz		

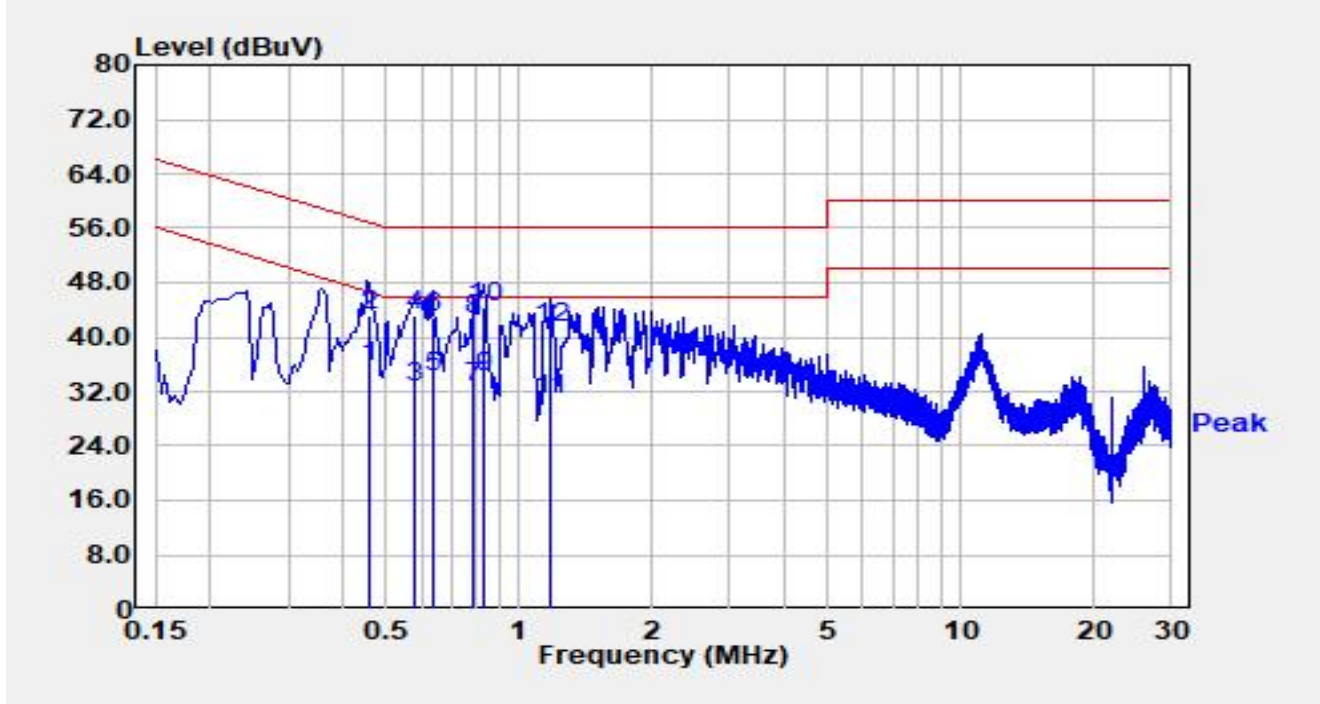


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1	*	0.458	25.80	9.91	35.71	-11.02	46.73	Average
2		0.458	33.40	9.91	43.31	-13.42	56.73	QP
3		0.582	22.70	9.95	32.65	-13.35	46.00	Average
4		0.582	33.20	9.95	43.15	-12.85	56.00	QP
5		0.641	24.00	9.97	33.97	-12.03	46.00	Average
6		0.641	32.80	9.97	42.77	-13.23	56.00	QP
7		0.786	22.50	10.03	32.53	-13.47	46.00	Average
8		0.786	32.50	10.03	42.53	-13.47	56.00	QP
9		0.831	24.00	10.05	34.05	-11.95	46.00	Average
10		0.831	34.40	10.05	44.45	-11.55	56.00	QP
11		1.170	20.80	10.12	30.92	-15.08	46.00	Average
12		1.170	31.10	10.12	41.22	-14.78	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{Cable Loss } (dB)$.
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB)$.

Site	WZ-SR2	Test Date	2024-08-25
Test Engineer	Linda Wei	Temp./Humidity	23.8°C/57.1%
Factor	ENV216_101683_N_Filter Off_C	Polarity	Neutral
EUT	Wireless Quad Transmitter	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by Analog FM at 606MHz		

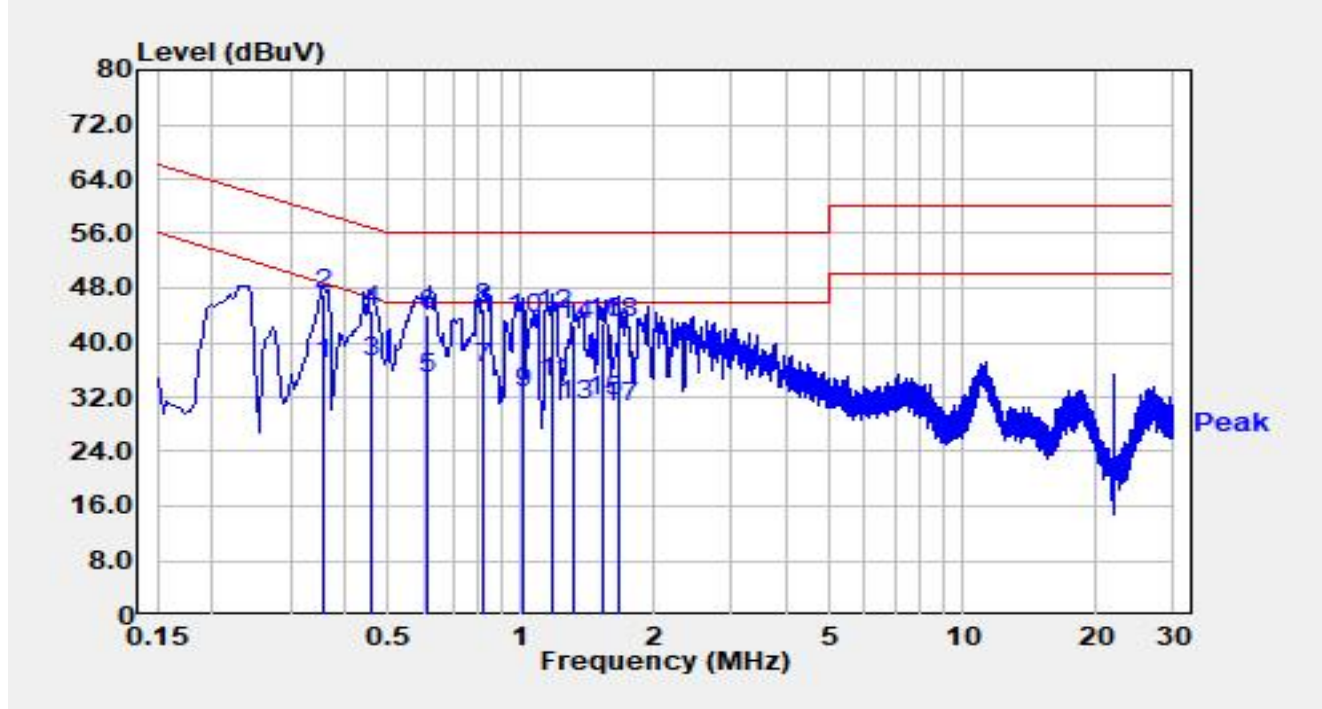

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.358	26.60	10.12	36.72	-12.05	48.77	Average
2		0.358	36.90	10.12	47.02	-11.75	58.77	QP
3	*	0.457	26.90	10.15	37.05	-9.69	46.75	Average
4		0.457	34.50	10.15	44.65	-12.09	56.75	QP
5		0.615	24.50	10.22	34.72	-11.28	46.00	Average
6		0.615	34.00	10.22	44.22	-11.78	56.00	QP
7		0.823	25.80	10.30	36.10	-9.90	46.00	Average
8		0.823	34.70	10.30	45.00	-11.00	56.00	QP
9		1.010	22.10	10.38	32.48	-13.52	46.00	Average
10		1.010	33.20	10.38	43.58	-12.42	56.00	QP
11		1.180	23.60	10.38	33.98	-12.02	46.00	Average
12		1.180	33.60	10.38	43.98	-12.02	56.00	QP
13		1.310	20.50	10.38	30.88	-15.12	46.00	Average
14		1.310	32.30	10.38	42.68	-13.32	56.00	QP
15		1.540	20.90	10.38	31.28	-14.72	46.00	Average

16		1.540	32.40	10.38	42.78	-13.22	56.00	QP
17		1.660	20.10	10.39	30.49	-15.52	46.00	Average
18		1.660	32.40	10.39	42.79	-13.22	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to “2406RSU021-UT” file.

Appendix C - EUT Photograph

Refer to “2406RSU021-UE” file.