




# 5" High Definition Pan & Tilt Monitor

LF915HD  
LF915-2HD

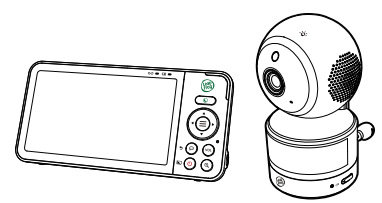

**Parent Guide**  
This guide contains important information. Please keep it for future reference.

**Need help?**  
Visit [leapfrog.com/support](http://leapfrog.com/support)

## Key Features

- Color and B&W Automatic Night Vision**  
Thanks to the latest starlight sensor and noise suppression technology, you can check in on your baby 24/7 with the finest clarity. Night vision is no longer just black-and-white, you can choose to see your baby in color at night!
- Humidity and Temperature Sensor**  
Rest assured of the environment your baby is in with the built-in real-time temperature and humidity sensor. It lets you know when the room is outside a comfortable temperature and humidity range.
- Lullabies and Soothing Sounds**  
Comforting and engaging your baby can be done easily and from a distance. Choose from 5 lullabies and 5 soothing sounds to help lull your baby back to sleep.

- Night Light**  
Need some additional lighting near your baby for those bedtime stories? The built-in night light on the baby monitor can help with that. You can control the night light directly on the Baby Unit, or remotely from the Parent Viewer.
- Pan, Tilt, and Zoom**  
Watch your curious little ones closely as they wiggle and move around in bed. Get a 360-degree panoramic view, see as many as 80 degrees up and down, and zoom up to 8x to spot more details with ease.
- Motion and Sound Sensor**  
With adjustable alerts on noise or motion detected from the baby monitor, give yourself a peace of mind with an extra set of eyes.

Technical Specifications	
Frequency control	Crystal controlled PLL synthesizer
Transmit frequency	Baby Unit: 2406-2475MHz Parent Viewer: 2406-2475MHz
Channels	24
LCD	5" Color LCD (IPS 1280x720 pixels)
Nominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
Power requirements	Parent Viewer: 3.7V 5000mAh Lithium-ion battery Baby Unit power adapter: Output: 5V DC @ 1.5A Parent Viewer power adapter: Output: 5V DC @ 2A

Credits: The Background Noise sound file was created by Caroline Ford, and is used under the Creative Commons license. The Stream Noise sound file was created by Caroline Ford, and is used under the Creative Commons license. The Crickets At Night sound file was created by Mike Koenig, and is used under the Creative Commons license. The Heart Beat sound file was created by Zarabadeu, and is used under the Creative Commons license.



Read our complete warranty policy online at [leapfrog.com/warranty](http://leapfrog.com/warranty)




Visit our website for more information about our products, downloads, resources and more. [leapfrog.com](http://leapfrog.com)

## Important Safety Instructions

- The applied nameplate is located at the bottom of the Baby Unit's base. When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:
- Follow all warnings and instructions marked on the product.
  - Adult setup is required.
  - CAUTION:** Do not install the Baby Unit at a height above 2 meters.
  - This product is not a substitute for adult supervision of the infant. Supervising the infant is the parent's or caregiver's responsibility. This product could cease operating, and therefore you should not assume it will continue working properly for any given period of time. Further, this is not a medical device and should not be used as such. This product is intended to assist you in supervising your baby.
  - Do not use this product near water. For example, do not use it next to a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
  - CAUTION:** Use only the battery provided. There may be a risk of explosion if a wrong type of battery is used for the Parent Viewer. The battery cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of battery into fire or a hot oven, or mechanically crushing or cutting or the battery can result in an explosion. Leaving the battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid or gas. Battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used battery according to the information in **The RBRC seal**.
  - Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product.
    - Power adapter information: Baby Unit output: Output: 5V DC 1.5A; VTech Telecommunications Ltd.; Model: VT07EUS05150  
Parent Viewer output: Output: 5V DC 2A; VTech Telecommunications Ltd.; Model: VT07EUS05200
    - Rechargeable battery information: Zuhait Great Power Energy Co., Ltd.; Lithium battery, 3.7V 5000mAh; Model: GSP806090-5Ah-3.7V-15IP

## Get Started

- ### 1. Connect the Baby Monitor
- Notes:**
- The rechargeable battery in the Parent Viewer is built-in.
  - Use only the power adapters supplied with this product.
  - Make sure the Parent Viewer and the Baby Unit are not connected to the switch controlled electric outlets.
  - Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of the Parent Viewer and the Baby Unit, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
  - Make sure the Parent Viewer, the Baby Unit and the power adapter cords are out of reach of children.
  - To maintain compliance with the FCC's RF exposure guidelines, place the Baby Unit at least 20cm from nearby persons.

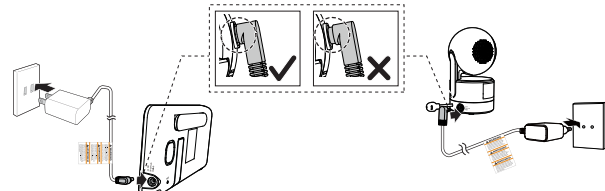

## Charge the Parent Viewer battery before use


When you connect and turn on the Parent Viewer, the battery charges automatically.

- Notes:**
- Before using the baby monitor for the first time, charge the Parent Viewer battery for 12 hours. When the Parent Viewer battery is fully charged, the battery icon becomes solid.
  - It takes longer to charge the battery when the Parent Viewer is turned on. To shorten the charging time, turn the Parent Viewer off while charging.
  - The standby time varies depending on the Baby Unit sensitivity levels you set, your actual usage time and the age of the battery.

The battery icon on the screen indicates the battery status (see the following table).


Battery Indicators	Battery Status	Action
The screen displays  The light flashes.	The battery has very little power left and may only be used for a short time.	Charge without interruption (about 30 minutes).
The battery icon becomes solid	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.

## Overview - Parent Viewer

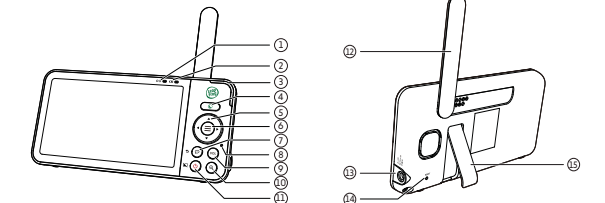

- Link LED light
  - On when the Parent Viewer is linked to the Baby Unit.
  - Flashes when the link to the Baby Unit is lost.
- Battery LED light
  - Night Mode quick set key
    - Select black-and-white or color night vision viewing mode.
    - Adjust night light brightness.
- VOL Volume
  - Press to view the volume adjustment bar.
- Arrow Keys
- Menu / Select
- Talk / Return
  - Press and hold to talk to the Baby Unit.
  - While in a submenu, press to exit.
- Zoom
  - Force reboot the Parent Viewer.
- Stand
- Zoom
  - Force reboot the Parent Viewer.
- Power / LCD Off
- Microphone
- Antenna
- Power jack
- RESET
  - Force reboot the Parent Viewer.
- Stand


## Overview - Baby Unit

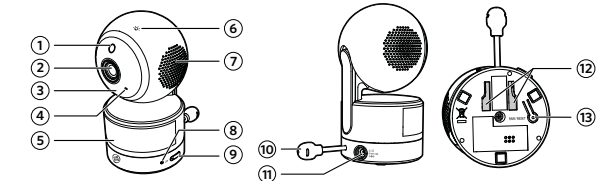

- Light sensor
- Camera
- Infrared LEDs
- Microphone
- Night light
- Night light control key
  - Press to turn the night light on or off.
  - Press and hold to adjust night light brightness.
- Speaker
- POWER LED Light
- On / Off switch
- Temperature sensor
  - Position the sensor horizontally for optimal usage.
- Power jack
- Wall mount holes
- PAIR / Reset key
  - The Parent Viewer and Baby Unit(s) provided are already paired.

## Basic Operation - Parent Viewer

- ### Adjust Parent Viewer's speaker volume
- Press **VOL** to open the volume adjustment bar.
  - Press to increase the speaker volume and to decrease the speaker volume.

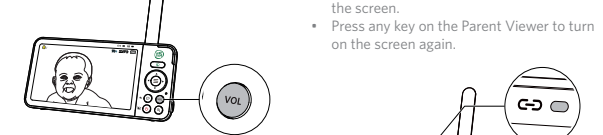

- ### Turn on/off the Parent Viewer screen
- You can turn on or off the Parent Viewer screen without powering off the Parent Viewer. You will still be able to hear sounds from the Baby Unit.
- Press on the Parent Viewer to turn off the screen.
  - Press any key on the Parent Viewer to turn on the screen again.

- ### Talk to your baby via the Baby Unit
- Press and hold the key.
  - When the icon displays on the screen, speak to your Parent Viewer. Your voice is transmitted to the Baby Unit.
  - When finished talking, release the key and hear your baby again.

- ### Use the menu
- Press to enter the menu, choose a menu item, or save a setting. You can use the Parent Viewer for advanced settings or operations, such as to play or stop the Baby Unit's lullaby, or to adjust the Baby Unit sound sensitivity. While in the menu:
- Press or to scroll among the menu options.
  - Press to select an item, or to save a setting.
  - Press to return to the live video.
  - Press to go to the **Help & Info** page.

- ### Zoom
- Press to zoom in or out. The zoom sequence is then .


capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

## SAVE THESE INSTRUCTIONS

- Cautions**
- Use and store the product at a temperature between 32°F and 104°F.
  - Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source. Batteries should not be exposed to excessive heat such as bright sunshine or fire.
  - Warning—Strangulation Hazard—Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9m) away). Do not remove this tag.
  - Never place the Baby Unit(s) inside the baby's crib or playpen. Never cover the Baby Unit(s) or Parent Viewer with anything such as a towel or a blanket.
  - Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless telephones.

- Precautions for users of implanted cardiac pacemakers**  
Cardiac pacemakers (applies only to digital cordless devices):  
Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:
- Pacemaker patients**
- Should keep wireless devices at least six inches from the pacemaker.
  - Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON. WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices.
- Electromagnetic fields (EMF)**  
This LeapFrog product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.


## What's Included

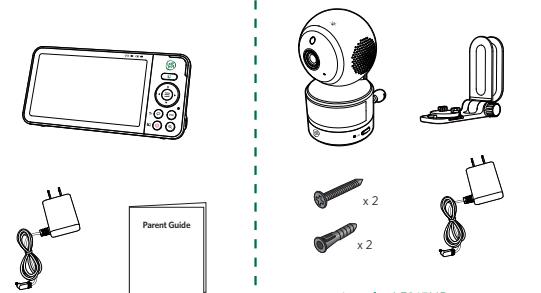

1 set for LF915HD  
2 sets for LF915-2HD

## 2. Power On or Off the Baby Monitor

- Slide the On/Off switch to **ON** to power on your Baby Unit.
- After the Parent Viewer is fully charged, press and hold until the welcome screen appears.

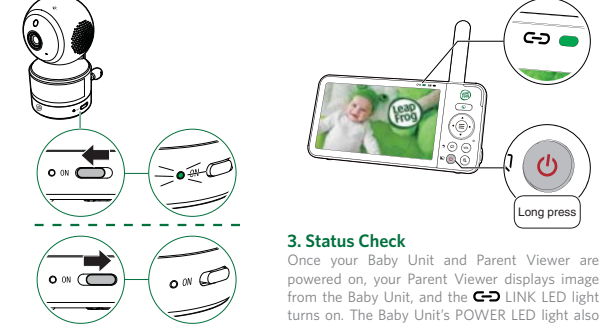


### 3. Status Check

Once your Baby Unit and Parent Viewer are powered on, your Parent Viewer displays image from the Baby Unit, and the LINK LED light turns on. The Baby Unit's POWER LED light also turns on.

## 4. Positioning the Baby Monitor

- Place the Baby Unit at least 3ft (1m) away from other electronic devices.
- Place the Baby Unit at least 3ft (1m) away from wireless routers, microwaves, cell phones and computers.

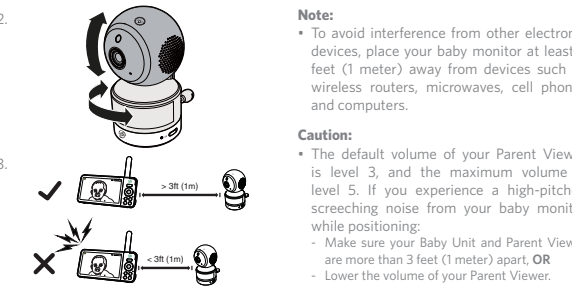

**Caution:** The default volume of your Parent Viewer is level 3, and the maximum volume is level 5. If you experience a high-pitched screaming noise from your baby monitor while positioning:  
- Make sure your Baby Unit and Parent Viewer are more than 3 feet (1 meter) apart, **OR**  
- Lower the volume of your Parent Viewer.

## Parent Unit Icons

**Tip:** Do your icons look a little different? Your baby monitor has undergone a recent software update. Go to our online manual for an overview of the latest icons (See [Online Help](#)).

### Main Menu Icons

- Monitoring mode (For LF915-2HD only)**
- Baby unit 1 in Single mode
  - Baby unit 2 in Single mode
  - Split mode
  - Patrol mode

### Night light

- Turn On/Off night light.
- Select Auto Brightness mode (or)
- Adjust the fixed level night light brightness.

### Lullaby

- Stop melody playing.
- Play all melodies.
- View all Songs and play one of the five melodies and five soothing sounds.
- Lullaby Timer
  - Set a timer to stop playing melodies after 15, 30, or 60 minutes, or let them play non-stop.

### Detection

- Sound**
    - Select sound Sensitivity level.
    - Turn on/off Sound Detection Alert.
    - Turn on/off Auto Wake Up function.
- (See **Sound Detection** and **Auto Wake Up** sections to learn more)

### Detection (continued)

- Motion**
- Turn on/off Motion Alert.
  - Select motion Sensitivity level.
- (See **Motion Detection** section to learn more)
- Temperature**
- Turn on/off Temperature Alert. When you turn it on, the parent unit beeps whenever the room temperature detected by the baby unit falls outside the set temperature range.
  - Select the Minimum temperature of the temperature alert range.
  - Select Maximum temperature of the temperature alert range.
  - Select temperature Format. Change the temperature display format to Fahrenheit (°F) or Celsius (°C).

### LCD settings

- Adjust parent unit screen Brightness.
  - Turn on/off Dim Mode.
- (See **Dim Mode** section to learn more)

### Camera settings

- Turn on/off Status LED indicator. When you turn it on, the POWER LED light on the baby unit to turn on/off or flash to indicate the camera's conditions.
- Adjust the baby unit's speaker Volume.

### General settings


- Turn on/off Low Battery Alert Tone. When you turn it on, the parent unit beeps when the battery is low.
- Turn on/off No Link Alert Tone. When you turn it on, the parent unit beeps when the link between the parent unit and the baby unit is lost.
- Add Baby Unit
- Remove Baby Unit

## Status Bar Icons


- Current view status**
- The Baby Unit number that is being viewed when in:
    - Single Baby Unit mode.
    - Patrol mode (\* For LF915-2HD or pairing with LF920-0HD)
    - Split mode (\* For LF915-2HD or pairing with LF920-0HD)
    - Patrol mode (\* For LF915-2HD or pairing with LF920-0HD)
  - Black and white night vision is activated.
  - Color night vision is activated.
  - Motion detection and alert is turned on.
  - Sound detection and alert is turned on.
  - Melodies or soothing sounds are playing.
  - Night light is turned on and the automatic brightness setting is turned off.
  - Night light is turned on and the automatic brightness setting is turned on.
  - Parent Viewer speaker is muted.
  - Temperature alert is turned on.
  - Humidity is lower than 30%.
  - Humidity is within 30-60%.
  - Humidity is higher than 60%.
  - Temperature is lower than 68°F.
  - Temperature is between 68-75°F.
  - Temperature is higher than 75°F.
  - Battery level indicator


## Parent Viewer Icons (continued)


### Alert Icons

-  Displays when Parent Viewer's battery is low and needs charging.



-  Displays when motion is detected by Baby Unit.

-  Displays when sound is detected by Baby Unit.

-  Displays when the temperature detected by Baby Unit exceeds the set maximum.

-  Displays when the temperature detected by Baby Unit is lower than the set minimum.

## Night Vision (B&W and Color)

The Baby Unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the Baby Unit being viewed detects low light levels, the infrared LEDs switch on automatically. When Black and White Night Vision mode is activated,  appears on the screen. When Color Night Vision mode is activated,  appears on the screen.

### Notes

- It is normal to see a short white glare on your Parent Viewer screen as the Baby Unit is adapting to the dark environment.
- If you adjust the night vision mode while night vision is activated, the new settings will be saved and applied the next time it activates.

### Tip




- The video quality may vary depending on the surrounding environment and interfering factors like lightings, objects, colors and backgrounds. Adjust the Baby Unit's angle or place the Baby Unit at a higher elevation to prevent glare and blurry displays.

## Sound Detection and Auto Wake Up

### Adjust Sound Detection Sensitivity

You can turn on **Sound Detection Alert** and adjust the Baby Unit's **Sound Sensitivity** to only detect your desired level of sounds. When the Baby Unit detects sounds that exceed the chosen level, the Parent Viewer screen turns on if it has been switched off or dimmed, and the Baby Unit transmits the detected sounds to the Parent Viewer. You will immediately be able to see and hear your baby.

If you have turned on **Sound Detection Alert**, the Parent Viewer beeps when the Baby Unit detects sounds.

Sound Sensitivity Level	Level 3 (Highest)	Level 2 (Medium)	Level 1 (Lowest)
			
Description	The Parent Viewer screen and speaker turn on for very small sounds, including background noises from your baby's room.	The Parent Viewer screen and speaker turn on for babbling and louder sounds from your baby. The Parent Viewer remains quiet when your baby makes soft sounds.	The Parent Viewer screen and speaker turn on only for loud crying or screeching sounds from your baby. The Parent Viewer remains quiet when your baby makes soft sounds.

### Sound Activated Screen and Audio - Auto Wake-Up

When **Auto Wake-Up** is turned on, the Parent Viewer screen stays off to save power when the Baby Unit detects no sound. Once the Baby Unit detects sounds that are louder than the chosen sound sensitivity level, the Parent Viewer screen and speaker turn on automatically. The Parent Viewer will then turn off again after no sound has been detected for a while.

### Notes:

- If you have muted the Parent Viewer speaker, only the Parent Viewer screen will turn on when a sound is detected.
- If you have turned on **Auto Wake Up** but turned off **Sound Detection Alert**, the Parent Viewer will wake up when the Baby Unit detects sounds that are louder than the chosen sound sensitivity level.

## The RBRC seal

The RBRC seal on the Li-ion battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada. The program provides a convenient alternative to placing used Li-ion batteries into the trash or municipal waste, which may be illegal in your area. VTech's participation makes it easy for you to drop off the spent battery at local retailers participating in the program or at authorized V'Tech product service centers. Please call 1 (800) 8 BATTERY® for information on Li-ion battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Call2recycle, Inc.

## FCC and IC regulations

FCC Part 15
This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**WARNING:** Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The Baby Unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in (20 cm) or more. The transmitter and antenna of the Parent Viewer shall be held at least 1 in (2.5 cm) from your face. This Class B digital apparatus complies with Canadian requirement: CAN ICES-3 (B)/NMB-3(B)

### Industry Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device. The term "IC" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

### RF radiation exposure statement

The product complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The Baby Unit should be installed and operated with a minimum distance of 8 in (20 cm) between the Baby Unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.

## California Energy Commission battery charging testing mode




This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your baby monitor is set up to comply with the energy-conserving standards right out of the box. Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the Parent Viewer is paired to Baby Units, the CEC battery charging testing mode is activated while it is powered off and charging.

## Motion Detection

### Adjust Motion Detection Sensitivity

You can turn on **Motion Alert** and adjust the Baby Unit's **Motion Sensitivity** to only detect your desired level of motion. When the Baby Unit detects motions that exceed the chosen level, the Parent Viewer screen turns on if it has been switched off or dimmed, and the Baby Unit displays the live video feed. You will immediately be able to see and hear your baby.



If you have turned on **Motion Alert**, the Parent Viewer beeps when the Baby Unit detects movements.


Motion Sensitivity Level	Level 3 (Highest)	Level 2 (Medium)	Level 1 (Lowest)
			
Description	The Parent Viewer screen and speaker turn on for small motions, such as yawning or stretching.	The Parent Viewer screen and speaker turn on for normal daily motions, such as people walking around the house.	The Parent Viewer screen and speaker only turn on for large motions, such as children running or jumping around.

## Night Light













Want a softer hue from the Baby Unit's night light to relax your little one? You can control the brightness of its glow remotely from your Parent Viewer, or directly on the Baby Unit.

### Adjust the night light with the Parent Viewer

- Press the **Night Mode quick set key** .
- Press  to brighten the night light (or turn on the night light when it is switched off).

Press  to dim the night light (or turn off the night light when it is at the lowest brightness level).

- OR -

- Press  to enter the main menu.
- Press  and  to select , press .
- Press  and  to select , press .
- Press  and  to choose the desired brightness level, then press  to confirm your selection.

### Note

- If Auto Brightness has been pre-selected, any adjustment in night light brightness (either on the Baby Unit or the Parent Viewer) will automatically turn off Auto Brightness mode and switch to the fixed level of brightness.

## For cETL compliance only

Mesures de sécurité importantes
La plaque signalétique appliquée est située au bas du socle de l'unité du bébé.

Lorsque vous utilisez votre appareil, vous devez toujours suivre certaines précautions et par conséquent, vous ne devez pas vous exposer à des températures élevées ou basses et à une pression d'air à haute altitude pendant l'utilisation, le repositionage ou le transport. L'élimination de la pile dans le feu ou dans un feu chaud, ou l'accrètement ou le découpage mécanique de la pile peuvent entraîner une explosion. Laisser la pile dans un environnement à température extrêmement élevée peut entraîner une explosion ou la fuite d'un liquide ou d'un gaz inflammable. Une pile soumise à une pression d'air extrêmement basse peut provoquer une explosion ou une fuite de liquide ou de gaz inflammable. Éliminer la pile usagée conformément aux informations du Scans RBRC.

- Observez toutes les instructions et mises en garde inscrites sur l'appareil.
- L'installation par un adulte est requise.
- MISE EN GARDE: N'installez pas l'unité du bébé à une hauteur supérieure à 2 mètres.
- Ce produit ne remplace pas la surveillance adulte du nourrisson. La supervision du nourrisson est la responsabilité du parent ou de la personne qui s'occupe de l'enfant. Ce produit pourrait cesser de fonctionner et, par conséquent, vous ne devez pas présumer qu'il continuera de fonctionner correctement pendant une période de temps donnée. De plus, si ne s'agit pas d'un instrument médical et ne devrait pas être utilisé comme tel. Ce produit est destiné à vous aider à superviser votre bébé.
- N'utilisez pas cet appareil près de l'eau ni de toute autre source d'humidité, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans un sous-sol humide ni près d'une piscine, dans un sous-sol humide ou une douche.
- MISE EN GARDE: Utilisez uniquement le fil fourni. Un risque d'explosion pourrait survenir si un mauvais type de fil est utilisé pour l'unité du parent. La pile ne peut pas être soumise à des températures extrêmes élevées ou basses et à une faible pression d'air à haute altitude pendant l'utilisation, le repositionage ou le transport. L'élimination de la pile dans le feu ou dans un feu chaud, ou l'accrètement ou le découpage mécanique de la pile peuvent entraîner une explosion. Laisser la pile dans un environnement à température extrêmement élevée peut entraîner une explosion ou la fuite d'un liquide ou d'un gaz inflammable. Une pile soumise à une pression d'air extrêmement basse peut provoquer une explosion ou une fuite de liquide ou de gaz inflammable. Éliminer la pile usagée conformément aux informations du Scans RBRC.
- N'utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un adaptateur dont la polarité ou la tension serait inadéquate risque d'endommager sérieusement le produit et mettre votre sécurité en péril.

 Informations sur les adaptateurs électriques : Adaptateur de l'unité du parent : Sortie : 5V DC 2A V'Tech Telecommunications Ltd. Modèle: VT07EU505200

Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A V'Tech Telecommunications Ltd. Modèle: VT07EU505150

 Informations sur les piles rechargeables : Zhuhai Great Power Energy Co., Ltd. Lithium battery, 3.7V 5000mAh. Modèle: GSP806090-5AA-3.7V-151P

- Lorsqu'ils sont branchés dans une prise de courant, les adaptateurs secteur ont été conçus pour être orientés correctement, soit à la verticale ou au plancher. Les broches riches dans une prise au plafond, sous une table ou dans un meuble d'alimentation et le maintien en place si celui-ci est branché dans une prise au plafond, sous une table ou dans un meuble.
- Pour les PRODUITS A BRANCHER À UNE PRISE DE COURANT, la prise de courant doit être installée près du produit, afin d'assurer une accessibilité sécuritaire à la prise de courant.
- Débranchez ce produit de la prise de courant avant de procéder au nettoyage. N'utilisez pas de nettoyeurs à vapeur. Utilisez un chiffon humide pour le nettoyer.
- Ne coupez pas les cordons d'alimentation pour remplacer les fiches, car ceci peut présenter un danger potentiel.
- Ne laissez aucun objet reposer ni appuyer sur le cordon d'alimentation. N'installez pas cet appareil dans un endroit où l'on risque d'écraser le cordon d'alimentation ou de le serrer.
- Ne faites fonctionner cet appareil qu'avec le type d'alimentation indiquée sur l'étiquette. Si vous ne connaissez pas le type d'alimentation que vous possédez à votre domicile, consultez votre marchand ou votre compagnie locale d'électricité.
- Ne surchargez pas les prises de courant murales ni les rallonges électriques.
- Ne placez pas cet appareil sur un chariot, meuble, trépied, support de montage ni table chancelante.
- Les trous et ouvertures du boîtier, situés à l'arrière de l'appareil ou sous celui-ci, servent à aérer l'appareil. Pour l'empêcher de surchauffer, ne bloquez sous aucun prétexte ces ouvertures et n'empêchez pas l'aération adéquate de l'appareil en le plaçant sur un lit, divan, tapis ou toute autre surface similaire. De même, ne le positionnez pas à proximité ni au-dessus d'une source de chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avant de vous assurer qu'il y a une bonne circulation d'air.
- N'évitez jamais d'objets à travers les ouvertures de cet appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent générer en incendies ou en risques d'électrocution. Ne renversez jamais de liquide sur l'appareil.
- Afin de réduire les risques d'électrocution, ne démontez pas cet appareil, mais appelez un centre de service autorisé. L'ouverture du boîtier ou le retrait de toutes pièces qui couvrent cet appareil, à l'exception des accès autorisés à certaines portes ou ouvertures, risque de vous exposer à des points de tension dangereux ou d'autres dangers. Un pontage incorrect peut par la suite présenter des risques d'électrocution.
- Vous devriez tester la réception chaque fois que vous mettez l'appareil en fonction.
- Il existe un très faible risque de perte de confidentialité avec certains appareils électroniques (autres écouteurs-bébé, téléphones sans fil, etc.). Pour éviter, à assurer que le produit n'a jamais été utilisé avant l'achat, réinitialiser l'unité de façon périodique, éteindre l'écoute-bébé quand il n'est pas en cours d'utilisation.
- Les enfants devraient être supervisés afin de vous assurer qu'ils ne jouent pas avec l'appareil.
- Le produit n'est pas conçu pour être utilisé par des personnes (incluant des enfants) aux capacités physiques, sensorielles ou mentales réduites ou qui manquent d'expérience et de connaissances, à moins qu'un leur ait donné suffisamment de supervision ou d'instructions relatives à l'utilisation de l'appareil par une personne responsable de leur sécurité. **CONSERVEZ CES INSTRUCTIONS.**

Mises en garde

- Utilisez et entreposez le produit à une température entre 0 °C (32° F) et 40° C (104° F).
- N'exposez pas cet appareil à des froids ou des chaleurs extrêmes, ainsi qu'à la lumière directe du soleil. Ne l'installez pas près d'une source de chauffage.
- Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière du soleil ou au feu.
-  Avertissement - Risque de strangulation
  - Les enfants se sont ÉTRANGLES dans des cordons. Gardez ce cordon hors de portée des enfants (à plus de 0,9 m). N'enlevez pas cette étiquette.
- Ne jamais placer le moniteur à l'intérieur du berceau ou du parc de bébé. Ne jamais couvrir le moniteur ou l'unité (s) portative avec un article tel une serviette ou une couverture.
- D'autres équipements électroniques peuvent produire des interférences sur votre moniteur vidéo et audio. Testez d'installer votre moniteur vidéo ou audio à l'écart des appareils électroniques tels que des cordons sans fil, radiotelephones cellulaires, interphones, montres, téléphones, ordinateurs personnels, électroménagers et téléphones sans fil. Stimulateurs cardiaques implantés dans l'organisme. Les stimulateurs cardiaques (ne s'applique qu'aux dispositifs numériques sans fil) L'organisme "Wireless Technology Research, LLC (WTR)", une firme de recherche indépendante, a mené une évaluation pluridisciplinaire des interférences entre les téléphones sans fil portatifs et les stimulateurs cardiaques implantés dans l'organisme. Appuyez par l'Administration des aliments et drogues (FDA) des États-Unis, la firme WTR recommande aux médecins:

Vous devriez maintenir les dispositifs sans fil à au moins six pouces du stimulateur cardiaque.

- ils ne doivent PAS placer le téléphone sans fil directement sur le stimulateur cardiaque, tel que dans une poche de chemise, lorsque celui-ci est en fonction.

L'étude effectuée par l'organisme WRS n'a pas identifié de risque pour les détenteurs de stimulateurs cardiaques causés par les gens qui utilisent des dispositifs sans fil à proximité de ceux-ci. Champs électromagnétiques (EMF) Ce produit de Leapfrog est conforme à toutes les normes se rapportant aux champs électromagnétiques (EMF) standard. Si vous le manipulez correctement en suivant les instructions de ce guide, son utilisation sera sécuritaire pendant de nombreuses années, selon les meilleures evidences scientifiques dont nous disposons aujourd'hui.





## Dim Mode

The Parent Viewer display will dim to conserve energy after 5 minutes of inactivity, in which there were neither any key pressed nor alert received from the Baby Unit.



## For LF915-2HD and Pairing with LF920-0HD Only


### Monitoring mode

-   Single CAM mode
  - Select Baby Unit 1  or Baby Unit 2  to view the image from the selected Baby Unit.





### Patrol mode

-  Select Patrol mode as your monitoring mode to automatically view the image from Baby Units 1  and 2  every 10 seconds.

### Split mode

-  Select Split mode as your monitoring mode to view the images from both Baby Units at once.

### Note

- While in Split mode, you can press  or  to highlight the view of the Baby Unit 1  or Baby Unit 2  and hear the sounds transmitted from the highlighted Baby Unit.

## Disclaimer and Limitation of Liability

Leapfrog and its suppliers assume no responsibility for any damage or loss resulting from the use of this handbook. Leapfrog and its suppliers assume no responsibility for any loss or claims by third parties that may arise through the use of this software. Leapfrog and its suppliers assume no responsibility for any damage or loss caused by deletion of data as a result of malfunction, dead battery, or repairs. Be sure to make backup copies of important data on other media to protect against data loss.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION. **CAN ICES-3 (B)/NMB-3(B)**

**CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Warranty:** Please visit our website at leapfrog.com for full details of the warranty provided in your country.

## Customer Support

Visit our Consumer Support website 24 hours a day at:

**U.S.:** leapfrog.com/support



**C.A.:** leapfrog.ca/support



Or call our **Customer Service number:** 1 (800) 701-5327 in the U.S. and Canada during Customer Service hours Monday to Friday, 9am - 6pm Central Time

## Mount the baby unit on a dry wall (optional)

### Notes


- Check for reception strength and the Baby Unit's viewing angle before drilling the holes.
- The types of screws and anchors you need depend on the composition of the wall. You may need to purchase the screws and anchors separately to mount your Baby Units.

- Place the wall mount bracket on a wall and then use a pencil to mark the top and the bottom holes as shown. Remove the wall mount bracket and drill two holes in the wall (7/32 inch drill bit). 
- If you drill the holes into a stud, go to step 3. If you drill the holes into an object other than a stud, insert the wall anchors into the holes. Tap gently on the ends with a hammer until the wall anchors are flush with the wall. 

- Align the wall mount bracket and screws with the holes in the wall as shown. Tighten the screw in the middle hole first, so that the wall mount bracket position is fixed. You can tighten the other screw in the top hole. 
- Insert the screws into the holes and tighten the screws until only 1/4 inch of the screws are exposed. 

- Place the Baby Unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the Baby Unit. 

- Place the Baby Unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the Baby Unit. Align the holes on the wall mount bracket with the screws on the wall, and slide the wall mount bracket down until it locks into place. 

- You can maximize your Baby Unit's viewing angles by tilting the wall mount bracket. Hold the Baby Unit, and then rotate the knob in an anti-clockwise direction. This will loosen the joint of the wall mount bracket. Tilt your Baby Unit up or down to adjust to your preferred angle. Then, rotate the knob in a clockwise direction to tighten the joint and secure the angle. 

## Instructions for Care

FOR INDOOR, DRY-LOCATION USE ONLY.

To keep this product in good condition, follow these guidelines:

- Avoid putting it near heating appliances and devices that generate electrical noise (for example, motors or fluorescent lamps).
- Do not put any kind on this product or immerse the product in water as it may render it inoperative.
- Keep food and beverages away from this product.
- Clean with a slightly damp cloth in cold water (do not use soap, detergent, or other chemicals).
- Never try to dismantle the unit.
- Make sure the product is dry before you connect it to the power source again.
- Avoid dropping the product or treating it roughly.
- Avoid prolonged exposure to extreme temperatures and direct sunlight or moisture.

Troubleshooting	
Symptom	Try this
Why does the baby monitor not respond normally?	Try the following (in the order listed) for a common cure: <ol style="list-style-type: none"><li>Disconnect the power to the the Baby Unit(s) and Parent Viewer.</li> <li>Wait a few seconds before connecting power back to the Baby Unit(s) and Parent Viewer.</li> <li>Turn on the Baby Unit(s) and the Parent Viewer.</li> <li>Wait for the Parent Viewer to synchronize with the Baby Unit(s). Allow up to one minute for this to take place.</li></ol>
Why doesn't the Baby Unit's and Parent Viewer's power LED turn on when I switch on the units?	The Parent Viewer may not be connected to power. Insert the appliance plug into the power jack of the Parent Viewer and put the adapter in a wall socket. Then, press the  Power button on the Parent Viewer to establish connection with the Baby Unit. <p>The Baby Unit may not be connected to power. Insert the appliance plug into the power jack of the Baby Unit and put the adapter in a wall socket. Then, slide the On/Off switch on the Baby Unit to establish connection with the Parent Viewer.</p>
Why doesn't my Parent Viewer charge when connected to AC power?	Make sure your power source is not controlled by a wall switch.
Why are my images in black and white?	The images are in black white during night-time or in a dark room when night vision is automatically activated. You can also choose to view your baby at night in color, see <b>Night Vision (B&amp;W and Color)</b> to learn how.
Why is the Baby Unit producing a high-pitched noise?	The Parent Viewer and Baby Unit(s) may be too close to each other. <ul style="list-style-type: none"><li>Move the Parent Viewer away from the Baby Unit(s) until the noise stops (OR)</li> <li>Turn down the volume of your Parent Viewer.</li></ul>
Why does the Parent Viewer beep?	The Baby Unit(s) may be out of range. Move the Parent Viewer closer to the Baby Unit(s) (but not less than 3 feet). <p>The Parent Viewer may not have enough battery for the Parent Viewer to perform normally. Charge the Parent Viewer until the battery icon becomes solid .</p> <p>The temperature of your baby's room may be too high or too low.</p>
Why can't I hear any sounds from the Parent Viewer? Why can't I hear my baby cry?	The Parent Viewer speaker volume may be too low or muted. Press <b>VOL</b> to open the volume adjustment menu, then press  to increase the speaker volume. Or you can use the Parent Viewer menu to change the Parent Viewer's sound sensitivity to the highest level (level 5), see <b>Sound Detection and Auto Wake Up</b> .
Why can't I establish a connection? Why does my connection cut off every now and then? Why are there sound interruptions?	The Baby Unit(s) may be out of range. Move the Parent Viewer closer to the Baby Unit(s) (but not less than 3 feet). <p>Other electronic and wireless products may cause interference with your baby monitor. Try installing your baby monitor as far away from these devices as possible.</p> <p>If you powered on only one Baby Unit but have two paired to the Parent Viewer, your Parent Viewer may display  and the LINK LED light flashes. Switch to the Baby Unit you have turned on via the menu.</p>