


# Source

## Internet radio

### Play Internet radio station

The Internet radio stations are organized into different categories. You can search for and play the desired Internet radio station by browsing through the available categories. If the desired radio station is not available, you can add it to the IS9181 radio stations using the VTech website (see page 22). To play the Internet radio station:

1. Press **SOURCE**.
  2. Rotate the dial to highlight **Internet Radio** and press **SELECT**.
  3. Rotate the dial to highlight the desired browsing method and press **SELECT**. Repeat this process until you reach a list of radio stations (the  icon appears to the left of the station name).
- Depending on the list of radio stations available on the Internet, your browsing experience may differ. A typical session may go through several levels of options - for example:


#### **Locations**

##### **North America**

##### **United States**

##### **California**

##### **Alternative**

Source
<b>Internet Radio</b>
My Music
FM Radio
Aux In
Internet Radio
 Genres
 <b>Locations</b>
 Languages
 Most Popular Stations
 My Stations



**NOTE:** To make browsing easier, your country (USA or Canada) will show up on the top of the list of countries.



# Source

## Internet radio

### Play Internet radio station

4. Rotate the dial to highlight the desired radio station and press **SELECT**. The selected radio station plays.

To mute the sound, press . To resume the sound, press  again.


Press  to play the previous station on the list. Press  to play the next station on the list.

Press **BACK** to return to the previous screen.

Press **SOURCE** to go back to the top source menu which will show **Internet Radio - Top**.

If you have chosen Internet radio as your source and you press **MENU**, two additional items appear at the top of the menu:

- **Now Playing** - returns you to the Internet radio playing screen.
- **Add to Favorites** - see page 59 for instructions.



Sample of Internet radio station playing

# Source

## Internet radio

### My Stations

You can search for and add Internet radio stations to the **My stations** folder at <http://vtech.vtuner.com/setupapp/vtech/asp/browsestations/vtunertemplate.asp>. Use this website when you are unable to find a radio station on the IS9181, you want more search options, and when you want the convenience of a computer screen for viewing all the station choices.

If you have not added any stations from the VTech website and you try to access **My Stations**, you will see the following message: **No added stations**.

### Create an online account

From your computer, open a web browser and go to <http://vtech.vtuner.com/setupapp/vtech/asp/browsestations/vtunertemplate.asp>. On the **vTuner Login** page click on **Create account** and follow the instructions. You will need the 8-character **Web Code** from the IS9181 **Product ID** screen (see page 19).

If more than one IS9181 is registered to the same email address, the web code of each registered IS9181 is shown after you login. Click the desired web code and the **My stations** page displays (page 24).

The screenshot shows the VTech website's 'Create Account Login' page. At the top, there is a navigation bar with the VTech logo, a 'Standard Shipping' badge (on orders over \$100), and links for 'Product Support', 'Where to Buy', and 'Shopping Cart'. Below this is a search bar. The main navigation menu includes 'Home', 'Cordless Phones', 'Internet Phones', 'Accessories', 'Deals', 'Buying Guides', and 'Phone Finder'. The 'Phone Finder' link is highlighted with a red box. The page content area has a breadcrumb trail 'Home > Phone Finder' and a 'Help' link. The main heading is 'Create Account Login'. It contains two numbered steps: 1. 'Please enter the Web Code for your Media Player' with a text input field and a 'Web Code' label. 2. 'Type in your Email Address, then enter in your Password twice to verify accuracy, click the register link to continue. Please keep track of your password since it will be used every time you log in to your account.' This step includes three input fields: one for 'E-Mail Address', one for 'Password: Must be at least 6 characters', and one for 'Enter Password Again:'. At the bottom of the form is a red 'Register' button.

# Source

## Internet radio

### My Stations

#### Search for Internet radio stations online

1. Enter the radio station name (Charlie), call letters (KYCH), number (97.1), or location (Portland) in the **Search** box on the left side of the screen. Then click the **GO>>** button.

**-OR-**

Browse the list of radio stations provided: **By location**, **By genre**, **By Language**, **New Stations**, and **Most Popular**.

2. When you find a radio station you want to save, click the **Add to my Stations>>** button. The radio station is saved in the **My Stations** page on the website and in the **My Stations** folder on your IS9181.

**vtech** \$5 Standard Shipping on orders over \$100 [Product Support](#) | [Where to Buy](#) | [Shopping Cart](#)

Search  **GO**

Home | Cordless Phones | Internet Phones | Accessories | Deals | Buying Guides | Phone Finder

**Stations for Most Popular**

Station Name	Location	Genre	Stream
NOS Radio 1	Netherlands	News	MP3 128K
SWR3	Baden-Baden Germany	Public/Top 40	MP3 64K
Absolute Radio	London United Kingdom	Pop	MP3 128K
Antenne Bayern	Ismaning Germany	Top 40	MP3 128K

**Search**  
  
**GO>>**

**Browse Stations**  
By location  
By genre  
By language  
New Stations  
Most Popular

**PLAY** **Add to my Stations>>**

# Source

## Internet radio

### My Stations

#### Find a Internet radio station by URL

1. On the left side of the website under **My Account**, click **My stations**. The My stations page appears.
2. Click **Add A New Station>>**.
3. When you have completed all fields, click the **GO>>** button. The radio station is saved in the **My stations** page on the website and in the **My Stations** folder on your IS9181.

The screenshot shows the vtech website's 'My stations' page. The top navigation bar includes 'vtech', 'Standard Shipping on orders over \$100', and links for 'Product Support', 'Where to Buy', and 'Shopping Cart'. A search bar is located on the right. Below the navigation bar, a red banner features a 'Phone Finder' button. The main content area is titled 'Home > Phone Finder' and 'My stations'. On the left, there is a 'Help' section, a search bar, and a 'GO >>' button. Below this, a list of 'Browse Stations' options is provided: 'By location', 'By genre', 'By language', 'New Stations', and 'Most Popular'. A 'My Account' section is highlighted with a red box, containing links for 'My stations' and 'My preferences'. At the bottom left, there is a link to '<< Pima Homepage'. The main content area on the right displays 'Add A New Station >>' and 'No favorites available'.

The screenshot shows the vtech website's 'My Added Stations' page. The top navigation bar is identical to the previous page. The main content area is titled 'Home > Phone Finder' and 'My Added Stations'. On the left, there is a 'Help' section, a search bar, and a 'GO >>' button. Below this, a list of 'Browse Stations' options is provided: 'By location', 'By genre', 'By language', 'New Stations', and 'Most Popular'. A 'My Account' section is highlighted with a red box, containing links for 'My stations' and 'My preferences'. At the bottom left, there is a link to '<< Pima Homepage'. The main content area on the right contains a form for adding a new station. The form includes fields for 'Station Name', 'Station URL' (with a hint: '(for example, http://62.168.116.98:8000/dsp1)'), 'Location' (with a hint: '(for example, Canada, Germany, Buenos Aires)'), 'Genre' (with a hint: '(for example, Classical, Dance, Rock)'), and 'Type' (with a dropdown menu showing 'MP3' and a 'GO >>' button).

# Source

## Internet radio

### My Stations

#### Suggest a station

Not all radio stations broadcast over the internet and vTuner does not provide access to every station in the world that does broadcast over the Internet. If you know of a station that broadcasts over the Internet that is not in the vTuner Station list, you can suggest the station.

1. Click **Suggest a station** on the web page.
2. Enter the details on the screen. Click the **GO>>** button when finished.

The screenshot shows the vtech website's 'Suggest a station' form. The header includes the vtech logo, a '\$5 Standard Shipping' badge, and links for Product Support, Where to Buy, and Shopping Cart. A search bar is also present. The main navigation bar includes links for Home, Cordless Phones, Internet Phones, Accessories, Deals, Buying Guides, and Phone Finder. The 'Phone Finder' link is highlighted. The 'Suggest a station' form is located on the right side of the page. It includes a search bar with a 'GO >>' button, a 'Browse Stations' section with links for 'By location', 'By genre', 'By language', 'New Stations', and 'Most Popular', and a 'My Account' section with links for 'My stations', 'My preferences', 'Suggest a station', and 'Logout'. The form itself has fields for 'Your Name:', 'Your e-mail:', 'Station Name', 'Station Web Site', 'Location - Country /City', 'Station URL', and 'Genre'. There is also a 'Comments:' section with a text area and a 'GO >>' button. The form is titled 'Suggest a station' in red text.



# Source

## Internet radio

### My Stations

Play added Internet radio station

1. Press **MENU**.
2. Rotate the dial to highlight **Internet Radio** and press **SELECT**.
3. Rotate the dial to highlight **My Stations** and press **SELECT**. A list of all added radio stations appear.
4. Rotate the dial to highlight the desired station and press **SELECT**.



## Source

### My music

The IS9181 can play music stored on one or more computers on your wireless network.

Your computer must be on for the IS9181 to see and play your music files. The IS9181 only supports the following formats of music files:

- MP3
- WMA
- Real audio (only RA, RM, and RMVB)
- AAC (only MP4 and M4A)

If you use a Windows operating system go to the next page. If you use a Mac operating system go to page 45.



# Source


## My music

### Determine the version of your Windows operating system

If you do not know what operating system you are using:

1. Click on the Start menu.
2. Right click My Computer and click on Properties.


Windows 2000:



Windows XP:



Windows Vista (All versions):

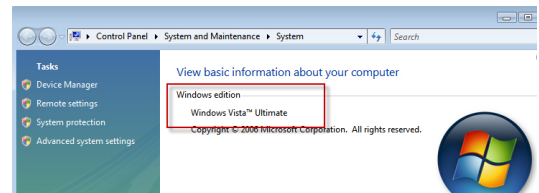

For setup PC setup instructions for Windows 2000 see pages 29-31.

For setup PC setup instructions for Windows XP see pages 32-37.

For setup PC setup instructions for Windows Vista see pages 38-44.


# Source

## My music

### Share a folder on Windows 2000 Professional

For the IS9181 to access the music on your computer, you must share the folder where the music is located.

1. Right click on the folder you wish to share.
2. Click on **Sharing**.
3. Check **Share this folder** and click **Apply**.

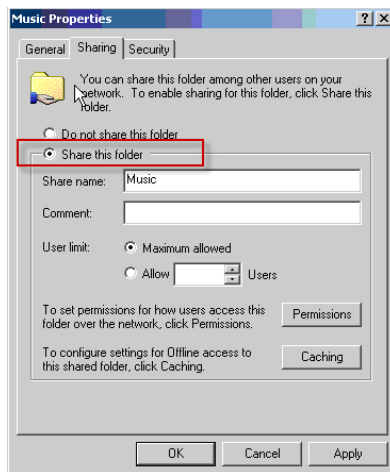



# Source

## My music

### Create a new user account for Windows 2000

You must create a new user account in Windows 2000 for the IS9181 to access the music on your computer. If you would like to access music files on multiple computers you will need to create the same user account with the same password on each computer.

1. Click the **Start** menu, then click **Control Panel**.
2. Click **Users and Passwords**, then click **Add**.
3. You **MUST** enter **IS9181** (the “IS” must be capitalized) as the **User name** and **Full name** then click **Next**.

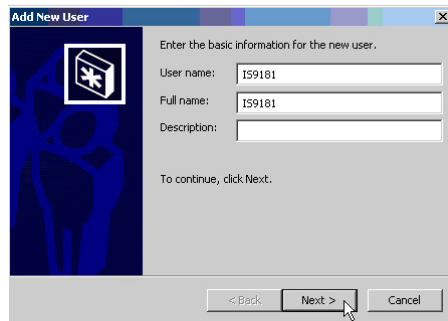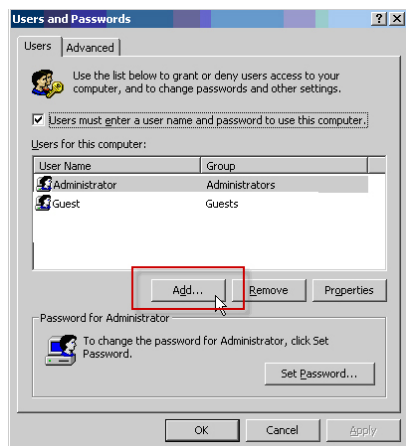

## Source


### My music

#### Create a new user account for Windows 2000


4. Create a password. Enter a password and click **Next**.

To ensure the security of your computer we recommend that you create a password for the IS9181 user account. A typical password consists of 6-8 characters including numbers and letters.

Note: If you are going to create the user account on multiple computers then you must use the same password on each.

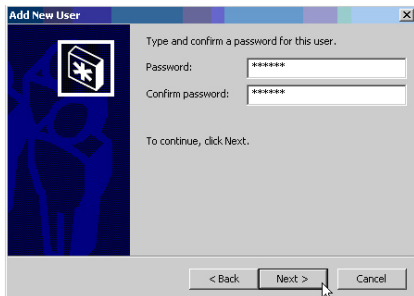

5. Select **Other: Administrators** as the account type and click **Finish**.

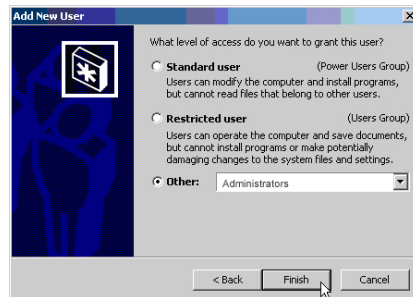


# Source

## My music

### Share a folder on Windows XP

For the IS9181 to access the music on your computer, you must share the folder where the music is located.

1. Right click on the folder you wish to share.
2. Click on **Sharing and Security**.
3. If you see one of the two screens shown below:

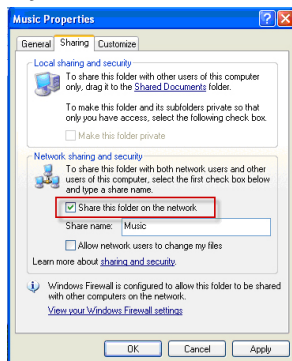

- a. Check the box next to: **Share this folder on the network**.
- b. Click **Apply**.


**-OR-**

# Source

## My music

### Share a folder on Windows XP

If you see the screen shown below, click on the phrase: **If you understand the security risks but want to share files without running the wizard, click here.**

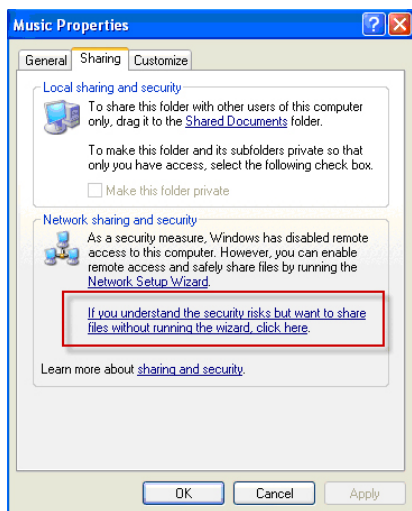

4. When the following message box appears, select **Just enable file sharing** and click **OK**.



# Source


## My music

### Create a new user account for Windows XP


You must create a new user account in Windows XP for the IS9181 to access the music on your computer. If you would like to access music files on multiple computers you need to create the same user account with the same password on each computer. When you boot up your computer, you will see the IS9181 user account on the login page.

1. Click the **Start** menu then click **Control Panel**.

The instructions are given in the Category View (the Windows default) as shown below.

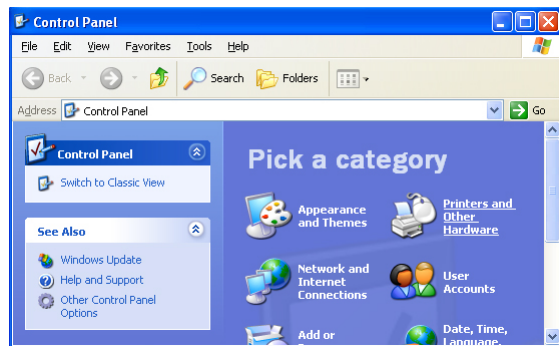

If your Control Panel is in Classic View as shown below, click Switch to Category View.

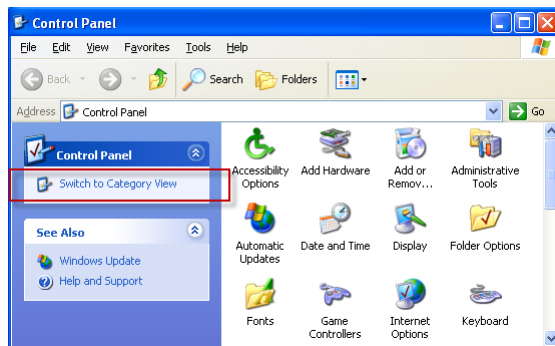


# Source

## My music

### Create a new user account for Windows XP

2. Click **User Accounts**, then click **Create a new account**.




3. You **MUST** Enter **IS9181** (the "IS" must be capitalized) as the new account name then click **Next**.

Note: If you are going to create the user account on multiple computers, then you must use the same account name.



4. Select **Computer administrator** as the account type.

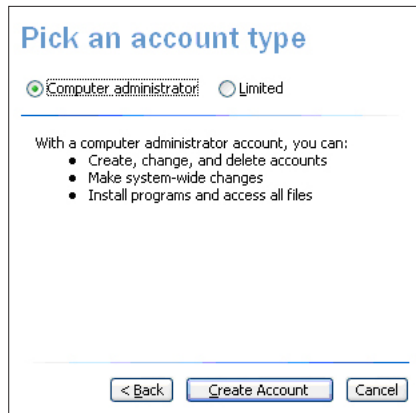



# Source



## My music

### Create a new user account for Windows XP

5. Create a password. Click on the user icon next to the IS9181 user account, then click **Create a password**.

To ensure the security of your computer we recommend that you create a password for the IS9181 user account. A typical password consists of 6-8 characters, including numbers and letters.

Note: If you are going to create the user account on multiple computers then you must use the same password.

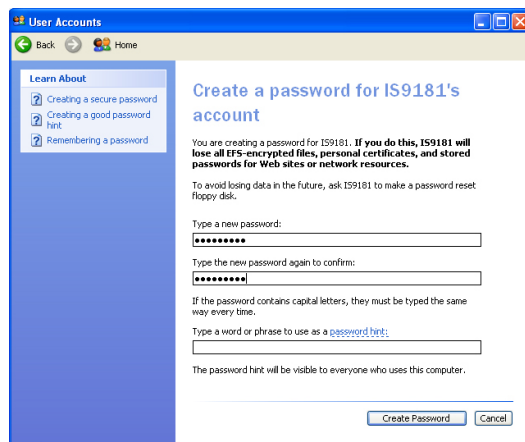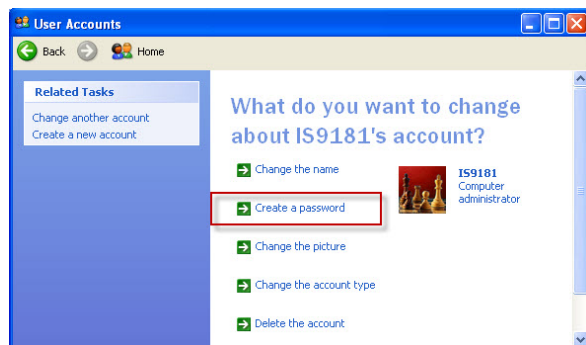


# Source

## My music

### Create a new user account for Windows XP

If you want to switch back to Classic View click on **Switch to Classic View**.

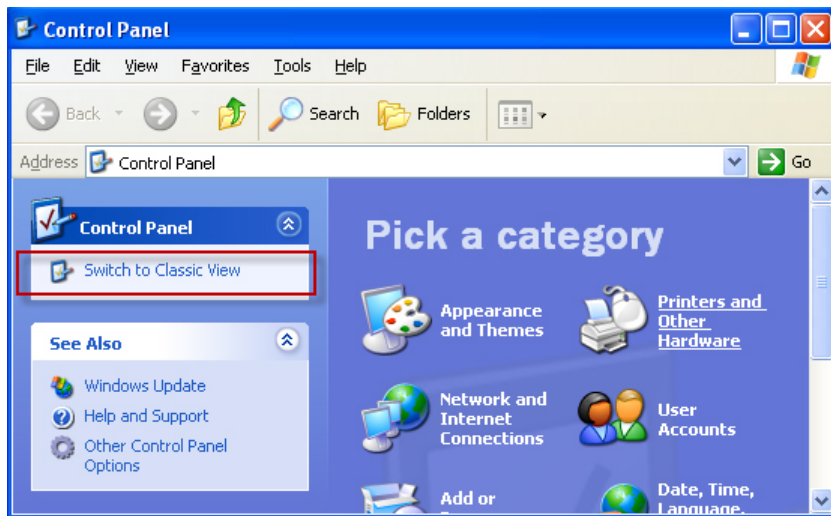

# Source


## My music

### Create new user account in Windows Vista


You must create a new user account in Windows Vista for the IS9181 to access the music on your computer. If you would like to access music files on multiple computers, you must create the same user account with the same password on each computer. When you boot up your computer, you will see the IS9181 user account on the login page.

1. Click the **Start** menu then click **Control Panel**.

The instructions are given in the Category View (the Windows default) as shown below.

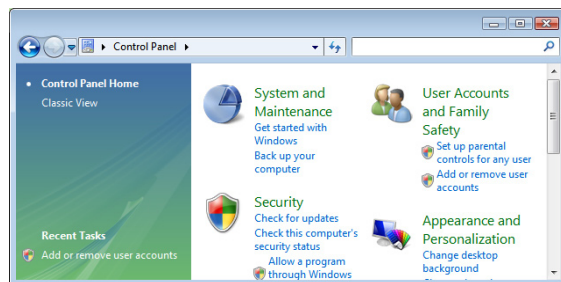

If your Control Panel is in Classic View as shown below, click Switch to Category View.


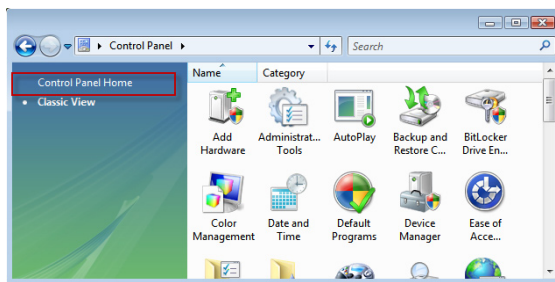


# Source


## My music

### Create new user account in Windows Vista

2. Click **User Accounts and Family Safety** or **User Accounts**.
3. Click **Add or remove user accounts**.

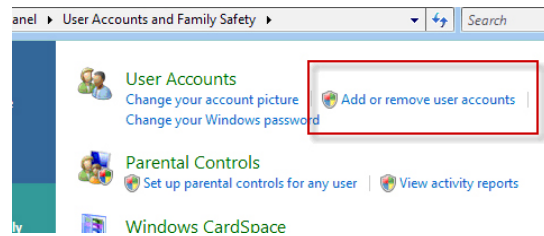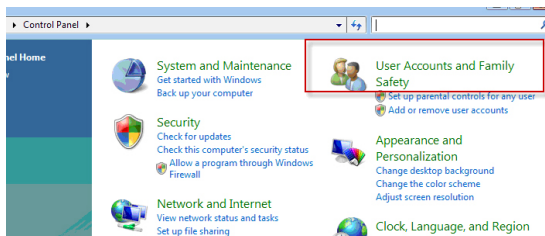

-OR-

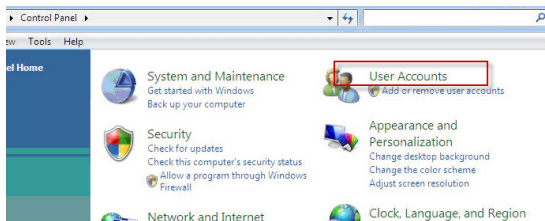


4. The **User Account Control** prompts for your permission, click **Continue**.

## Source

### My music

#### Create new user account in Windows Vista

5. Click **Create a new account**.

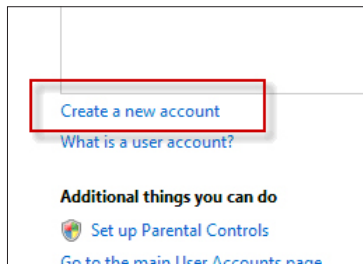

6. You **MUST** Enter **IS9181** (the "IS" must be capitalized) as the new account name.

7. Select **Administrator** as the account type.

8. Click **Create Account**.

Note: If you are going to create the IS9181 user account on multiple computers then you must use the same account name.

