

Bluetooth Stereo Headset



UB450 User Manual

Sports *Bluetooth*® Stereo Headset

Thank you for choosing the hotncold *Bluetooth*® Headset. Please read this manual carefully before using and keep it for future reference.

Important Safety Instructions

Keep the unit away from high temperature and high humidity.

Do not disassemble, modify or attempt to repair the unit.

Accessories List

1× UB450 Sports *Bluetooth*® Stereo Headset

1× USB charger Cable

4× Ear rubber

2× Ear hook

(Remark:UB450 is with middle size rubbers and ear hooks.)

Product Description

Sports *Bluetooth*® stereo headset

Bluetooth® version 4.0

Charging means: power adapter output (DC5V 150mAh)

Battery: high-capability rechargeable lithium polymer battery

RF power: class 2

Profiles: Headset, Handsfree, A2DP, AVRCP, APT-X

Talk time: up to 8 hours

Playing time: up to 8 hours

Standby time: up to 180 hours

- This product can accept audio file from any *Bluetooth*® devices like *Bluetooth*® mobile phones, notebooks.
- When being connected to *Bluetooth*® DONGLE on PC, it can play any audio files on the computer. You can use it for voice chat to achieve wireless QQ.MSN.SKYPE.

Cautions

- Please keep or use this product at normal temperature;
- Do not expose this product in rain or moisture;
- Do not throw this product to avoid any damage;
- Do not disassemble, repair or reform this product;
- Do not clean this product with any chemical solvents;
- Please use USB power of DC5V for output when needed;
- Do not throw away or put it in high temperature(higher than 60 C) fire to avoid any danger.

Warning

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF warning statement: the device has been evaluated to meet general RF exposure requirement , The device can be used in portable exposure condition without restriction.

FCC ID:HBOUB450



WARNING

- If water or other foreign objects enter the inside of the device, fire or electric shock may result.
- Do not attempt to modify this product. Doing so could result in personal injury and/or product failure.



CAUTION

- Never disassemble or modify the device, as failures may result.
- Do not subject to extreme force and do not pull on the cable or failures may result.
- Keep the product dry and avoid exposure to extreme temperatures and humidity.

WARRANTY TERMS & CONDITIONS

The warranty will be effective only if the warranty card is completed and returned to the company within 14 days from the date of purchase. We guarantee the provision of free services of the product within the warranty period, from its date of purchase from our Authorised Dealer. The period and conditions of our warranty service are as follow:

1. The warranty covers services by our Authorised Dealer. This warranty card together with the receipt must be presented when servicing is required. This warranty card is irreplaceable in the event of loss.

2. Repair services will be provided for defects arising from normal usage for the following period, commencing from the date of purchase from our Authorised Dealer. (Parts would be replaced when necessary)

- A. Parts:..... 1 year
- B. Technical service free..... 1 year

3. Under the following circumstances, service and parts will be chargeable even within the warranty period:

A. Failure to present the warranty card and receipt when servicing is required.
Full particulars not clearly shown or alterations made against the actual information.


For e.g.: Alteration of the date of purchase, serial numbers-altered or removed.

B. This unit being tampered with, altered in any way by any unauthorised technicians or which has been subjected to misuse, negligence or accident. This guarantee does not cover damage occurring in transit by or from the customer.


C. The defect is caused by the attack of household pests, fire, lighting, natural disasters, pollution, abnormal voltage or the usage of generator.

Product Overview

Right Channel

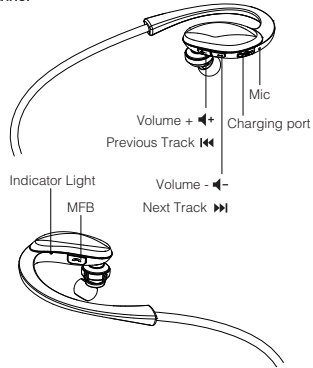

Left Channel



DISTRIBUTOR'S COPY
WARRANTY REGISTRATION CERTIFICATE

Mr./Mrs/Ms First Name: _____
Last Name: _____
Address: _____
Contact No.: _____
Product Name: _____
Model No.: _____
Serial No.: _____
Date Purchased: _____
Invoice No.: _____
Retail Outlet Where Purchased: _____

(Please print the name & address)

Function and Operation

- Power On:** Long press "MFB" for 2 seconds until the blue indicator light flashes.
- Power off:** With the headset on, long press "MFB" for 3 seconds, the red indicator light flashes 2 seconds and goes off.
- Answering a call:** Press the answer key on your phone or short press "MFB" on your headset.
- Ending a call:** Press the end key on your phone or short press "MFB" on your headset.
- Rejecting a call:** Press the end key on your phone or long press the "MFB" button for 2 seconds on your headset.
- Redialing the last called number:** Double press the "MFB" button when headset is in standby mode.
- Play/Pause:** When you are listening to the music from the headset, you can short press "MFB" to play and pause.
- Previous/Next Track:** Previous Track when press the "+" 2 seconds. Next Track when press the "-" 2 seconds.
- Volume control:** Volume will be up when short press "+" and will be down when short press "-".
- Microphone Mute:** During a call, press "-" for about 2 seconds it will mute, press "-" for about 2 seconds it will work again.

* MFB:Multi-Function Button

Pair to your Bluetooth® Phone

- Pair the **Bluetooth®** headset for the first time, the distance between the **Bluetooth®** headset and your **Bluetooth®** phone would be better within 1 meter when pairing.
- With the headset power off, hold and press "MFB" until the headset is pairing status, red light and blue light flash alternately.
- Start mobile phone **Bluetooth®** function.
- Search **Bluetooth®** device, Choose "UB450".
- Depending on your device you may be prompted to enter a pairing code. If prompted enter "0000" as the code.
- Repeat above-mentioned steps if the pairing was unsuccessful.
- The green light will flash if paired successfully.

Voice Prompt

When your UB450 isn't rocking out, it can tell you sorts of things it's doing: Power on; Power off; Your headset is enter pairing mode; Your headset is connected; Battery low.

NFC Function

The mobile phone only need to get close to the headset NFC detecting area when the headset is on.

Important: Different mobile phone brands or menu functions, the operation will be different. Please read your phone's manual carefully.

Voice dialing: On the status of standby, long press "MFB".

Low power alarm: When the headset is power on, if the battery voltage is lower than 3.3V, there will be a prompt and the red indicator light flashes every 20 seconds.

Charging status: Red indicator light remains solid when charging, the blue indicator light remains solid when completed.

Low power shutdown: When the headset is power on, if the battery voltage is lower than 3.0V, the headset will shutdown automatically.

Call switching: Call switching between mobile phone and headset: during a call, long press "MFB", the audio will be switched from the **Bluetooth®** headset to mobile phone; Long press "MFB", the audio will be switched from mobile phone back to the **Bluetooth®** headset.

Connect two Bluetooth® mobile phones at the same time:

- After paired the first mobile phone, please turn off the **Bluetooth®** function of the first mobile phone, then pair to the second **Bluetooth®** mobile phone.
- Open the first mobile phone **Bluetooth®** function, manual connection the first mobile phone.
- During a call, short press "MFB", hang up the current call, then answer the incoming call.
- Double press "MFB" to answer another incoming call while you are on one phone call, and switch between the two incoming calls.
- Short press "MFB" to cut off the incoming calls one by one.

Handling of the Waste Electrical

Note: While two mobile phones are connecting one **Bluetooth®** headset, some functions of the **Bluetooth®** headset will be restricted.

The Waste Electrical

This marking shown on the product or its literature indicates that it should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household user should contact either the retailer where they purchased this product or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This products should not be mixed with other commercial wastes for disposal.

