

User Manual

Foldable Keyboard



Issue Date: Apr. 26, 2004

Index

Introduction

Foldable Keyboard Specification 2

Open/Operating/Close Keyboard

Open Foldable keyboard 3

Use Foldable keyboard on laps 3

Close Foldable keyboard 4

Install the Keyboard Driver

Install the Keyboard Driver 6

Customize your keyboard

Configure the Keyboard 10

Combination Keys 12

Assign Hotkeys 11

Frequently Asked Questions 15

Technical Support 16

Introduction

Belkin Bluetooth Foldable Keyboard is a 2 fold type with PDA stand.

It connects with PDA via wireless Bluetooth. Connection distance is up to 7M. Hope it can bring you convenience of typing.

Foldable Keyboard Specification

Opened:	300*105*13.5 mm
Closed:	150*105*19.7 mm
Weight:	175 grams
Temperature Endurance:	65 °C
Power Consumption:	
Working:	10mA
Sleeping:	1300µA

You can get many benefits with the Foldable Keyboard :

Wireless connect with your Pocket PC device.


Fast type text into your Pocket PC device.

Quickly access your favorite Pocket PC applications.

Convenient Portability.

Open Keyboard

Open Foldable Keyboard

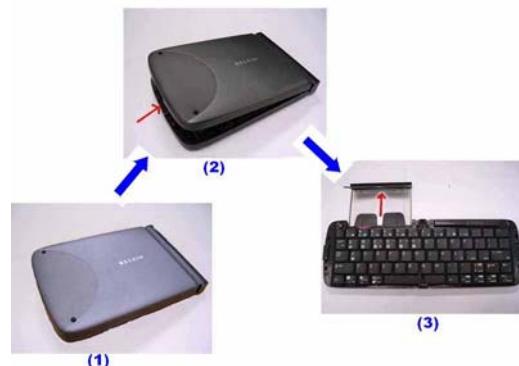


Step 1. Open the keyboard by pressing the button. [Photo (2)]

Step 2. Pull the PDA holder. [Photo (3)]

Using Keyboard on lap

Push Lock Pin to “Lock”, then you can use this foldable

keyboard on your laps. Just like below photo.



Close Keyboard

Close Foldable Keyboard



Step 1. Fold up the PDA Holder. [Photo (1)]

Step 2. Push the holder back inside Keyboard and fold up Keyboard. [Photo (2)]

Warning

Before closing keyboard, please remember to pull Lock Pin to “” position. Or, keyboard will be broken.



Install and Remove the Keyboard Driver

Install the Keyboard Driver

Please complete the following steps:

- 1).Check the part “ Before Installation “ first
- 2) Install the driver and then launch the software
- 3) Connect the keyboard to Palm device.


Before Installation

Please disable any other keyboard applications that you have installed on your Palm device to prevent conflicts

Make sure there is at least 100 Kb of free memory to install the driver.

Step1: Install the Driver


1. Connect the Palm device to a computer through the cradle or cable.
2. Establish connection between the computer and Palm device by using Palm HotSync.




3. Insert the CD Disk into the CD-ROM/ Floppy drive.
4. Tap twice on the **My Computer**  icon , and then choose
your CD-ROM drive  .
5. Choose the directory which contains the just language version of
driver that you want to install.
6. Execute **Setup.exe** inside the directory. Please follow the
on-screen procedure step by step.

Step 2: Launch the Software

1. Turn on the Palm PDA.
2. Tap  , see all applications  .



3. Tap the  icon, and add a check mark in the check box in front of the **ON**.




Step 3: Connect Keyboard to Palm Device

1. Now PDA will inquiry Bluetooth Keyboard.



2. At first time, you need to key-in Bluetooth Passkey (default value: 0000.) by Palm graffiti.



3. Put the Palm PDA on the Holder of keyboard.



Disconnect the Keyboard

Tap the connect/disconnect Bottom, Keyboard has been disconnected. You will see orange light sparkle.




Customize Your Keyboard

Configuring the Keyboard

You can have several kinds of typing feeling on your foldable Keyboard by customizing your keyboard:

1. On your Palm PDA, tap the BT KB icon and launch it.



2. Select the **Setting** tab.
3. Tap the **Enable Sound** check box to hear a click every time you press a key.
Select the **Delay until repeat** indicator to lengthen or shorten the time the keyboard waits before repeating a pressed key. The right side of the scale specifies a shorter delay time.
Select the **Keyboard repeat rate** indicator to speed up or slow down the rate at which the keyboard repeatedly displays a pressed key. The right side of the scale specifies a faster repeat rate.
Tap in the **Test string here:** field to enter characters from the keyboard.

Combination Keys

The keys on the Foldable Keyboard perform additional functions when pressed in the combinations indicated in below table.

For US/UK/Spanish/Chinese/Brazil/Italian versions


Keystroke Combination	Function
Shift (↑)+ letter key	Capital letter
Shift (↑) + number key	Upper left character on key
Fn+"1"	Main Menu
Fn+"2"	Function Menu for individual program
Fn+"3"	Find
Fn+"4"	Date Book
Fn+"5"	Address book
Fn+"6"	To Do List
Fn+"7"	Memo Pad
Fn+"8"	Calculator
Fn+"9"	Preference setup
Fn+";"	Open new item
Fn+"↑"	Scroll up

Fn+"↓"	Scroll down
Fn+"←"	Show item preference setting
Fn+"→"	Show detail information for items
Fn+"Delete"	Delete selected item
Fn+"Cancel"	Cancel this selection

Assign Cmdkeys

Through hotkey combinations Cmd+1 to Cmd +9, you can launch a variety of applications with just a few keystrokes by following the procedure below

1. On your Palm device, tap **Darfon BT Keyboard** application and launch it.
2. Select the **Cmdkeys** tab.



3. In the list, select the application you want to assign to the


Cmdkey combination. Then, you have finished the assignment of Cmdkeys.

Frequently Asked Questions

A) How do I uninstall the driver?

In Main Menu, select > Delete

Select **Darfon BT Keyboard** from the list of applications. Then press the **Delete** button the Palm for several seconds so your new settings can take effect.



B) I pressed a key on the keyboard, but the letter did not register.

Be sure the keyboard is connected to the Palm device via Bluetooth (the connection light will turn off). If the connection is secure, remove the keyboard driver from the Palm device, and then reinstall

it.

**C) My Palm will not sync through my serial cradle since
installing the Bluetooth Keyboard driver.**

It is necessary to disable the Bluetooth Keyboard driver prior to
synching through a serial connection. Please refer to "Launch the
Software", page 7 of this manual. Once you have completed
synching data, you must re-enable the driver to operate the
keyboard.

**For additional FAQ's and Belkin technical support, please visit
us at our website at: [Http://www.belkin.com](http://www.belkin.com)**

NOTE: The manufacturer is not responsible for any radio or TV
interference caused by unauthorized modification to this equipment