

# SPOT X USER GUIDE





### **TABLE OF CONTENTS**

WELCOME	
What's in the Box	1
Charging your SPOT X	1
ACTIVATING YOUR SPOT X	
Configuring your SPOT X	1
Electronic Serial Number (ESN), Authorization Code and Mobile Device Number (MDN)	2
Activating Your SPOT X and Selecting a Service Plan	2
SPOT X Firmware Update Required	2
SPOT X AT A GLANCE	
Device Overview	3
Main Menu Actions	3
Device Overview Functions	4
Status Bar Icons	5
Menu Display Icons	5
SPOT X Directional Pad	6
Screen Lock	6
Keyboard and Display Backlighting	6
SPOT X APP AT A GLANCE	
Connect the App with Smartphone	6
GETTING STARTED	
Important SPOT X Tips	
SPOT X Operating Temperatures	7
CONTACTS	
Manually Adding a Contact	8
Deleting a Contact	9
2-WAY MESSAGING	
Creating & Sending Messages	
Predefined Messages	
Social Media	11
Viewing All Messages	11

Viewing Individual Messages	12
Deleting Individual Message Threads	
Replying to a Message	
CHECK IN	
Sending a Check In Message	13
How to View Your Sent Check In Messages	13
Cancel Messages	13
SPOT S.O.V. (SAVE OUR VEHICLE)	
Initiating SPOT S.O.V.	14
S.O.S.	
Initiating S.O.S.	
Canceling S.O.S.	
TRACKING	
Select Tracking Interval	17
Initiating Tracking	17
Canceling Tracking	18
Suspended Tracking Mode	18
MESSAGE FETCHING	
Selecting a Message Fetching Rate	19
Manually Fetching New Messages	19
NAVIGATION	
Calibrating the Compass	20
Trip Information Data Fields	21
Configuring Trip Information Data Fields	21
WAYPOINTS	
Creating a Waypoint	22
Navigating to a Waypoint	
SYSTEM SETTINGS	
Viewing Data Usage	23
Viewing Service Plan Details	23

Language Settings	24
Time and Date Settings	24
Distance Unit Settings	25
Display Settings	25
SPOT X Information	25
Restore Factory Settings	25
Demo/Retail Mode	25
Regulatory Information	25
Sounds	25
SPOT MY ACCOUNT	
My Account Overview	26
MY ACCOUNT – MY DEVICES	
SPOT X My Devices Overview	27
MY ACCOUNT DEVICE NAME TAD	
MY ACCOUNT - DEVICE NAME TAB	20
Personalize the Device Name	29
MY ACCOUNT – TRACKING TAB	
Tracking	30
MY ACCOUNT – MOVEMENT ALERT TAB	
Configuring Movement Alerts	31
MY ACCOUNT – THIRD PARTY GPS FORWARDING TAB	
Enter a Third Party Identification Code	32
MY ACCOUNT – DUPPLICATE SETTINGS TAB	
Copy Device Setting to Another SPOT X	22
Copy Device Setting to Another SPOTA	აა
MY ACCOUNT – S.O.S. TAB	
Enter the Primary and Secondary Emergency Contacts	34
MY ACCOUNT – CONTACTS TAB	
Create New Contact	
Create New Contact Group	
Adding Contacts to the SPOT X	
Delete Contacts	36

## MY ACCOUNT - SPOT S.O.V. TAB MY ACCOUNT - SOCIAL MEDIA TAB **MY ACCOUNT - MESSAGE BLOCKER TAB** Delete from the Blacklist 40 MY ACCOUNT - PREDEFINED MESSAGES TAB Synching Predefined Messages to the SPOT X .......42 MY ACCOUNT - CHECK IN TAB Deleting an Email Address or Mobile Number ......44 MY ACCOUNT – UNDELIVERED MESSAGE NOTIFICATION TAB MY ACCOUNT - WAYPOINTS TAB MY ACCOUNT - MY LOCATIONS Set Filters 48

Create a Share Page50	MY	ACCOUNT - SHARE & GET SPOTTED PAGES	
	Cre	ate a Share Page	50

Create a Share Page	50
Create a Get Spotted Page	51
MY ACCOUNT – SETTINGS AND BILLING	
Settings & Billing Overview	52
SPOT X Message Usage	53
SYNCHING AND UPDATING FIRMWARE WITH MY ACCOUNT	-
Synching SPOT X	54
SPOT X Firmware Update	54
Troubleshooting	54
SPOT X SPECIFICATIONS	
SPOT X Specifications	55
CERTIFICATIONS	
FCC Compliance Statement	56
FCC Regulatory	56
Réglementation de la FCC	56
ISED RSS-GEN Notice	56
Industry Canada Regulatory	57
Canada Regulatory	57
Réglementation du Canada	
Declaration of Conformity for European Customers	57

**GENERAL WARNINGS** 

#### **WELCOME**

Thank you for purchasing your **SPOT X**. Now you can stay connected with family, friends, co-workers, and Search & Rescue services whenever you're off the grid.

#### WHAT'S IN THE BOX?

- SPOT X Device
- Strap and Carabiner
- 18" Micro USB Data/Power Cable
- Quick Start Guide

- Warranty Card
- GEOS Reference Guide
- S.O.S. Mirrored Sticker
- Important Safety & Product Information Guide

#### CHARGING YOUR SPOT X

Connect the Micro USB Data/Power Cable to the SPOT X USB Data/Power Port and connect to either a computer or an AC Power Adapter. The battery with the lightning bolt icon will be visible while charging.

Once the battery icon indicates a full charge, disconnect the USB Cable from the SPOT X. Make sure the USB cover is firmly sealed to ensure the device's waterproof capability.



#### **ACTIVATING YOUR SPOT X**

IMPORTANT: YOUR SPOT X REQUIRES AN ACTIVE SPOT SERVICE PLAN SUBSCRIPTION TO COMMUNICATE.

SPOT X FEATURES, INCLUDING S.O.S., WILL NOT WORK WITHOUT FIRST ACTIVATING YOUR DEVICE.

IF YOU ENCOUNTER ISSUES DURING ACTIVATION, PLEASE VISIT FINDMESPOT.COM/SPOTXSUPPORT FOR ASSISTANCE.

#### CONFIGURING YOUR SPOT X

- 1. Power on the SPOT X by quick pressing the Power button.
- 2. You can start the configuration process by selecting your desired language, time and date setting and follow all onscreen instructions.
- 3. The device ESN and Auth code will now be displayed for your reference during activation.

#### ACTIVATING YOUR SPOT X AND SELECTING A SERVICE PLAN

- 1. Go to FindMeSPOT.com/Activate
- 2. New SPOT customers should select **Begin Activation** to create a new account. Existing SPOT customers should login to their current SPOT account and select **Add New SPOT Device.**

# NOTE: ELECTRONIC SERIAL NUMBER (ESN), AUTHORIZATION CODE, AND MOBILE DEVICE NUMBER (MDN)

The ESN and Authorization Code can be found on the SPOT X device by selecting **System Settings** and scrolling to and selecting SPOT X Info. The ESN can also be found on the bottom of your SPOT X retail box or on the back of your device. You will need both the ESN and Authorization code when setting up your **SPOT MY ACCOUNT.** 

Your MDN will be assigned after you complete the **SPOT MY ACCOUNT** activation process. Share this number with others so they can message you directly!

3. Follow the onscreen instructions to create an account, choose a service plan and additional services for your SPOT X. Confirm your order to finish the **SPOT MY ACCOUNT** activation process.

#### SPOT X FIRMWARE UPDATE REQUIRED



ONCE YOU COMPLETE THE **SPOT MY ACCOUNT** ACTIVATION, MAKE SURE YOUR DEVICE IS UPDATED WITH THE LATEST FIRMWARE. SYNCING SPOT X WITH YOUR **SPOT MY ACCOUNT** WILL BE REQUIRED FOR SEVERAL FEATURES SUCH AS CONTACTS AND PREDEFINED MESSAGES TO APPEAR ON YOUR DEVICE.

VISIT FINDMESPOT.COM/FIRMWARE TO DOWNLOAD THE LATEST SPOT X FIRMWARE UPDATER.

#### **DEVICE OVERVIEW**

- Power/Backlight Button
- 2 Power LED
- 3 Display Screen
- 4 S.O.S. Button
- Directional Pad
- 6 Select Button
- 7 Track Button
- 8 Back Button
- QWERTY Keyboard
- USB Power/Data Port





#### **MAIN MENU ACTIONS**

- Opens Messages Screen
- 2 Creates New Messages
- Opens Contacts Screen
- 4 Sends Check In Message
- 5 Opens Track and Fetch Intervals Screen
- 6 Fetches New Messages
- Opens Navigation Screen
- Opens System Settings

### **DEVICE OVERVIEW FUNCTIONS**

	BLINKING GREEN	BLINK	ING RED	NO LED	
POWER LED	SPOT X is powered on and battery life is above 20%.	SPOT X on and is belo	is powered battery life ow 20%.	SPOT X has either entered power saving mode due to no button press or the unit is powered off.	
POWER BUTTON	Press the Power button to power on the SPOT X. Long press the Power button for 3 seconds to power OFF.		While the SPOT X is powered ON, quick press the Power button to toggle the screen and keyboard backlight on and off.		
S.O.S. BUTTON	Long press the S.O.S. button for 3 seconds or until S.O.S. screen is displayed to initiate an S.O.S. with GEOS IERCC.		While S.O.S. is active, long press the S.O.S. button for 3 seconds to cancel the S.O.S. with GEOS IERCC.		
TRACKING BUTTON	Long press the Track button for 3 seconds to initiate tracking mode at your set interval rate.		While Tracking Mode is active, long press the Track button for 3 seconds to cancel Tracking.		
DIRECTIONAL PAD	Press up, down, left and right to navigate to and highlight a section on the screen.		Press the Select button to make a selection.		
BACK BUTTON	Quick press the Back button to navigate to the previous screen.		Press and hold the Back button to go back to the Main Menu screen.		
QWERTY KEYPAD	Use the keyboard to create messages, contact names and other manual entries as required.				
DISPLAY SCREEN	The SPOT X Display screen allows for interaction with the Main Menu, sub-menus, and other onscreen features.				
USB POWER/DATA PORT	Used to connect a Micro USB Cable to the SPOT X USB Port to charge the SPOT X device and to sync with <b>SPOT MY ACCOUNT.</b>				

#### **STATUS BAR ICONS**

#### **BATTERY**

- Battery Strength
- Low Battery
- Battery Charging

#### **GPS SIGNAL**

**GPS** GPS Signal Available

GPS GPS Signal Unavailable

#### **DEVICE**

Sync Required

#### **MESSAGES**

- New Received Messages
- Fetching New Messages
- ♠ Pending Queued Messages
- Sending Check In Message

#### **MODES**

s.o.s. S.O.S. Active

**Tracking Active** 

Suspended Tracking

#### **TIME**

5:00 PM 12-Hour Format

**17:00** 24-Hour Format

#### **MENU DISPLAY ICONS**

#### **MESSAGES**

- Create New Message
- ↑ Send Message
- Reply to Message
- Predefined Messages

#### **CONTACTS**

- Contact List
- Create New Contact

#### **GPS**

- ☑ ★ Include Elevation with Message
- ☑ ◆ Include GPS Coordinates with Message
  - ( ) Create New Waypoint
  - Navigate to Location

#### **OTHER**

- Delete
- ➡ Save
- **⇒** Back

#### **CONTACTS**

- Email Contact
- Mobile Contact
- Group Contact
- **▼** Twitter

#### **SENT MESSAGE STATUS**

- Message Delivered
- Message Failed
- Message Sent to Queue
- Message Sent Delivery Unconfirmed

#### SPOT X DIRECTIONAL PAD

The SPOT X Main Menu screen displays icons/buttons that you can select to send messages, activate navigation, and manage other features. After making an initial selection, sub-menu screens may be displayed.

Use the Directional Pad (Up – Down – Left – Right) to highlight your selection and then press the **Select** button. Use the Back button to cancel or go back to the previous screen.


# S.O.S. S.O.S. LEFT DOWN BACK

#### **SCREEN LOCK**

To prevent the accidental transmission of data, you can enable the screen lock feature on the SPOT X.

#### **KEYBOARD AND DISPLAY BACKLIGHTING**

Press the **Power/Backlight Button** to turn on/off keyboard and screen illumination.

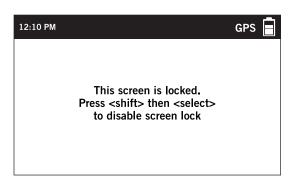


#### SPOT X APP AT A GLANCE

#### CONNECT THE APP WITH SMARTPHONE

- 1. Install the **SPOT X App** from the app store.
- 2. Enable Bluetooth on your mobile device (Spot X's Bluetooth is always discoverable).
- 3. Place the SPOT X and the mobile device within 10 feet (3 meters) of each other.
- 4. Open the SPOT X App.
- 5. Login using your SPOT My Account username & password.
- 6. Select your SPOT X (ex: **SXB2970000**).

#### IMPORTANT SPOT X TIPS

SPOT X needs a clear view of the sky with no obstructions (buildings, roof overhangs, trees, etc.) to obtain a GPS signal to provide the most accurate location information and send messages. SPOT X may not function properly at the bottom of a deep canyon, in a cave, or in very dense woods.

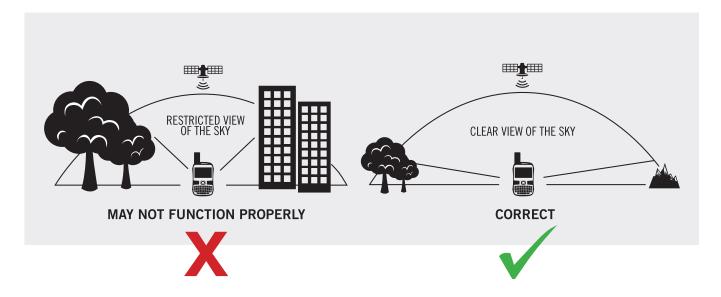

- Orienting SPOT X vertically with the **antenna facing towards the sky** will improve performance as the antenna is located on the top portion of the device.
- Since SPOT X has the ability to receive messages, messages sent from the device can be acknowledged shortening the transmission time.
- Before heading off the grid, we strongly recommend that you send a test message to ensure your device was activated properly. You can view your sent messages in your account at **FindMeSPOT.com/MyAccount**

**NOTE:** If no GPS signal is found the **GPS** will display on the screen. If possible, you should move to a location with a clearer view of the sky. You can check the status of your messages in the message thread.

#### SPOT X OPERATING TEMPERATURES

Prolonged use or storage of your SPOT X in direct sunlight or in a vehicle may cause the device to overheat and/or damage its battery. SPOT X can withstand operating in temperatures of -4F to +140F (-20C to +60C).

#### **CONTACTS**

SPOT X can hold up to 70 contacts and/or contact groups. Contacts can be manually added through the SPOT X or through **SPOT MY ACCOUNT**. If added through **SPOT MY ACCOUNT**, syncing is required using the SPOT X Firmware Updater in order for the contacts to display on the SPOT X.


Contacts supported:

- Mobile Number
- [@ Email
- Contact Groups


#### MANUALLY ADDING A CONTACT

- 1.On the **Main Menu** screen, select **1** to display the contacts list.
- 2. On the **Contacts** screen, select **2** to display the **New Contact** screen
- 3. Enter the required information and select  $\square$  to save the contact to your SPOT X device.

If both **Email** and **SMS/TEXT** fields are filled in, the SPOT X will create two separate contacts, one for each field.

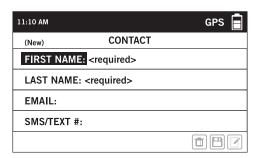


4. Additionally, the sync required icon will appear next to the new contact's name and in the **Status Bar.**This indicates that the SPOT X will need to sync with **SPOT MY ACCOUNT** if you would like the contact to be uploaded to your contact list in **SPOT MY ACCOUNT**.

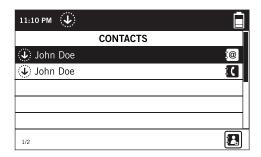

**NOTE:** Contacts can also be saved when typing a message. To do this, select **New SMS Contact or New email Contact**, then enter the information and the will be highlighted. Select the icon and enter the appropriate information and select and press the Select button to save the contact to your SPOT X device.

#### **DELETING A CONTACT**

- 1. On the **Main Menu** screen, select **1** and then scroll down and highlight the contact you want to delete. Press the **Select** button.
- 2. Select to delete the contact and follow the onscreen instructions to remove it from your SPOT X device permanently.
- 3. Additionally, if the SPOT X device had been previously synced with **SPOT My Account** and the contact was present in both locations, once a new sync is performed the deleted contact will be also removed from the contact list in **SPOT My Account**.

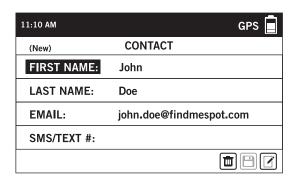



#### 2-WAY MESSAGING

Send and receive 140 character text messages and emails with family and friends from virtually anywhere in the world. SPOT even provides you with your own mobile device number so others can reach you anytime.

#### **CREATE & SEND A MESSAGE**

- 1. On the **Main Menu** screen, select **?** and the message composing screen will be displayed.
- 2. Select **1** to add contacts.

**NOTE:** When sending a message to more than one person, the contacts will have to be added individually.


3. Once you have selected a contact, select the **Message**: field to display the **New Message** screen. Enter a message of up to 140 characters and select **Done**. You can include your **Elevation** and/or **GPS Coordinates** by clicking on the box next to the ★ and ❖ icons.


**NOTE:** The altitude will not be displayed on the device, but the recipient will receive this information. Additionally, the SPOT X does not support displaying altitude from messages.

4. Select ↑ to send your message.

#### OR

1. On the **Main Menu** screen, select and the message composing screen will be displayed. Then follow steps 3-4 from the instructions above.

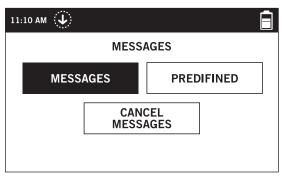

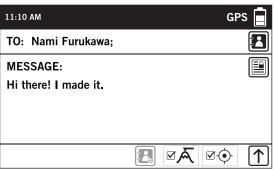



#### PREDEFINED MESSAGES

Make messaging even easier by sending a Predefined Message. These messages can only be edited in your **SPOT MY ACCOUNT** and up to 14 Predefined Messages can be stored on your SPOT X. Syncing SPOT X with your **SPOT MY ACCOUNT** is required for Predefined Messages to appear on your device.

To send a Predefined Message, simply create a new message and select the **Predefined Messages** button 🗉 .

Syncing your SPOT X with SPOT My Account is required for the changes to reside on your SPOT X.

#### **SOCIAL MEDIA**

Link your social media accounts to your SPOT X directly from your SPOT My Account.

Once you've linked your accounts, you will be able to send 140 character updates to those accounts from your SPOT X at any time. Syncing SPOT X with your SPOT account is required for social media to appear as a contact on your device.

Simply create a new message, select **2** to access your contact list, and choose your linked social media as a contact.

#### **VIEWING ALL MESSAGES**

- 1. On the **Main Menu** screen, select to display the main Messages screen, then select **Messages** to view all of your message threads.
- 2. Highlight and select the message thread you wish to open.



#### **VIEWING INDIVIDUAL MESSAGES**

To view the entire message, highlight and select the message you want to see.



#### **DELETING INDIVIDUAL MESSAGE THREADS**

To delete the individual message thread, go to the thread and select **u** and follow the onscreen instructions.

#### **REPLYING TO A MESSAGE**

To reply to the message, go to the thread and select .


#### **CHECK IN**

Check In with friends and family by quickly sending a pre-programmed message and/or email along with your GPS coordinates. The Check In message will include a link to Google Maps<sup>TM</sup> showing the SPOT X's location. Make sure you set up this feature before you go off the grid.

The Check In message can be edited and assigned to contacts via **SPOT MY ACCOUNT** at any time.

#### SENDING A CHECK IN MESSAGE


On the **Main Menu**, select  $\heartsuit$  and the pre-programmed message created in **SPOT MY ACCOUNT** will automatically be sent to the pre-assigned contacts in your Check In contact list.

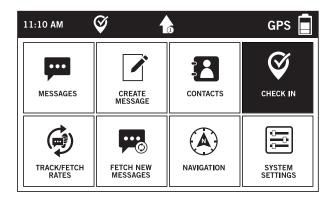

#### HOW TO VIEW YOUR SENT CHECK IN MESSAGES

- On the Main Menu screen, select to display the Message screen, and then select Messages.
- 2. On the list of messages, select the **Check In**.
- 3. Select the **Check In** message you would like to view.

**NOTE:** The Check-In Message will not display the texts sent, but only the GPS coordinates and date/time it was sent.

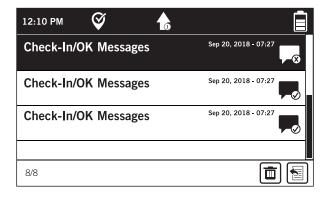

#### **CANCEL MESSAGES**

Cancels all outbound Check In and other messages that are queued up.

- 1. On the **Main Menu** screen, select **and** then select **Cancel Messages**.
- 2. A message will be displayed asking if you want to cancel all pending outbound messages. Select **Yes** or **No**.

#### SPOT S.O.V. (SAVE OUR VEHICLE)

SPOT S.O.V. can be used during non-life threatening situations and allows you to send 2-Way text messages to Nation Safe Drivers. SPOT S.O.V. services provided by Nation Safe Drivers, are only available to subscribing customers in the U.S., Puerto Rico, Washington, D.C. and Canada. Visit **FindMeSPOT.com/SPOTSOV** to learn more.


#### **INITIATING SPOT S.O.V.**

If Nation Safe Drivers service was added to the plan, this contact will automatically be listed under the SPOT X contact list.

- 1. On the **Main Menu** screen select **w** to display the main Message screen, then select **Messages**.
- 2. Select .
- 3. Select Nation Safe Drivers from your contact list.
- 4. Select the **Message** field to display the New Text screen. From here you can choose to create a new message. Select **Done** to continue.
- 5. Include your Elevation by checking next to  $\square \bigwedge$  and/or include your GPS Coordinates by checking next  $\square \bigoplus$ .
- 6. Select  $\uparrow$  to send your message.

#### OR

1. On the **Main Menu** screen select and the message composing screen will be displayed. Then follow steps 3-6 from the instructions above.

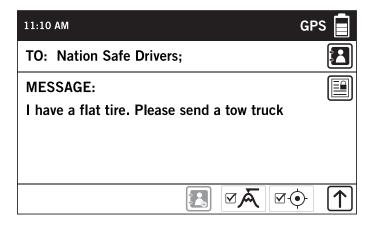

# IMPORTANT NOTICE: S.O.S. MODE SHOULD ONLY BE USED DURING LIFE THREATENING EMERGENCIES. SENDING FALSE S.O.S. MESSAGES MAY SUBJECT YOU TO LIABILITY FOR ADDITIONAL CHARGES.


Activate the S.O.S. mode to begin communicating and sending alerts directly to GEOS International Emergency Response Coordination Center (IERCC). GEOS IERCC will notify the appropriate emergency responders based on the SPOT X's GPS location and your emergency situation. Responders may include local police, Coast Guard, or Search and Rescue teams. For full details about GEOS IERCC, please visit **FindMeSPOT.com/GEOS** 

#### **INITIATING S.O.S.**

- 1. Power on device, lift cover, long press the S.O.S. button for 3 seconds or until S.O.S. screen is displayed, and follow the onscreen instructions.
- 2. The **S.O.S.** icon should appear on the **Status Bar** to indicate that S.O.S. has been initiated.




- 3. Once S.O.S. is initiated, GEOS IERCC will be notified of your emergency. SPOT will continuously send S.O.S. notifications with your GPS position to GEOS IERCC every 5 minutes until S.O.S. is cancelled or the SPOT X is powered off.
- 4. SPOT X will then allow you to communicate 2-Way, via message, with GEOS IERCC by selecting the **Text GEOS** button

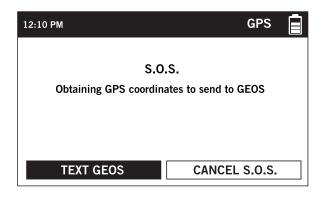

- 5. Upon activating S.O.S., the device will terminate all previously queued messages waiting to be transmitted as well as Navigation, Check In, and Tracking if active. The SPOT X device will be locked down on S.O.S. Mode and you will not be able to send messages to anyone other than GEOS IERCC until S.O.S. is cancelled.
- 6. While S.O.S. is active, the SPOT X should remain outside in clear view of the sky with no obstructions in order to maintain network connectivity.

#### **CANCELLING S.O.S.**

Lift cover, long press the S.O.S. button for 3 seconds and follow the onscreen instructions, or select Cancel S.O.S. from the S.O.S. screen.

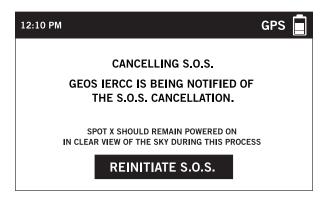


#### **TRACKING**


With SPOT X, your friends and family can track your progress in near real-time using **SPOT Share Page** with Google Maps<sup>TM</sup> giving them a virtual breadcrumb trail of your adventure.

#### SELECTING A TRACKING INTERVAL

The SPOT X default tracking interval is 10 minutes. Depending upon your service plan, you can select from tracking intervals of 2½, 5, 10, 30, or 60 minutes.

On the **Main Menu**, select , then scroll to and select **Current Tracking Interval** and choose from the list of available intervals. All non-subscribed tracking intervals will be grayed out.

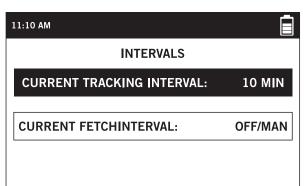


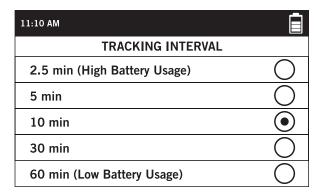

#### INITIATING TRACKING

1. Power on the SPOT X and long pressthe Track button on the SPOT X device for 3 seconds or until the tracking icon appears in the **Status Bar**.



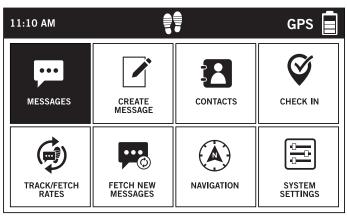

- 2. Once your GPS position is acquired, SPOT X will send your tracks in accordance with the tracking interval you have selected until you manually stop tracking, the SPOT X detects no movement, or you power off the SPOT X device.
- 3. While Tracking is active, SPOT X should remain outside in clear view of the sky with no obstructions in order to maintain network connectivity.

#### **CANCELLING TRACKING**

Long press the Track button on the device for 3 seconds and the track icon will disappear from the **Status Bar.** 



#### SUSPENDED TRACKING MODE

SPOT X only sends tracks when Tracking mode is active and the device is moving. When the device is stationary for more than **5** minutes, SPOT X will enter **Suspended Tracking** mode and you will see in the **Status Bar**.

SPOT X will automatically send one more track from your resting location. While at rest, SPOT X will not send tracks. Tracking will automatically resume after the accelerometer detects the unit has begun moving again.


#### MESSAGE FETCHING


Every time SPOT X sends a track and/or a message, SPOT X will also retrieve and download any incoming messages. When you're not Tracking or sending a message, the Message Fetching function will check for messages for you.

#### SELECTING A MESSAGE FETCHING INTERVAL

The SPOT X default message fetching interval is Off/Manual Fetching. Depending upon your service plan, you can select from fetching intervals of 2½, 5, 10, 30, 60 minutes, 4 hrs, 24 hrs, or Off/Manual fetching.


On the **Main Menu**, select **@**, then scroll to and select **Current Fetch Interval** and choose from the list of available intervals. All non-subscribed fetching intervals will be grayed out.

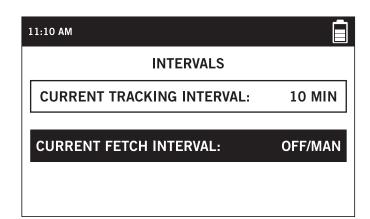

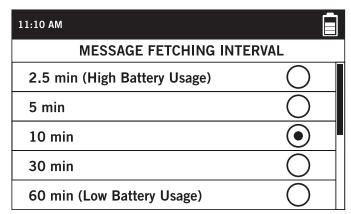

#### MANUALLY FETCHING NEW MESSAGES

To manually check for new incoming messages, simply select from the **Main Menu** screen. If any new incoming messages are received, will be displayed in the **Status Bar** letting you know how many new messages are waiting for you.

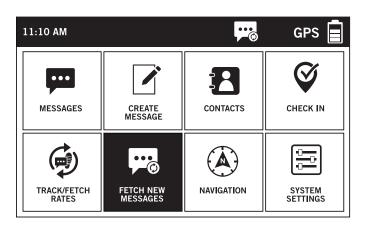


#### **NAVIGATION**

SPOT X has a built-in compass that comes with several navigational features and trip information to help you navigate.

To access the **Compass** from the **Main Menu** screen, select (A) followed by **Compass**.



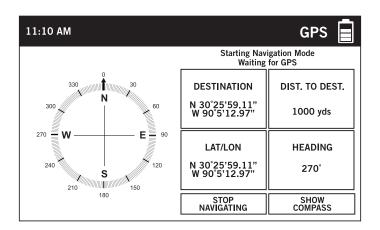

#### **CALIBRATING THE COMPASS**

Your SPOT X uses a Digital Compass to give accurate Heading and Bearing information. The SPOT X automatically checks compass calibration and will tell you to calibrate when necessary.

- 1. On the **Main Menu**, select **(A)** then select **Settings** and scroll to and select the **Calibrate Compass** button.
- 2. The **Calibrate Compass** screen will be displayed. Select **Start Calibration** to begin and follow the onscreen instructions.

**NOTE:** Use the figure 8 movement to calibrate the unit.


#### TRIP INFORMATION DATA FIELDS

The SPOT X Compass screen is able to display four Trip Info Data Fields at a time. Each data field can be easily configured and changed by selecting from seven different choices:

- Location (Lat/Lon)
- Destination (Lat/Lon)
- Distance to Destination
- Heading
- Bearing
- Course
- Elevation
- Speed

#### CONFIGURING TRIP INFORMATION DATA FIELDS

- 1. On the **Compass** screen, select Trip Info. If a calibration has never been done before, the **Calibrate Compass** screen will be displayed. Select **Start Calibration** to begin and follow the onscreen instructions.
- 2. Using the **Navigation Pad**, highlight and select the Data Field you wish to change.
- 3. The **Trip Info Data Field** screen will be displayed. Highlight and select the appropriate navigational data you wish to be displayed in that field.

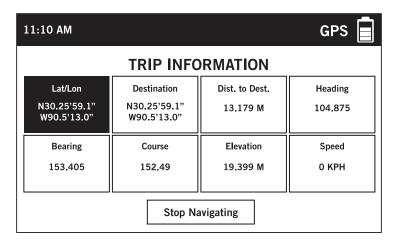

#### **WAYPOINTS**


SPOT X allows you to designate important locations and landmarks as Waypoints on your device and navigate to them.


#### CREATING A WAYPOINT

1. On the **Main Menu** screen, select **(A)** then select **Waypoint** followed by **(D)** to create a new waypoint.

#### 2. Select either:

- Current Location creates a new waypoint based on the current GPS coordinates of the SPOT X
- Create Waypoint creates a new waypoint by manually entering GPS coordinates
- The Waypoint screen will be displayed. If Current Location was selected, the Location field will input the
  current GPS coordinates automatically. If Create Waypoint was selected, the GPS coordinates will have to be
  input manually.

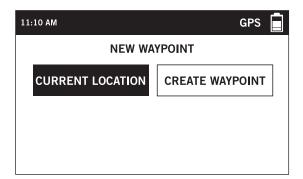

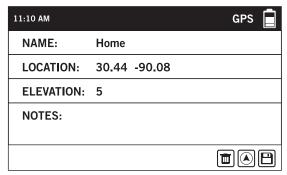

- 3. To change the name of a waypoint, enter your selected waypoint name in the **Waypoint Name** field.
- 4. Selecting the **Notes** field will display the **Waypoint Notes** screen allowing you to enter up to 300 characters. Select **DONE** to save the notes.
- 5. When finished, select  $\square$  to save the waypoint.

#### **NAVIGATING TO A WAYPOINT**

1. On the **Main Menu** screen, select **(A)** then select **Waypoint** and chose the specific waypoint you'd like to travel towards.

**NOTE:** For best results, while navigating, hold the SPOT X with the antenna at about a 135 degree angle.

- 2. The selected **Waypoint** screen will be displayed. Select the **Navigate To** button.
- 3. The **Compass** screen will appear displaying the Compass and the following Data Fields:
  - **Destination** with the selected Waypoint coordinates
  - **Distance to Destination** in a straight line
  - Lat/Lon current GPS location
  - Course direction towards selected Waypoint


#### SYSTEM SETTINGS

From the System Settings screen, you can manage all different aspects of your SPOT X device from viewing your data usage to selecting your preferred language.

#### **VIEWING DATA USAGE**

The Data Usage screen allows you to monitor your SPOT X data usage and your SPOT X Service Plan details.

On the **Main Menu** screen, select then scroll to and select **Data Usage**.

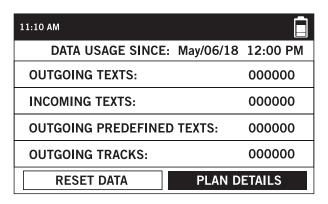

The **Data Usage** screen displays the following:


- Total messages sent since the last data reset
- Total incoming messages since the last data reset
- Total outgoing predefined Messages
- Total outgoing tracks since the last data reset

Selecting the **Reset Data** button will erase and reset all counters to zero.

#### **VIEWING SERVICE PLAN DETAILS**

Selecting Plan Details allows you to see the Service Plan Details screen displaying the following:


- Current SPOT X Service Plan name
- The number of Free Predefined Messages
- The number of included messages for the active SPOT X Service Plan
- The minimum tracking interval for the active SPOT X Service Plan
- The cost per message you will be charged if you go over your allotted messages

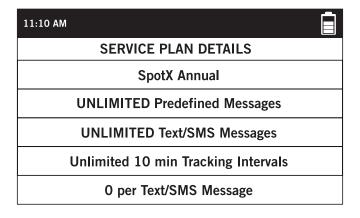

#### LANGUAGE SETTINGS

You can change the language setting on your SPOT X to one of the following:

- English
- Español
- Français
- Portuguêse
- Italiano
- Deutsch

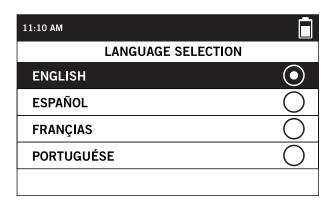



#### TIME AND DATE SETTINGS


The Time/Date Settings screen allows you to configure how the time and date are displayed on your SPOT X device.


Select **Time Format** and choose between 12 hour or 24 hour format.

Select **Set Time/Date** to manually set the time and date displayed on your SPOT X device.

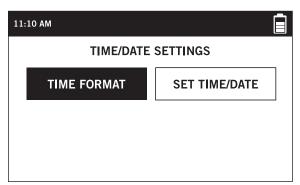

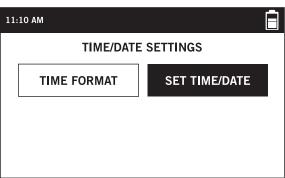

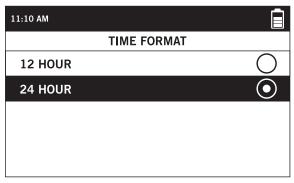


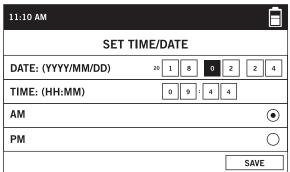

#### **DISTANCE UNIT SETTINGS**

The Distance Unit screen allows you to configure the SPOT X display measurements by selecting from the follow options:


- Metric (Meters)
- Imperial/US (Feet)
- Nautical

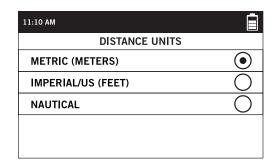



#### **DISPLAY SETTINGS**

The Display Settings screen allows you to configure the SPOT X to turn on or turn off the Poor Sky View Warning, Antenna Position Warning as well as Invert Display.

- The Poor Sky View Warning: The warning will be displayed when there are incoming messages that are not fully received after 5 minutes.
- Antenna Position Warning: The warning will be displayed when the SPOT X is not being held upright.
- Invert Screen Display: This function will switch the background to black and the white text.







#### SPOT X INFORMATION

The **SPOT X Information** screen allows you to see the following SPOT X information:

- SPOT X Unique Mobile Device Number
- ESN
- Auth Code
- Firmware Version
- Date of last My ACCOUNT Sync

# SPOTX INFORMATION MDN: 12544601271 ESN: 0-2901462 AUTH CODE: 1111 FIRMWARE: 00002A-001003-010017-000010 LAST SYNC: 2018-05-04 8:00:00

#### **RESTORE FACTORY SETTINGS**

The **Restore Factory Settings** screen resets the SPOT X to its default factory settings.

**NOTE:** Resetting the SPOT X to the out-of-the-box Factory Settings will erase all data on the SPOT X including all contacts, account information, waypoints, and message threads.

#### **DEMO/RETAIL MODE**

Enabling Demo/Retail Mode causes the SPOT X to display preset marketing images when the device is powered off.

#### **REGULATORY INFO**

The Regulatory Information shows the manufacturer, model and certifications.

#### SOUNDS

This screen will allow you to turn on or off incoming message sounds.

#### **SPOT MY ACCOUNT**

Your **My Account** website is a quick and easy way to configure SPOT X. From My Account you can access the following:

- Getting Started
- My Devices
  - ► Enable/Disable Movement Alerts
  - Duplicate SPOT X Settings
  - Edit S.O.S. Emergency Contacts
  - Create and Manage Contacts
  - ► Configure Help/SPOT Assist
  - ► Configure Social Media Accounts
  - ► Configure Message Blocker
  - Create and Edit Predefined Messages
  - Configure Check In/OK
  - ► Enable/Disable Undelivered Message Notifications
- My Locations
- Share
- · Setting & Billing

#### **MY ACCOUNT - MY DEVICES**

#### SPOT X MY DEVICES OVERVIEW

- Device Type Displays the SPOT device type, i.e. SPOT X
- 2 Renewal Date Displays the date the SPOT X Service plan will automatically be renewed
- 3 ESN Displays Electronic Serial Number that identifies the SPOT X
- 4 Auth Code Displays Authorization Code for the SPOT X
- **Mobile Device Number** Displays telephone number assigned to the SPOT X
- 6 Services Displays all of the services that are associated with the current SPOT X Service plan
- **Text Messages Used** Displays the total number of text messages sent/received, and the number of text messages allowed for the current SPOT X Service plan (red numbers indicate overages)
- Date of Last Sync Displays the date the last time the SPOT X was synced with My Account



- **Device Name Tab** Used to change the name of the SPOT X
- Tracking Tab Displays the tracking interval available in accordance with the current SPOT X Service plan
- **Movement Alerts Tab** Used to Enable/Disable and configure Movement Alert Messages
- **Third Party GPS Forwarding Tab** Used to Enable/Disable and configure the forwarding of your coordinates to a 3rd party application or web service
- Duplicate Settings Tab Used to copy Contact, Message Profiles and Navigation settings between SPOT X devices on the same account
- S.O.S. Tab Used to change Primary and Secondary Emergency Contact information
- My Contacts Tab Used to create contacts and contact groups SPOT X can have up to 70 contacts residing on the device
- **SPOT S.O.V. Tab** Used to edit your S.O.V. contact phone numbers
- **Social Media Tab** Used to link the SPOT X to social media accounts
- Message Blocker Tab Used to control who can send messages to the SPOT X Defaults to Accept All
- Predefined Messages Tab Used to create predefined messages that can be sent at no cost from the SPOT X
   Up to 14 predefined messages can be stored on the SPOT X
- Check In Tab Used to create and configure a free message to be sent to up to 10 recipients when Check In/ OK is selected on the SPOT X
- 21 Undelivered Message Notification Tab Used to enable/disable undelivered message notifications If the SPOT X is turned off, incoming messages will not be delivered, enabling this feature will send an email notification allowing for the viewing of these messages
- Waypoints Tab Used to create and edit waypoints to easily sync to the SPOT X

#### **DEVICE NAME TAB**

Give a unique name to the SPOT X. For accounts with multiple SPOT X's or other SPOT devices, giving a unique name to the device will make it easier to identify and select the SPOT X.

Simply enter a new name in the **Name** field and select **Save**.

