

Safety 1st[®]


So Close Crib Monitor

08036

User Guide

Questions? Comments?
Missing Parts? Contact Us:

www.safety1st.com
(800) 544-1108

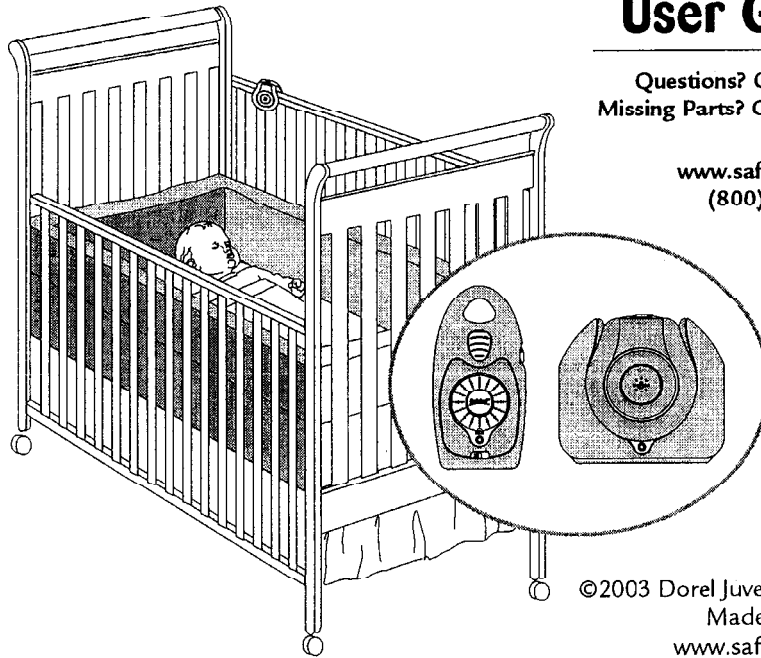

©2003 Dorel Juvenile Group

Made in CHINA

www.safety1st.com

(800) 544-1108

Styles and colors may vary.

Distributed by Dorel Juvenile Group, Inc.,

2525 State Street,

Columbus, IN 47201-7494

In Canada: 12345 Albert-Hudon, Suite 100,

Montreal-N, QC Canada H1G 3K9

11/03

WARNING

PLEASE READ THE FOLLOWING WARNINGS AND ALL ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE USING THE SO CLOSE CRIB MONITOR. KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.

TERMS USED IN WARNINGS: The term "Receiver" corresponds to "Parent's Unit" and the term "Transmitter" corresponds to "Baby's Unit" in the rest of this instruction booklet.

- The So Close Crib Monitor is not intended to replace responsible and proper parental supervision.
- Check your child's activity at regular intervals as this monitor will not alert parents to the silent activities of a child.
- Before using your So Close Crib Monitor:
 - Read and follow all instructions carefully.
 - Read and observe all warnings on the product and in this instruction booklet.
- To prevent entanglement with the adapter cord, **NEVER** place the cord in or near a crib or playpen. **DO NOT** place the Recharging Base anywhere its AC adapter cord could be within reach of children.
- **ALWAYS** KEEP THE RECHARGING BASE, TRANSMITTER, RECEIVER AND AC ADAPTERS OUT OF REACH OF CHILDREN.
- This product is not intended to be used as a medical monitor and its use should not replace adult supervision.
- It is essential to check reception regularly. Please see the Testing Reception section for complete instructions.
- The Recharging Base is intended for indoor use only.
- **NEVER** use the Recharging Base, Transmitter or Receiver near water. For example, do not use near a bathtub, bathroom sink, laundry tub, kitchen sink, in a wet basement, etc.
- Always unplug the AC adapters from wall outlets during long periods of non-use.
- Position the Recharging Base, Transmitter, Receiver and AC adapters to allow adequate ventilation and prevent these components from overheating.
- To prevent overheating, keep the Recharging Base, Transmitter, Receiver and AC adapters away from heat sources such as radiators, heat registers, stoves or other appliances (including amplifiers) which produce heat. Also keep these components out of direct sunlight.
- Use only the AC adapters provided. Use of any other adapters may damage the Recharging Base and/or Receiver. Plug the AC adapters into standard household current only (120V AC outlet)! To prevent entanglement and overheating, **DO NOT** use extension cords.
- The AC adapters may become slightly warm to the touch during operation. This is normal.
- Position the AC adapter cords so that they are not walked on or pinched by items placed upon or against them, paying particular attention to cords at AC adapter plugs, wall plugs, and the point at which the cords attach to the Transmitter and Receiver.

- This product should be serviced only by qualified service personnel at Dorel Juvenile Group when:
 - An AC adapter or its plug is damaged,
 - The Recharging Base, Transmitter or Receiver are dropped,
 - Liquid has spilled into the Transmitter or Receiver or
 - The Recharging Base, Transmitter or Receiver do not appear to operate normally or exhibit a marked change in performance
- **DO NOT** attempt to service this product beyond that described in the Troubleshooting section at the end of these instructions. All other servicing should be referred to qualified personnel at Dorel Juvenile Group.

NOTE: The LEDs emit IR (infra red) light that is not harmful.

CAUTION

TO REDUCE THE RISK OF ELECTRICAL SHOCK, DO NOT REMOVE COVER OR BACK OF TRANSMITTER. NO SERVICEABLE PARTS INSIDE. REFER SERVICING TO DOREL JUVENILE GROUP CONSUMER RELATIONS (800) 544-1108.

WARNING

TO REDUCE THE RISK OF FIRE OR ELECTRICAL SHOCK, DO NOT EXPOSE THIS PRODUCT TO WATER OR MOISTURE. NEVER ATTEMPT TO OPEN THE CASE OF THE TRANSMITTER. THIS IS DANGEROUS AND WILL VOID THE WARRANTY.

FCC Information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RADIO AND TELEVISION INTERFERENCE


This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes and Modifications not expressly approved by the manufacturer or registrant of this equipment can void your authority to operate this equipment under Federal Communications Commissions rules.

WARNING: Changes or modifications to this unit not expressly approved by Dorel Juvenile Group could void the user's authority to use the equipment.

Features and Components

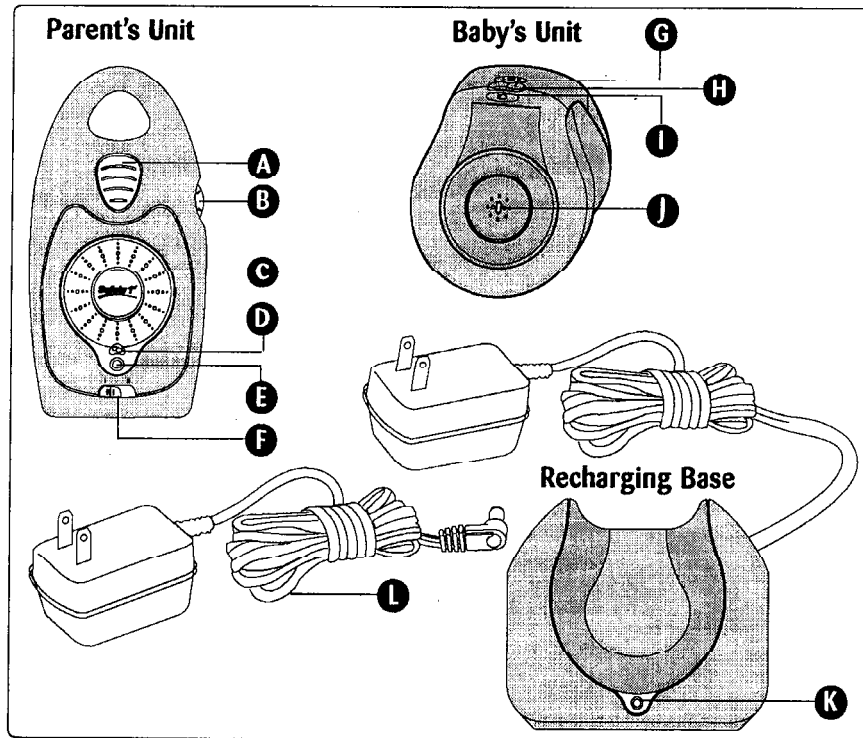

- | | |
|-----------------------------------------|--------------------------------|
| A Secure Sound Lights | G Power On Indicator |
| B On/Off Volume Control | H Channel Selector |
| C Speaker | I Low Battery Indicator |
| D Range Indicator | J Microphone |
| E Power On/Low Battery Indicator | K Recharging LED |
| F Channel Selector | L AC Adapter |

Keep These Instructions for Future Use

- Lay out and identify all parts.
- Do not return this product to the place of purchase. If any parts are missing, or if you are having difficulty using product visit our web site at www.safety1st.com. Or call Consumer Relations at (800) 544-1108. Have the model number (08036) and date code (manufacturing date) ready before you call. The date code is located on the bottom of the Parent's Unit and on the back of the Recharging Base.

Installing Your So Close Crib Monitor

⚠ WARNING


- To prevent entanglement, only mount the Recharging Base in a location where it and its AC adapter cord are **OUT OF REACH OF CHILDREN**.
- **DO NOT** mount the Baby's Unit or Recharging Base directly above heating vents, other heat producing sources or in direct sunlight.
- To prevent entanglement and overheating, **NEVER** use an extension cord.

To Charge the Unit:

IMPORTANT: You will need to fully charge the Baby's Unit **BEFORE THE FIRST USE** and approximately every 48 hours of use.

1. Locate the Recharging Base. Connect the AC adapter into a power outlet.
2. Place the Baby's Unit as shown onto the Recharging Base. A green LED will illuminate, showing that the Baby's Unit is connected and charging (Figure 1). (**NOTE:** If the Baby's Unit is on backwards, the LED will not illuminate.) It takes approximately 8 hours to fully charge.
3. After the Baby's Unit is fully charged, place on crib, bassinet, or playard as desired. Baby's Unit may also be used as traditional monitor, by setting Baby's Unit on Recharging Base.

NOTE: When charging, it doesn't matter what setting the Baby's Unit is on (channel I, channel II or off).

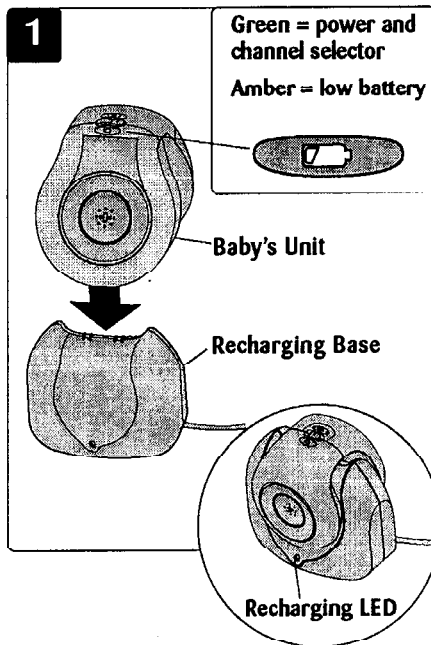

Installing Your So Close Crib Monitor

To Set Up the Parent's Unit:

CAUTION

- When using batteries, check batteries regularly. Amber LED indicates the batteries are low. **DO NOT** rely on Parent's Unit when batteries are low.


NOTE: The Parent's Unit may use either the AC adapter or batteries. When plugged in, the AC adapter will be the source of power.

4. **For AC Power Use:** Locate the Parent's Unit and its AC adapter. Connect the AC adapter into the side of the Parent's Unit. Connect the AC adapter into a power outlet (Figure 2).

CAUTION: DO NOT use an adapter that did not come with this product.

For Battery Use: Locate the center screw at the back of the Parent's Unit. Unscrew the screw. Pull off the battery door and insert three AAA batteries (see positive and negative diagram on the Parent's Unit). Secure the door with the screw (Figure 2).

NOTE: If desired, slide the belt clip over your belt.

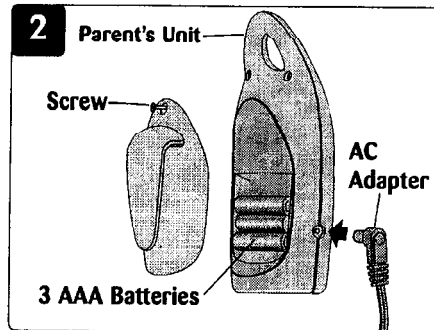

Choose a Location:


IMPORTANT: When choosing a location to set up your Baby's Unit and Parent's Unit follow these guidelines:

- For safety, place the Baby's Unit 4 to 6' (1.5 to 2 m) away from the crib.
- The Baby's Unit can be placed on the crib rail or the Recharging Base.
- Use the Parent's Unit far enough away from the Baby's Unit so as not to get feedback.
- During use of the monitor, if the sound quality deteriorates you may be reaching the limits of the monitor's range. If this happens, you will need to move the Parent's Unit in closer proximity to the Baby's Unit.

Operating Your So Close Crib Monitor

To Use the Baby's Unit and Parent's Unit:


5. Turn the Parent's Unit to the On position. Choose a channel. Be sure that the same channel is selected on both the Baby's Unit and the Parent's Unit (Figure 3). Check the battery LED on the Baby's Unit to be sure the unit is charged. If the Low Battery LED is illuminated amber, you need to recharge the Baby's Unit.

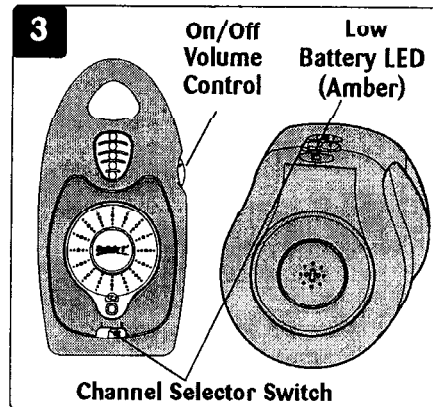

6. Place the charged Baby's Unit on a crib rail, playard or bassinet near the baby (Figure 4). Press down gently until it latches on to the rail. Pull up to be sure it is securely latched.


CAUTION

- Possible entanglement injury. Keep out of baby's reach. Remove Baby's Unit from crib or playpen when baby begins to push up on hands and knees.
- Do not add additional strings or straps to attach to crib.

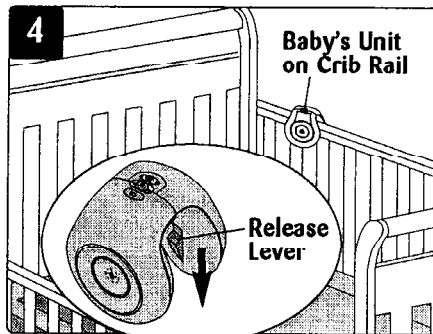

NOTE: To remove Baby's Unit from rail, depress the inside Release Lever with your finger and pull the Baby's Unit off the rail.

7. Adjust the volume by turning the knob on the side of the Parent's Unit (Figure 5).

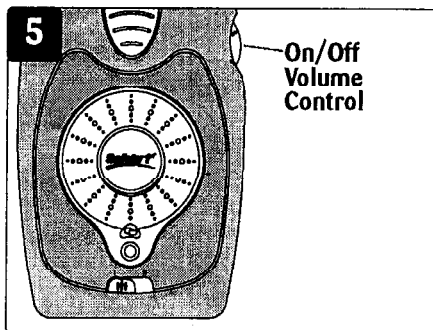

Range Indicator Feature:

8. The Range Indicator feature on the Parent's Unit lets the parent know the quality of the connection between the Parent's and Baby's Units. If the indicator is green, there is a good connection. If the indicator is red, there is a poor connection.

Operating Your So Close Crib Monitor

Secure Sound Lights:

9. The 5 sound lights on the Parent's Unit indicate the sound level of the baby. The more noise your baby makes, the more sound lights will illuminate.

CAUTION: Test the Parent's Unit before each use. It is essential to check reception regularly.

IMPORTANT: The first time you use your Baby's Unit, go through the section "To Test the Reception" with two adults.

To Test the Reception:

10. Place the Baby's Unit on the crib rail (or other comparable location). Have an adult speak into the Baby's Unit at various levels (soft to loud) while another adult checks the Parent's Unit for the proper sound and reception. Try the Parent's Unit in every location that it will be used. It is best to follow these guidelines for good reception:

Guidelines for good reception:

- The Baby's Unit should be placed on the crib rail close to the baby.
- Be certain the Parent's Unit and Baby's Unit are set on the same channel.
- If being used as a traditional monitor, (Baby's Unit on Recharging Base), set unit 4 to 6' (1.5 to 2m) away from baby.
- Check reception regularly by following Step 10 above.
- Adjust the volume to a comfortable level for your environment.
- Use the Parent's Unit far enough away from the Baby's Unit so as not to get feedback.
- During use of the monitor, if the sound quality deteriorates you may be reaching the limits of the monitor's range. If this happens, you will need to move the Parent's Unit in closer proximity to the Baby's Unit.
- If one channel has poor reception try the other channel.

NOTE: It is possible for the Parent's Unit to pick up sounds or interference from other signal producing devices including other audio or video monitors which broadcast in the 900 MHz range. To minimize this potential problem, two independent channels have been provided.

If you experience interference while using one channel setting, simply switch the Parent's Unit and Baby's Unit to another channel. Selecting a channel is usually a one-time adjustment. If interference persists on both channels, please refer to the Troubleshooting section at the end of these instructions.

CAUTION: To protect your privacy, always turn the Baby's Unit off when not in use. Always remember that you are using public airwaves. Sound may be broadcast to other receiving devices. Conversations, even from rooms near by, may be broadcast.

WARNING: Once your child can stand in the crib, take the Baby's Unit out of the crib, playard or bassinet and use as a traditional monitor by attaching the Baby's Unit to the Recharging Base.

Troubleshooting

Problem	Possible Cause	Solution
Parent's Unit's power indicator does not illuminate	Parent's Unit is not turned on	Slide the button on the side of Parent's Unit to the on position
	Batteries are dead/ Power is turned off	Make certain that any light switches that control the power flow to the wall outlet are on (when using AC) Make certain that house fuses and circuit breakers are on (when using AC)
	AC Adapter not properly connected	Check AC Adapter jack-to-socket and plug-to-outlet connections
Parent's Unit has no sound or static	Volume not turned up	Adjust the volume control on the Parent's Unit
	Channel switches are not on the same setting (I or II)	Check the channel switches on the Baby's Unit and Parent's Unit to confirm they are on the same channel (I or II)
	Signal interference due to monitors, cellular or cordless telephones, etc.	Try the other channel Turn the Baby's Unit and Parent's Unit off, wait a moment then turn them back on
	Out of range	Bring Parent's Unit unit closer to Baby's Unit
Audio feedback (squealing)	Baby's Unit is too close to the Parent's Unit	Move the Baby's Unit further away from the Parent's Unit
		Lower the volume on the Parent's Unit
Parent's Unit not functioning or static or power LED is amber	Batteries are low	If amber LED lights or no LED at all, change the batteries
	Wrong AC adapter used	If you are not using batteries, be certain that you are using the correct AC adapter
	Not within range	Move closer to the Baby's Unit
Baby's Unit not functioning or power LED is amber	Batteries are low	If amber LED lights or no LED at all, change the batteries
	Not within range	Bring Parent's Unit unit closer to Baby's Unit

NOTE: Do not return this product to the place of purchase. If you are having difficulty using product visit our web site at www.safety1st.com or contact Consumer Relations at (800) 544-1108.

One-Year Limited Warranty

Dorel Juvenile Group, Inc. warrants to the original purchaser that this product (So Close Crib Monitor), is free from material and workmanship defects when used under normal conditions for a period of one (1) year from the date of purchase. Should the product contain defects in material or workmanship Dorel Juvenile Group, Inc., will repair or replace the product, at our option, free of charge. Purchaser will be responsible for all costs associated with packaging and shipping the product to Dorel Juvenile Group Consumer Relations Department at the address noted on the front page of this document and all other freight or insurance costs associated with the return. Dorel Juvenile Group will bear the cost of shipping the repaired or replaced product to the purchaser. Product should be returned in its original package accompanied by a proof of purchase, either a sales receipt or other proof that the product is within the warranty period. This warranty is void if the owner repairs or modifies the product or the product has been damaged as a result of misuse.

This warranty excludes any liability other than that expressly stated previously, including but not limited to, any incidental or consequential damages.

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS THAT MAY VARY FROM STATE TO STATE.