

PACKAGE CONTENTS

- Bluetooth earpods
- USB charging cable
- Quick Setup Guide



FIND YOUR USER GUIDE ONLINE!


Go to www.insigniaproducts.com, then click **Support & Service**. Enter **NS-CAHBTEP01** in the box under *Manual, Firmware, Drivers & Product Information*, then click ►.

FEATURES

- Bluetooth 4.1
- Inline control, built in mic
- **Up to six hours** battery life for music playback
- MicroUSB charging

CHARGING YOUR EARPODS

- **When the red indicator LED blinks three times a second, the battery is low.** To charge the battery, plug the microUSB charging cable into your computer and into the microUSB port on your earpods. The red LED turns on to indicate that the battery is charging and turns off when fully charged.

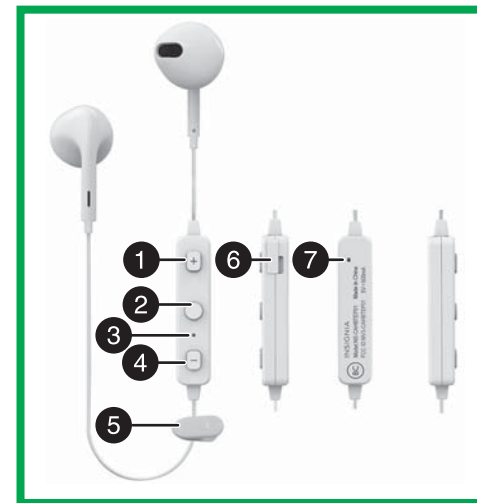

USING YOUR EARPODS

Turning your earpods on and off

- 1 Place the earpod cable around your neck, then clip the cable clamp to your collar. The inline control falls naturally in front of your right shoulder.
- 2 Press and hold the **MFB** for three seconds. The LED blinks blue (when turned on) or red (when turned off) and the voice prompt says "Power on", or "Power off."

#	DESCRIPTION	FUNCTION
1	+ Volume Up Next Track	Press + to increase the volume. Press + to skip to the next track.
2	Multi-function Button (MFB) (Power/Talk/Play/ Pause/Pairing)	Press to turn on your earpods. If you receive a phone call, press to talk. Press to turn off your earpods.
3	Indicator LED	Shows the current status of the earpods.
4	- Volume Down Previous Track	Press - to decrease the volume. Press - to skip to the previous track.
5	Cable clamp	Use to clamp the cable to your collar.
6	Micro USB port	Plug the micro USB connector into this port to charge your earpods.
7	Microphone	Allows you to talk on the telephone.

BLUETOOTH BASIC INDICATION

Bluetooth function indication

ACTION	OPERATION	LED INDICATION	SOUND
Power on	Press and hold MFB more than two seconds	Blue LED on 1.5 seconds	"power on"
Power off	Press and hold MFB more than three seconds	Red LED on 1.5 seconds	"power off"
Pairing mode	Press and hold MFB more than four seconds in power off mode	Blue and red LED blinking alternately	Two short beeps
Play/Pause	Press and release MFB button		
Volume Up/Down	Press and release + / - button		Two high beeps for maximum volume. Two low beeps for minimum volume
Next Track/Previous Track	Press and hold + / - button		
Incoming call		Blue LED blinks three times every five seconds when a call is received	Ring tones
Answer call	Press and release MFB when a call is incoming		One short beep
Reject call	Press and hold MFB when a call is incoming		One long beep
Redial	Double press MFB		Two short beeps
Reset device list	Press and hold MFB more than 10 seconds in power off mode	All LEDs turn off	

PAIRING YOUR EARPODS

Notes:

- Range is 33 feet (10 meters)
- Supports easy pairing
- Prompts you by saying "**Device Connected**," when connected
- Supports a battery indicator icon on an iOS device

Pairing with a cell phone or MP3 player

- 1 With your earpods turned off, press and hold **MFB** for four seconds. The blue and red LEDs blink alternately.
- 2 On your phone or MP3 player, select **INSIGNIA NS-CAHBTEP01** from the list of discovered devices, then enter the password **0000** (four zeros) (if required) to pair your earpods.
For more information on pairing Bluetooth devices to your cell phone or MP3 player, see the device's documentation.

Note: After the earpods have been successfully paired with the cell phone or MP3 player, the earpods will automatically reconnect to the phone or MP3 player.

Pairing with a computer running Windows

Note: Before you pair the earpods with the computer, make sure that the computer is equipped with Bluetooth. Refer to the computer's documentation or contact the computer manufacturer for more information. If your computer is not Bluetooth compatible, install a Bluetooth USB adapter (dongle).

- 1 Turn on Bluetooth on the computer. For instructions, see the computer's documentation or contact the computer manufacturer.
- 2 Double-click the **Bluetooth** icon in the system tray, then click **Add a device (Add Wireless Device)** using Windows Vista).
- 3 With the earpods turned off, press and hold **MFB** for four seconds. The LED blinks blue and red alternately. Pairing mode is activated.
- 4 Double-click the **INSIGNIA NS-CAHBTEP01** icon on the computer or highlight the icon, then click **Next**.
Note: If you are unable to locate the **INSIGNIA NS-CAHBTEP01** icon, click the **Search Again** button.
- 5 If required, enter **0000** (four zeros) in the **Bluetooth security code** field, then click **Next**.
- 6 After the earpods have been paired, click **Close**. If you are using Windows XP, continue with steps 7 through 9.
- 7 Select one of the Bluetooth hands-free types shown on the *Add a Bluetooth Device Wizard* screen, then click **Next**.
- 8 Select the services shown on the wizard screen to use with your Bluetooth earpods, then click **Finish**.

- 9 To connect the device, double-click the **INSIGNIA NS-CAHBTEP01 Hands-Free Unit Audio** icon.

Note: The earpods should be automatically selected as the default playback device (Windows® 8, Windows® 7, or Windows Vista®) or the default recording and playback device (Windows XP). To make those settings manually, refer to the *User Guide*.

Pairing with a Mac computer

Note: Before you pair the headphones with the computer, make sure that the computer is Bluetooth compatible. Refer to the computer's documentation or contact the computer manufacturer for more information. If your computer is not Bluetooth compatible, install a Bluetooth USB adapter (dongle).

- 1 Turn on Bluetooth on the computer. For instructions, see the computer's documentation or contact the computer manufacturer.
- 2 Click the **Bluetooth status** menu.
- 3 Click **Set up Bluetooth Device**. The *Bluetooth Setup Assistant* opens.
- 4 Click **Continue**.
- 5 Select **Headset** as the device type, then click **Continue**.
- 6 With the earpods turned off, press and hold **MFB** for four seconds. The LED blinks blue and red alternately. Pairing mode is activated.
- 7 Select **INSIGNIA NS-CAHBTEP01**, then click **Continue**. The computer gathers information.
- 8 Click **Continue**.
- 9 Enter **0000** (four zeros) into the **Passkey** field, then click **Continue**.

- 10 Click **Quit** to finish.

Note: To use the earpods, they must be selected as the default input and output device on the computer.

- 11 Click **System Preferences**, then click **Sound**.
- 12 Under **Input**, select **INSIGNIA NS-CAHBTEP01**, then under **Output**, select **INSIGNIA NS-CAHBTEP01**.

For more information on using your headphones with Skype, refer to your *User Guide*.

RESETTING YOUR EARPODS

- To reset your earpods, with your earpods turned off, press and hold **MFB** for 10 seconds.

SPECIFICATIONS

Bluetooth version:	Bluetooth 4.1+EDR
Supported profiles:	A2DP, AVRCP, HFP, HSP
Frequency spectrum:	2.4 ~ 2.4835 GHz ISM Band
Working distance:	Up to 33 ft. (10 m)
Operating temperature:	23 ~ 122° F (-5 ~ 50° C)
Operating time:	Talk: 6 hours Music: 6 hours, playback music track
Standby time:	100 hours
Weight:	0.423 oz (12g)
Average charging time:	2 hours

TROUBLESHOOTING

- **Reset your BT headphone**
- **Plug microUSB cable for charging**

LEGAL NOTICES

FCC statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ONE-YEAR LIMITED WARRANTY

Visit www.insigniaproducts.com for details.

CONTACT INSIGNIA:

1-877-467-4289 (U.S. and Canada)
01-800-926-3000 (Mexico)
www.insigniaproducts.com

INSIGNIA is a trademark of Best Buy and its affiliated companies. Distributed by Best Buy Purchasing, LLC ©2016 Best Buy. All rights reserved.

Made in China