

Waterproof Wireless Speaker User Manual



Introduction

Thank you for purchasing this product.

You can use this item with Pads, Phones, Pods and many types of Smart phone to stream music, and enjoy hands-free calling.

In order to get the best results when using the device, please read this manual first before using.

Features


- IP67 Water resistant Bluetooth Speaker
- Perfect fabric speaker with rubber control panel
- Rich and powerful sound output (15W*2=30W output)
- Unique and patent design
- Support TWS function
- Type-C port
- With adjustable LED light modes
- Support TF card

Specifications

- Bluetooth version: 5.3
- Loudspeaker: $\phi 52\text{mm}$ 4 Ω 15W *2
- Built-in battery: 18650 7.4V/2500mAh
- Size: $\phi 80.0\text{mm}$ *H220.0mm
- SNR: >80dB
- Bluetooth Frequency: 2.402-2.480 GHz
- Wireless Transmission Distance: up to 10m
- Charging time : Approx. 3 hours
- Weight: 0.72kg
- Sensitivity : - 90dBm
- Input: DC5V, 2A
- Profile: A2DP/AVRCP/HFP/HSP/OPP/HID/SPP/PBAP/GATT/SM
- Audio Decoding: MP2, MP3, WMA, APE, FLAC, AAC, MP4, M4A, WAV(IMA - ADPCM & PCM), AIF, AIFC

Package contents


12



1. Package contents



2. USB to Type-C charging cable - 50cm



3. User manual

Important Safety Precautions


When using your Bluetooth Mobile Speaker, basic safety precautions should always be followed, including the following:

- Keep this product and its accessories away from excessive heat.
- Do not operate this device with a damaged cable or after it has malfunctioned or has been damaged in any manner.
- No sharp object should be subjected to the speaker/speaker-drivers as it may damage the speakers.
- Only use a soft cloth, no harsh abrasives or chemicals to clean, as it may damage the surface finishing.
- Ensure the speaker is waterproof by removing all the connected cables and the cap is tightly closed before exposing the speaker to liquid.
- Do not expose the speaker to water while charging, as doing so may result in damage to the speaker or the power source.

Charging your Speaker

1. Connect one end of the included USB Charging Cable to the Charging Port on your speaker.
Then plug the other end of the USB Charging Cable into a suitable USB port on your computer, notebook or power bank to recharge your speaker's internal rechargeable battery.
2. When charging, a red LED light will illuminate to indicate that the unit is charging.
The red light will turn off when your unit is fully charged(under both turn-on/off speaker status)

A Quick Look At Your Speaker

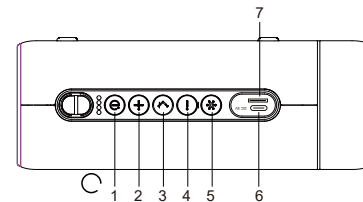

1. Power on/off Button:
To power on your speaker, press and hold the Button.
To power off your speaker, Press and hold the Button.
Press the Button when music is playing to pause the music.
Press the Button when music is paused to begin playing again.
2. Next song / Vol + Button:
To skip to the next track, press the Button.
To raise the volume, press and hold the Button.
3. Bluetooth Button:
Hands free function:
 - Accepting or ending a call (during music playback included):
Upon hearing the incoming call tone, press the Button once to answer the call.
This will also pause your music.
Press the Button again to end the call. Music will resume.
 - Rejecting a call (during music playback included):
Upon hearing the incoming call tone, press and hold the Button to reject the call.

4. Previous song / Vol - Button:

To go back the previous track, press the ◀ Button for 1 second.



To lower the volume, press and hold the ◀ Button for more than 1 second.

5. Light Button:

1) lighting mode:

- Light with music(under music mode)
- Single color switch: Red/Purple/Blue/Sky blue/Green/Aqua
- Breathing light color switch
- Light off

2) TWS mode:

- If you have two I2, you can use them both in sync to listen in True Wireless Stereo (One speaker will play only the left channel, the other will play only the right channel).
- Make sure both I2 are without any Bluetooth connection.
- Power on one speaker and double press  button to TWS function, you will hear the indicating tone. Power on another speaker and double click  button, blue LED blinks. The two speakers will connect automatically.

6. Type-C charging port:

Use the attached Type-C to USB charging cable to charging your speaker.

7. TF card port:

Use TF card to enjoy the music, insert the TF card and speaker will turn on TF card mode automatically.




When U disk plug out, the speaker will turn to Bluetooth mode.

Bluetooth Pairing Procedure

1. Turn on you mobile device and go to the Bluetooth menu.
2. Make sure the speaker is within three meters from the mobile device.
3. Press and hold the ▶ Button on your speaker to power on.
The LED light will blink blue to indicate that you have entered paring mode.
4. Select “ I2 ” on the Bluetooth device menu.
Ensure that the device shows “ Connected ” in the status display.
(If a PIN is required, enter 0000.)
5. Press the button twice to disconnect the Bluetooth mode.

True Wireless Stereo (TWS) Function

If you have two I2, you can use them both in sync to listen in True Wireless Stereo (One speaker will play only the left channel, the other will play only the right channel).

- A. Make sure both I2 are without any Bluetooth connection.
 - Power on one speaker and double press  button to TWS function, you will hear the indicating tone.
Power on another speaker and double click  button, blue LED blinks.
The two speakers will connect automatically.
- B. Under connection, search Bluetooth device and select “ I2 ”.
- C. Under connection, search Bluetooth device and select “ I2 ”.
- D. Hands-free function is only available on the master speaker.
- E. Under TWS status, if the slave speaker is turned off, the master speaker will continue to play music. If the slave speaker is turned on again, the two units will automatically reconnect to TWS status and continue to play music
- F. Under TWS status, if the master speaker is turned off, the slave speaker will not turn off, but the music will stop.
After the master speaker is turned on again, it will reconnect to TWS and then reconnect Bluetooth. Press the  button to play music.

Reconnecting to a disconnected device

1. If previously connected to a Bluetooth device, the I2 will automatically reconnect with the device when powered on.
2. The speaker will not automatically reconnect if the 10 meters distance is exceeded.

Sleeping mode

1. If no Bluetooth device becomes available, the speaker will power off automatically after 10 minutes.
2. If the speaker connected to device without playing music, the speaker will power off automatically after 10 minutes.

FCC Requirement:

Any changes or modifications not expressly approved by the party responsible for compliance may void the user's authority to operate the device. This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device shall not cause harmful interference.

(2) This device shall accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to meet the limits for a Class B digital device.

Pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference with radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference with radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to attempt to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase separation between equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.