



Re: Certification for CB2BLUECON Transmitter
Model: CB2BLUECON
FCC ID: NT8BLUECON
IC: 3043A-BLUECON

USER'S MANUAL INFORMATION

(PRELIMINARY)

The User's Manual is in preparation. The following material will be contained in the manual:

FCC ID: NT8BLUECON

IC: 3043A-BLUECON

This device complies with Part 15 of the FCC Rules and with RSS-247 of Industry Canada. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The term "IC:" before the radio certification number only signifies that Industry Canada technical specifications were met.

Honda

Hands-Free Telephone Module Interface

Suggested User Guide Text

User Guide CT-ELE-003-Preliminary (4.0)

Draft Copy

Note: This document is a Visteon Corporation confidential document.
Disclosure must be controlled by the recipient.

Copyright Notice

This manual is the property of JVisteon Corporation and is for the exclusive use of its employees or assignees. Its contents are not to be disclosed to outside parties without the permission of Johnson Controls Incorporated.

No part of this manual may be reproduced in any form whatsoever, without the permission of Johnson Controls Incorporated.

Note: This document is a Visteon Corporation confidential document. Disclosure must be controlled by the recipient.

Trademarks

Bluetooth is a trademark owned by the Bluetooth SIG, Inc.

Other product names and company names found in this manual may be the trademarks of their respective holders.

User Manual Release Approval

Core Product Lead Engineer: _____

Date: _____

Revisions

Version	Date	Description	Who
Preliminary	December 11, 2002	Preliminary based on SRS 3.0.	Pat Lamotte
Preliminary	April 24, 2003	Modified Figure 2, "Voice Prompts 2". Changed the "press and hold" times from 1.5 to 1.2 seconds. Made many changes to the voice commands. Updated the "Clearing the System of All Stored Information" Caution statement. Updated the "Pairing a Phone to the HFTM System" Caution statement. Made various changes to the instruction steps throughout the guide. Deleted the "Selecting Another Phone" section. Updated the "Transferring" instructions and the "Go Back" and "Cancel" sections.	Pat Lamotte

Continued...

Draft Copy

Revisions (Continued...)

Version	Date	Description	Who
Preliminary	June 25, 2003	Added "BLUECONN" to FCC label in back of document.	Pat Lamotte

Draft Copy

Table of Contents

Learning About the HFTM	1
Precautions	1
Introduction	1
Helpful Hints	4
Using the HFTM Buttons	4
Using Shortcuts	4
Using Icons in this Guide	5
Global Commands	5
Help	5
Go Back.....	5
Cancel	6
Using the HFTM System	6
Using the Phonebook.....	6
Storing a Name Tag with Number	6
Editing the Number for a Current Phonebook Entry	7
Deleting a Stored Phonebook Entry	7
Listing all Entries in the Phonebook.....	8
Navigating the Phonebook	8
Editing List Entries in the Phonebook.....	9
Deleting List Entries in the Phonebook.....	9
Setup	10
Listing Paired Phones.....	10
Editing a Phone Name from the Phone List.....	10
Renaming a Paired Phone	10
Renaming a Paired Phone if You Know Its Name.....	10
Renaming a Paired Phone if You Don't Know its Name.....	11
Clearing the System of All Stored Information.....	11
Setting the Gender of Voice Prompts	12
Using the Security System.....	12
Setting the Passcode for the System.....	12

Locking the System	13
Unlocking the System	13
Using the Phone	14
Pairing/Unpairing a Phone	14
Pairing a Phone to the HFTM System.....	14
Unpairing a Phone from the HFTM System	15
Unpairing a Phone Using "List".....	15
Unpairing a Phone Using "Phone Options, List"	16
Requesting Paired Phone Status.....	16
Making Calls.....	17
Making Calls by Entering Numbers in Single String Format with the "Call/Dial" Command	17
Making an Outgoing Call by Entering Numbers in Block Format	17
Making a Call Using Name Tags	18
Making a Call from List Entries in the Phonebook	18
Calling the Last Number Dialed Using Speech Recognition	18
Muting Calls	19
Muting a Call.....	19
Unmuting a Call	19
Sending Tones During a Call	19
Sending Tones with Voice Recognition	19
Sending Tones with a Stored Name Tag	20
Transferring Calls.....	20
Transferring a Call <i>from</i> the HFTM to Private Mode on the Phone	20
Transferring a Call <i>to</i> the HFTM from Private Mode on the Phone	20
Quick Reference	21
Index	24

Table of Figures

Figure 1. Voice Prompts 1	2
Figure 2. Voice Prompts 2	3

Draft Copy

Learning About the HFTM

Precautions



WARNING

When preparing to set up the HFTM or when adjusting its operation, **be sure the vehicle is in PARK with the engine turned OFF and the key in the ACCESSORY position.** Failure to do so could result in property damage, serious injury, or death for yourself, pets, or other people near the vehicle from carbon monoxide (for example, if the vehicle's engine is running in a garage with the garage door closed) or from physical impact (if the vehicle should slip out of PARK and into gear with the engine running).

Warning labels are used for situations that could result in serious injury *or death* and need to point out the exact danger in the warning text. That's why this is quite a harsh warning. Either our legal department or Honda's legal dept needs to review the wording.

NOTES

It is recommended that your cell phone's battery be fully charged to ensure that the Bluetooth connection will be established with minimal difficulty. Most vehicles require the ignition switch to be turned to the second (accessory) position for programming and/or operation of the HFTM.

When using the voice recognition software, speak clearly in your normal voice (do not shout). Speak in a natural voice. Do *not* try to help the voice recognition software by speaking slowly or by pronouncing words more distinctly than you normally do.

The Bluetooth phone must be within the vehicle's passenger compartment. Do not place the phone in areas with metal obstructions or in metal boxes.

Introduction

The Honda Hands-Free Telephone Module Interface (called the HFTM from now on) is a Bluetooth™ device that allows for wireless communication with other Bluetooth devices. Bluetooth wireless technology is a high frequency radio link that allows two Bluetooth devices to exchange audio information and data at high speed. Because of the versatility of Bluetooth wireless technology, enabled devices do not share all of the same "profiles." To ensure that your phone will be compatible with your HFTM, be sure to purchase a cellular phone that supports the "hands-free profile".

Figure 1 and Figure 2 list the HFTM voice prompts. They are color coded to match their location in this guide. The colors match the sections of the manual that discuss these operations.

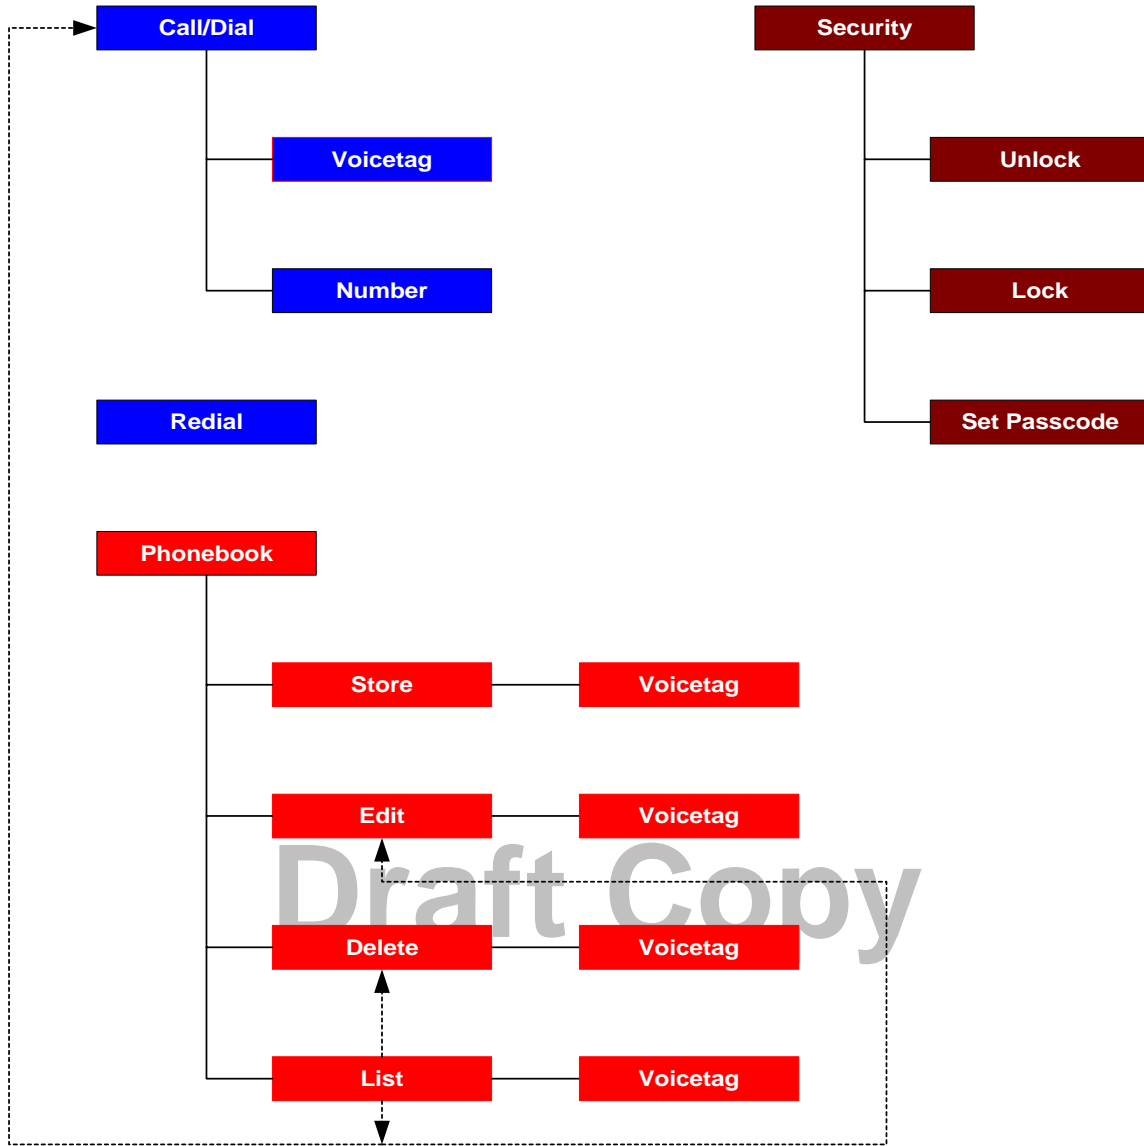


Figure 1. Voice Prompts 1

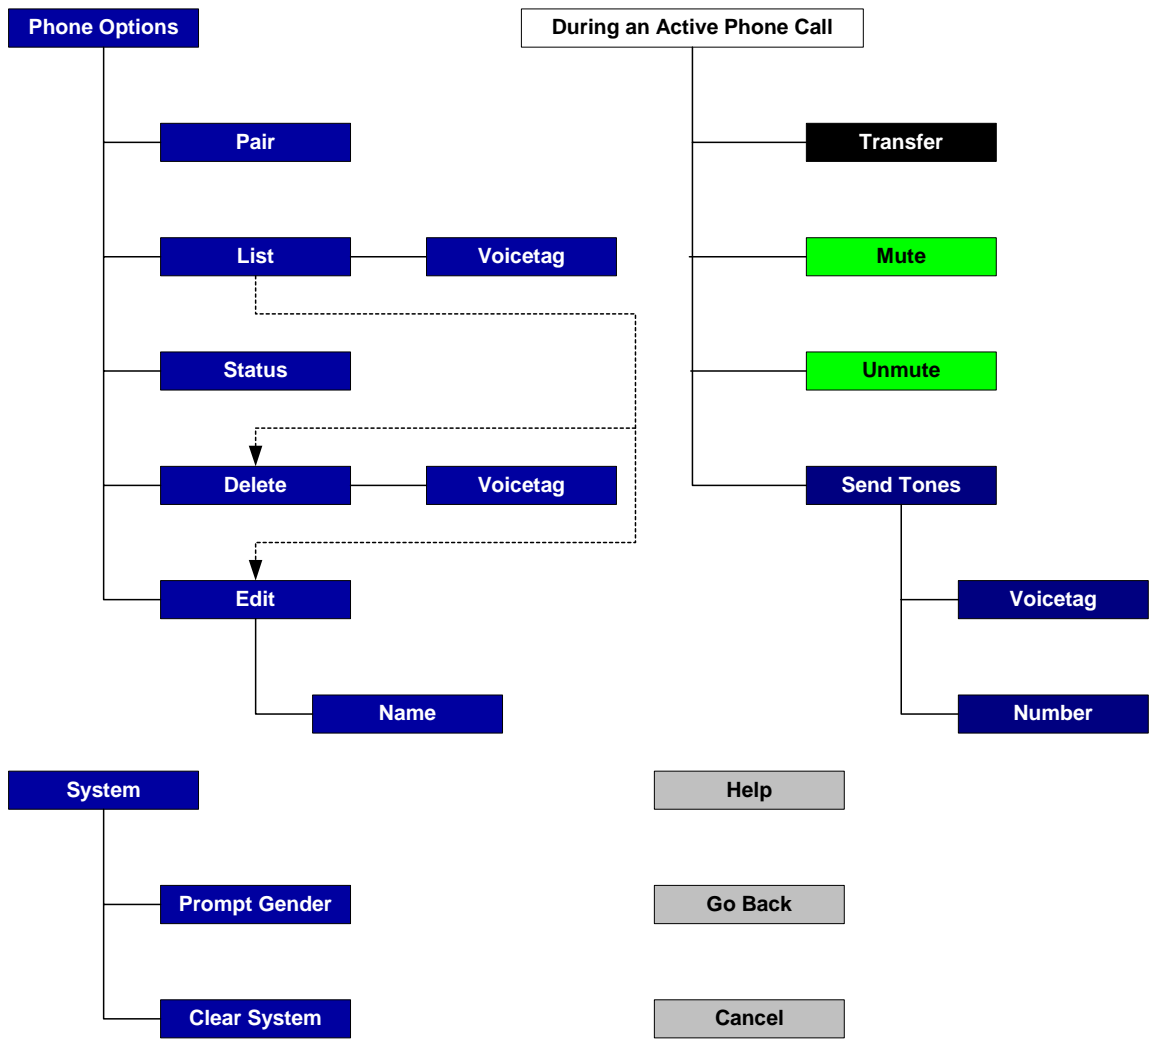


Figure 2. Voice Prompts 2

Draft Copy

Helpful Hints

Using the HFTM Buttons

The following table explains button operation.

Helpful Hints

Button	Mode	When in Command Tree	During an Active Call	During an Incoming Call	During a Second Incoming Call	When Two Calls Active (Call Waiting)
Pick-Up	Press	Terminates Prompt and Activates Speech Recognition	Activates Speech Recognition	Answers the Call	Answers the Second Call	Swaps Between Calls
	Press and Hold (≥ 1.2 sec)	Answers "Yes" to a Verbally Prompted Question	No Function	No Function	No Function	No Function
Hang-Up	Press	Goes Back to the Previous Location in the Command Tree	Hang-Up	Rejects Call	Hang-Up Active Call and Pick-Up Second Call	Hang-Up Active Call
	Press and Hold (≥ 1.2 sec)	Cancels HFT Operation. Unit Returns to Idle.	No Function	Cancels HFT Operation. Unit Returns to Idle.	No Function	No Function

NOTE Remember that you must always press the pickup button and wait for the beep before you speak. For example, if the HFTM says "pardon", you must press the pickup button, wait for the beep, and then repeat your command.

Using Shortcuts

- A. Many commands can be spoken together. For example, "Dial 1 616 555 5555".
- B. If you do not want to listen to a voice prompt, press the pickup button while the system is speaking to skip the prompt. The system will then begin listening for your next command.
- C. To go back in a command process, say "Go back" or press the hangup button. (You will go back where you came from which may be more than one step.)
- D. If nothing is said while the system is listening, the system will time out and stop speech recognition. The next time you push the pickup button, the system will listen from the point at which it timed out (the same point in the speech tree where it timed out). If you push the hangup button instead, you will be prompted at the previous step where you came from.
- E. To stop an operation, say "Cancel" at any time or press and hold the hangup button. Speech recognition is terminated and radio operation continues. The system will begin from the main menu the next time speech recognition is activated.
- F. If you have just finished a command sequence, you will be taken back to the main menu. For example, if you have stored a name tag (Peter, for example), the final prompts from the system will

be "Peter is stored" and "Returning to the main menu." The next time the pickup button is pushed, you will be at the main menu.

- G. Say "Help" at any time to hear a list of available options.
- H. Entering a string of numbers can be accomplished by saying all the numbers at once, or by separating the string into blocks. The system will say the recognized numbers after each block. Say "Go back" to remove the last block entered. Say "Verify Number" to hear all numbers entered..
- I. If the system recognizes speech but cannot determine the spoken command, the system will reply with "Pardon", "Please Repeat", and then play the "Help" prompt.

Using Icons in this Guide



When you see the "Choice" Icon in this user guide, it means that the step it is in front of is another way to do something. You can choose whatever method you like best.

Global Commands

The commands in this section can be used wherever you are in the voice tree.

Help

You can get help at all locations in the voice recognition system.

STEP	GETTING HELP
1	Press the pickup button and say "Help" at any time.
2	The HFTM lists available options. For example, say "Help" at the Main menu and the HFTM tells you all available calling options (<i>Call, Dial, Redial, Transfer, and Next phone</i>), setup options (<i>Phone Options, Phonebook, Security, and System</i>), and the options that are always available; <i>Go back, Cancel, and Help</i> .
3	To select the option you want help with... Press the pickup button and say the option you want.

Getting Help

Go Back

Use this command to go back in the voice tree.

STEP	GOING BACK
1	Press the pickup button and say "Go back" at any time.
2	You will be taken back to where you came from (which could be more than one step).

Go Back

Cancel

Use the Cancel command to stop an operation.


Cancel	STEP	CANCEL
	1	Press the pickup button and say "Cancel" at any time.
	2	Speech recognition is terminated and radio operation continues. The system will begin from the main menu the next time speech recognition is activated.

Using the HFTM System

Using the Phonebook


Storing a Name Tag with Number

Storing a Name Tag
with Number

STEP	STORING A NAME TAG WITH NUMBER
1	Press the pickup button and say "Phonebook". You are given a choice of options.
2	Say "Store". You are asked what name you want to store.
3	Say a name such as "Rich". You are asked what phone number to store.
4	Say a phone number such as "3992222" or say it in blocks like "399 2222". The number is read back to you (or the blocks as you say them).
5	To store this number, press and hold the pickup button for 1.2 seconds until you hear a beep.  Or, say "Enter". The HFTM tells you that the number has been stored and that it is returning to the main menu. NOTE You may not hear this message right away. It may take some time before you hear it depending on how many name tags are already stored.



Editing the Number for a Current Phonebook Entry

The HFTM can store 50 name tags.

STEP	EDITING THE NUMBER FOR A CURRENT PHONEBOOK ENTRY
1	<p>Press the pickup button and say "Phonebook".</p> <p>You are given a choice of options.</p>
2	<p>Say "Edit".</p> <p>You are asked what name you want to edit.</p>
3	<p>Say a name such as "Rich" or say "List" ("List" reads a list of phonebook entries from which you can select the one you want to edit).</p> <p>HFTM tells the current number for Rich. It then asks what the new number is.</p>
4	<p>Say the new number such as "3992222" or say it in blocks like "399 2222".</p> <p>The number is read back to you (or the blocks as you say them).</p>
5	<p>Press and hold the pickup button for 1.2 seconds until you hear a beep to store this number.</p> <p> Or, say "Enter".</p> <p>The HFTM beeps to tell you that the new number has been stored and that it is returning to the main menu.</p>

Editing a Phonebook Number

Deleting a Stored Phonebook Entry

STEP	DELETING A STORED PHONEBOOK ENTRY
1	<p>Press the pickup button and say "Phonebook".</p> <p>You are given a choice of options.</p>
2	<p>Say "Delete".</p> <p>You are asked what name you want to delete.</p>
3	<p>Say a name to delete like "Rich" or say "List" ("List" reads a list of phonebook entries from which you can select the one you want to edit).</p> <p>You are asked if you want to delete "Rich"?</p>
4	<p> Say "Yes" and it tells you the name has been deleted and that it is returning to the main menu.</p> <p> Say "No" if that is not the name you wish to delete. You are asked again what name you want to delete (back to end of Step 2 above).</p>

Deleting a Phonebook Entry






Listing all Entries in the Phonebook

Listing all
Phonebook Entries


STEP	LISTING ALL ENTRIES IN THE PHONEBOOK
1	<p>Press the pickup button and say "Phonebook".</p> <p>You are given a choice of options.</p>
2	<p>Say "List".</p> <p>Starts at beginning and reads you the entire list (or tells you if it is empty). It then returns to the main menu.</p> <p>The list is read in the order the numbers were put in the phonebook. See the next section (<i>Navigating the Phonebook</i>) for directions to move through a long phonebook list.</p>

Navigating the Phonebook

Navigating the
Phonebook



STEP	NAVIGATING THE PHONEBOOK
1	<p>Press the pickup button and say "Phonebook".</p> <p>You are given a choice of options.</p>
2	<p>Say "List". The list is read in the order the numbers were put in the phonebook. Or, after the list starts, you can...</p> <ul style="list-style-type: none">  Say "Reverse" to hear the numbers in the reverse order from which they were put in the phonebook.  Say "Pause" to stop the list reading.  Say "Continue" to stop pausing and start the list again.  Say "Previous" to hear the previous entry again.  Say "Next" to hear the next entry.
3	<p>When finished reading the list, the HFTM returns to the main menu.</p>

Editing List Entries in the Phonebook

STEP	EDITING LIST ENTRIES IN THE PHONEBOOK
1	<p>Press the pickup button and say "Phonebook".</p> <p>You are given a choice of options.</p>
2	<p>Say "List". The list is read in the order the numbers were put in the phonebook. (See <i>Navigating the Phonebook</i> to hear the list in a different order.)</p>
3	<p>When you hear the list name you want to edit, say "Edit" to edit that number.</p> <p>The current number for that list name is given. You are asked for the new number.</p>
4	<p>Say the new number such as "3992222" or say it in blocks like "399 2222".</p> <p>The number is read back to you (or the blocks as you say them).</p>
5	<p>Press and hold the pickup button for 1.2 seconds.</p> <p> Or, say "Enter".</p> <p>The name and number are read to you and are stored. The HFTM returns to the main menu.</p>

Editing Phonebook
List Entries

Deleting List Entries in the Phonebook

STEP	DELETING LIST ENTRIES IN THE PHONEBOOK
1	<p>Press the pickup button and say "Phonebook".</p> <p>You are given a choice of options.</p>
2	<p>Say "List". The list is read in the order the numbers were put in the phonebook. (See <i>Navigating the Phonebook</i> to hear the list in a different order.)</p>
3	<p>When you hear the list name you want to delete, say "Delete" to delete that entry.</p> <p>You are asked if you want to delete this list entry.</p>
5	<p> Say "Yes" to delete the name and it tells you the name has been deleted and that it is returning to the main menu.</p> <p> Say "No" if that is not the name you wish to delete and you are asked again what name you want to delete and can begin the deletion process again.</p>

Deleting Phonebook
Entries

Setup

Listing Paired Phones

Listing Paired Phones

Follow these instructions to hear a list of the phones paired with the HFTM module.

STEP	LISTING PAIRED PHONES
1	Press the pickup button and say "Phone Options". The system prompts you with available options.
2	Say "List".
4	The system lists the names of all the cellular phones that are currently paired with the HFTM module.
5	The HFTM then says that the entire list has been read and then returns to the main menu.

Editing a Phone Name from the Phone List

Editing a Name in the Phone List

STEP	EDITING A PHONE NAME FROM THE PHONE LIST
1	Press the pickup button and say "Phone Options". The system prompts you with available options.
2	Say "List". The system lists the phones paired to your HFTM.
3	When you hear the phone you want to edit (such as "Pat's Phone"), press the pickup button and say "Edit".
4	The system asks you for the new name for this phone. Say the new name such as "Jason's phone".
5	The HFTM says it has changed the name and returns to the main menu.

Renaming a Paired Phone

You can rename (edit) a paired phone if you know the phone's name or if you do not know its name.

Renaming a Paired Phone if You Know Its Name

Renaming a Paired Phone

STEP	RENAMING A PAIRED PHONE IF YOU KNOW ITS NAME
1	Press the pickup button and say "Phone Options, Edit".
2	The system asks which phone you want to edit. Say the "Name" of the phone you want to edit.
3	You are then asked for the new name for this phone. Say the "New Name" for this phone.
4	The HFTM tells you the phone name has been changed and returns you to the main menu.

Renaming a Paired Phone if You Don't Know its Name

STEP	RENAMING A PAIRED PHONE IF YOU DON'T KNOW ITS NAME
1	Press the pickup button and say "Phone Options". The system lists the phones paired to your HFTM.
2	Say "List". The system lists the phones paired to your HFTM.
3	When you hear the phone you want to rename (such as "Dave's Phone"), say "Edit".
4	You are then asked for the new name for this phone. Say the "New Name" for this phone.
5	The HFTM tells you the phone name has been changed and returns you to the main menu.

Renaming a Paired Phone

Clearing the System of All Stored Information



CAUTION

If you clear the system of all stored information, you will clear all paired phones, phonebook entries, and the passcode. Be sure you want to clear the system if you continue with this procedure. The system warns *"This process will clear all paired phones, clear all entries in the phonebook, and clear the passcode. Is this what you would like to do?"*

STEP	CLEARING THE SYSTEM OF ALL STORED INFORMATION
1	Press the pickup button and say "System". The system prompts you with available options.
2	Say "Clear". You are warned that this process clears all paired phones, phonebook entries, and the passcode. You are asked if you want to continue.
3	<p>Choice Say "Yes" to clear all stored information.</p> <p>Choice Say "No" and you are returned immediately to the main menu without clearing the stored information.</p>
4	<p>If you said "Yes", you are asked again if you want to clear all stored information.</p> <p>Choice Say "OK" to clear it. The stored information is cleared. After a short time, the system announces that the system was cleared and that it is returning to the main menu.</p> <p>NOTE You may not hear this message right away. It may take some time before you hear it depending on how much information there is to clear.</p> <p>Choice Say "Cancel" and you are returned immediately to the main menu without clearing the stored information.</p>

Clearing the System of all Stored Information

Setting the Gender of Voice Prompts

STEP	SETTING THE GENDER OF VOICE PROMPTS
1	<p>Press the pickup button and say "System".</p> <p>The system prompts you with available options.</p>
2	<p>Say "Prompts".</p> <p>The system asks if you would like male or female prompts.</p>
3	<p>Say "Male" or "Female".</p> <p>The gender of the prompts is changed to what you chose and you are returned to the main menu.</p>

Using the Security System

The HFTM's security system does more than just lock the phonebook. It locks the HFTM system completely. When you lock it, it cannot be used by anyone who does not know the 4-digit passcode. It is disabled completely. For example, you can lock the system when you are concerned that someone may want to listen to the phone numbers in your phonebook or make a call with the system. When someone tries to use the locked system (like pressing any button), the HFTM announces that the system is locked and that they must say the 4-digit passcode to continue.

Setting the Passcode for the System

STEP	SETTING THE PASSCODE FOR THE SYSTEM
1	<p>Press the pickup button and say "Security".</p> <p>The system prompts you with available options.</p>
2	<p>Say "Set passcode".</p> <p>The system tells you to give the current 4-digit passcode. (If this is the first time you are setting a passcode, you will not be asked for the current passcode. Go to Step 4.)</p>
3	<p>Say the current "Passcode".</p> <p>This number is repeated to you.</p>
4	<p>You are asked to give a new passcode.</p> <p>Say the new "Passcode".</p> <p>This new number is repeated to you.</p> <p>Press and hold the pickup button for 1.2 seconds.</p> <p>Choice Or, say "Enter".</p> <p>The HFTM tells you the new passcode has been stored and returns to the main menu.</p>

Locking the System

NOTE	To lock the system, a passcode must be set.
-------------	---

STEP	LOCKING THE SYSTEM
1	Press the pickup button and say "Security". The system prompts you with available options.
2	Say "Lock". The system says it is locked, beeps twice, and locks itself.

Locking the System

Unlocking the System

STEP	UNLOCKING SYSTEM
1	When you try to use a locked system (like pressing a button), the system informs you that the system is locked and that you must say the 4-digit passcode to continue.
2	Say the "passcode". The system is unlocked. The system tells you it is going to the main menu.
3	Press the pickup button and say "Security". The system prompts you with available options.
4	Say "Unlock". The system says it is unlocked and returns to the main menu.

Unlocking the System

Draft Copy

Using the Phone

Pairing/Unpairing a Phone

Pairing a Phone to the HFTM System

To use your HFTM, you must first pair it (register the system with the phone) with a Bluetooth hands-free-profile-enabled cellular phone. Please refer to your phone manufacturer's owner's manual for instructions on how to place your cellular phone into pairing mode.




The pairing process requires operation of your mobile phone. For safety, only perform while the vehicle is stopped.

CAUTION

NOTE The following pairing procedure is for the Nokia 6310i cellular telephone.

NOTE In order to complete successful pairing, both the cellular phone and the HFTM must be in pairing mode at the same time. The HFTM remains in pairing mode for about three minutes before timing out.

STEP	PAIRING A PHONE TO THE HFTM SYSTEM
1	Press the HFTM module's pickup button and say "Phone Options". The system prompts you with available options.
2	Say "Pair".
3	The system will then ask for a 4-digit code. This can be any number you choose as long as you enter the same number on the phone in a minute. Say your four-digit code. For example, "One-Two-Three-Four". The system repeats your code.
4	Press and hold the pickup button for 1.2 seconds.  Or, push the pickup button and say "Enter". The system says it is entering discovery mode.
5	At the Nokia 6310i phone's "T-Mobile" screen, press the Menu button.
6	Press the phone's down-arrow button until you reach the "Bluetooth" screen (you will page through quite a few screens). When you see it, press the Select button.

Pairing a Phone

Continued...

STEP	PAIRING A PHONE TO THE HFTM SYSTEM (Continued)
7	Press the phone's down button once until you see "Search for audio accessories". Press the Select button. The phone tells you it is searching.
8	The "Devices Found" screen appears (a small car with the words "BLUConnect" next to it). Press the Select button. The words "Connecting to..." are displayed.
9	When the phone's screen displays "Enter passcode: ", enter the same passcode you used for the HFTM on the phone's keyboard. When finished entering the passcode, press the phone's OK button.
10	The HFTM says "A new phone has been found. State the name for this phone". Press the HFTM pickup button and say the name for your phone (such as "Nokia 6310i").
11	You will hear "Nokia 6310i has been successfully paired. Returning to main menu". Press the phone's Back button two times to return to the "T-Mobile screen".

Unpairing a Phone from the HFTM System

To remove the registration between the HFTM module and your cellular phone(s), you must delete the paired phone(s).



CAUTION

After deleting a paired phone, if you attempt to use the HFTM to make a call with that phone, the HFTM tells you the phone cannot be found and returns to the main menu. If no phones are paired to the HFTM, the HFTM tells you no phones can be found and returns to the main menu.

NOTE

If you make a mistake during the deleting process or decide not to clear a phone, press and hold the hangup button until it beeps two times to exit the unpairing procedure.

Unpairing a Phone Using "List"

STEP	UNPAIRING A PHONE USING "LIST"
1	Press the pickup button and say "Phone Options". The system prompts you with available options.
2	Say "List". The system lists the phones paired to your HFTM.

Continued...

Unpairing a Phone

STEP	UNPAIRING A PHONE USING "LIST" (Continued)
3	When you hear the phone you want to delete (such as "Dave's Phone"), press the pickup button and say "Delete".
4	The system asks you if you want to delete "Dave's Phone". Say "Yes" to delete the phone. (Say "No" to leave it paired and to return to the main menu).
5	The HFTM says it is preparing to delete this phone. If you want to delete it, say "OK" (say "Cancel" if you change your mind.)
6	When finished, the system indicates that the phone was deleted.

Unpairing a Phone Using "Phone Options, List"

STEP	UNPAIRING A PHONE USING "PHONE OPTIONS LIST"
1	Press the pickup button and say "Phone Options, List".
2	The system lists the phones paired to your HFTM.
3	When you hear the phone you want to clear (such as "Dave's Phone"), press the pickup button and say "Delete".
4	The system asks you if you want to delete "Dave's Phone". Say "Yes".
5	The HFTM says it is preparing to delete this phone. If you want to delete it, say "OK" (say "Cancel" if you change your mind.)
6	When finished, the system indicates that the phone was deleted.


Requesting Paired Phone Status

Requesting Paired Phone Status

STEP	REQUESTING PAIRED PHONE STATUS
1	Press the pickup button and say "Phone Options". The system prompts you with available options.
2	Say "Status". The system tells the name of your phone, whether it is paired or not, signal strength, and battery strength (not all phones supply all of these parameters). It then returns to the main menu.


Making Calls

Making Calls by Entering Numbers in Single String Format with the "Call/Dial" Command

STEP	MAKING CALLS BY ENTERING NUMBERS IN SINGLE STRING FORMAT WITH THE "CALL/DIAL" COMMAND
1	<p>Press the pickup button and say "Call" or "Dial". You are asked what name or number you want to call.</p>
2	<p>Say the number such as "6165555555" (a continuous number string). The number is repeated to you.</p>
3	<p>Press and hold the pickup button for 1.2 seconds.  Or, say "Call" or "Dial". You are told the number is being dialed and the number is dialed.</p>



Making Calls with a Number String

Making an Outgoing Call by Entering Numbers in Block Format


STEP	MAKING AN OUTGOING CALL BY ENTERING NUMBERS IN BLOCK FORMAT
1	<p>Press the pickup button and say "Call" or "Dial". You are asked what name or number you want to call.</p>
2	<p>Say the number in block format. Example: Say the area code such as "616". The HFTM says "616". Then say the next three digits such as "399". The HFTM says "399". Then say the final four digits such as "3333". The HFTM says "3333".</p>
3	<p>After you start entering blocks of numbers, say "Verify Number" and all numbers (all blocks) you have spoken up to that point are read back to you.</p>
4	<p>Press and hold the pickup button for 1.2 seconds.  Or, say "Call" or "Dial". You are told the number is being dialed and the number is dialed.</p>

Making Calls with a Number Block

Making a Call Using Name Tags

Making Calls with a Name Tag	STEP	MAKING A CALL USING NAME TAGS
	1	<p>Press the pickup button and say "Call" or "Dial".</p> <p>You are asked what name or number you want to call.</p>
	2	<p>Say the name of a person you want to call (a name you programmed into the phonebook list).</p> <p> Or, say "List".</p> <p>You are asked if you want to call this person.</p>
3	<p>Press and hold the pickup button for 1.2 seconds.</p> <p> Or, say "Call" or "Dial" to make the call.</p> <p>You are told the number is being called and the number is dialed.</p>	

Making a Call from List Entries in the Phonebook

Making a Call from List Entries	STEP	MAKING A CALL FROM LIST ENTRIES IN THE PHONEBOOK
	1	<p>Press the pickup button and say "Phonebook".</p> <p>You are given a choice of options.</p>
	2	<p>Say "List". The list is read in the order the numbers were put in the phonebook. (See <i>Navigating the Phonebook</i> to hear the list in a different order.)</p>
	3	<p>When you hear the list name you want to call, say "Call" or "Dial" to dial that number.</p> <p>You are asked if you want to call the person from the list.</p>
4	<p>Press and hold the pickup button for 1.2 seconds.</p> <p> Or, say "Call" or "Dial".</p> <p>The number is dialed.</p>	

Calling the Last Number Dialed Using Speech Recognition

Calling Last Number Dialed	STEP	CALLING THE LAST NUMBER DIALED USING SPEECH RECOGNITION
	1	<p>Press the pickup button and say "Redial".</p>
2	<p>The HFTM says it is redialing and the last number dialed by the paired phone is dialed again.</p>	

Muting Calls

Muting a Call

NOTE Call muting is available only during an active call. It prevents the person on the other end of the line from hearing you (and from hearing the other people in your vehicle). You can still hear them.

STEP	MUTING A CALL
1	During a phone conversation, press the pickup button and say "Mute". The HFTM tells you it is muting the call.
2	The call is muted.

Muting a Call

Unmuting a Call

NOTE Call muting is available only during an active call. It prevents the person on the other end of the line from hearing you (and from hearing the other people in your vehicle). You can still hear them. When you unmute the call, they will be able to hear you again.

STEP	UNMUTING A CALL
1	During a muted phone conversation, press the pickup button and say "Unmute" or "Mute". The HFTM tells you it is unmuting the call.
2	The call is unmuted.

Unmuting a Call

Sending Tones During a Call

Sending Tones with Voice Recognition

There may be times during calls when you have to make a menu choice, enter your credit card number, interface with voice mail or a calling card, etc. You have to send tones to do it. Here's how you send tones.

NOTE This feature is available only during an active call.

STEP	SENDING TONES WITH VOICE RECOGNITION
1	During the present call, press the pickup button and say the digits you want to send.
2	Press the pickup button and say "Call" or "Dial" or "Enter". You will hear the tones being sent.

Sending Tones

Sending Tones with a Stored Name Tag

Instead of having to read a credit card number or calling card number to the HFTM, you can store that number as a name tag. This function assumes that you have first stored the number as a nametag. See *Storing a Name Tag with Number*.

Sending Tones

STEP	SENDING TONES WITH A STORED NAME TAG
1	During the present call, say the name of the name tag you want to send tones for. Press pickup button.
2	Then say "Call" or "Dial" or "Enter". You will hear the tones being sent.

Transferring Calls

Transferring a Call *from* the HFTM to Private Mode on the Phone

STEP	TRANSFERRING A CALL
1	When talking on the HFTM, press the pickup button and say "Transfer".
2	The phone call is now a private call (not on the HFTM).

Transferring a Call

Transferring a Call *to* the HFTM from Private Mode on the Phone

STEP	TRANSFERRING A CALL
1	Press the pickup button and say "Transfer".
2	The phone conversation is no longer a private call (conversation is now on the HFTM).

Quick Reference

This Quick Reference shows "at-a-glance" how to perform HFTM operations. If you need more information, refer to the given page.

NOTE Remember to press the pickup button before speaking.

Operation	Do this...	Page
Terminating a voice prompt	Press the pickup button.	4
Going back in a command process	Say "Go back".	4
Canceling an operation	Say "Cancel" or push the hangup button.	4
Getting Help	Say "Help" at any time.	5
Storing a name tag	Say "Phonebook, Store". Say "List" to select from the list.	6
Editing a phonebook number (name tag)	Say "Phonebook, Edit". When asked what name to edit, say the name or say "List" to select from a list (push the pickup button to select the one you want). When asked for the new number, say the new number. After the number is read back to you, say "Store".	7
Deleting a phonebook (name tag)	Say "Phonebook, Delete". When asked what name to delete, say the name or say "List" to select from a list (push the pickup button to select the one you want). After being prompted, say "Yes" to delete the name tag.	7
Listing all phonebook entries	Say "Phonebook, List". Numbers are read from the beginning in the order they were put in the phonebook.	8
Navigating the phonebook	Say "Phonebook, List". The list is read in the order the numbers were entered in the phonebook. After it starts, say "Reverse" to hear the phonebook in reverse order, say "Pause" to pause the list, say "Continue" to continue the list, say "Previous" to hear the previous entry again, or say "Next" to hear the next entry.	8
Editing phonebook entries	Say "Phonebook, List". The list is read. When you hear the name you want to edit, say "Edit". When prompted, say the new number. After the new number is read back to you, say "Store".	9
Deleting phonebook entries	Say "Phonebook, List". The list is read. When you hear the name you want to delete, say "Delete". When asked if you want to delete that entry, say "Yes" or "No".	9

Quick Reference

Continued...

Quick Reference

Operation	Do this...	Page
Listing paired phones	Say "Phone Options, List". The HFTM lists all phones paired to it.	10
Editing a name in the phone list	Say "Phone Options, List". When you hear the phone you want to edit, say "Edit". Say the phone's new name when prompted.	10
Renaming a known phone	Say "Phone Options, Edit". When prompted, say the name of the phone you want to edit. When prompted, say the new name for this phone.	10
Renaming an unknown phone	Say "Phone Options, List". When you hear the phone you want to rename, say "Edit". When prompted, say the new name.	11
Clearing all stored information	Say "System". When prompted with options, say "Clear". After the warning, say "Yes" to clear. Say "OK" when prompted to clear.	11
Making voice prompts male or female	Say "System". When prompted, say "Prompts". When prompted, say "Male" or "Female".	12
Setting a passcode for the system	Say "Security"; then choose the "Set passcode" option. After giving the passcode say "Store".	12
Locking the system	Say "Security". Say "Lock" when prompted with available options.	13
Unlocking the system	Press the pickup button. When prompted, say the passcode. Say "Security". When prompted, say "Unlock".	13
Pairing a phone to the HFTM	Depends on the phone. See page number on the right.	4
Unpairing a phone from the HFTM using "List"	Say "Phone Options, List". When you hear the phone you want to unpair, say "Delete". Say "Yes" when prompted. Say "OK" when prompted.	15
Unpairing a phone from the HFTM using "Phone Options, List"	Say "Phone Options, List". When you hear the phone you want to upair, say "Delete". Say "Yes" when prompted. Say "OK" when prompted.	16

Continued...

Operation	Do this...	Page
Requesting paired phone status	Say "Phone, Status".	16
Making calls with a single string	Say "Call" or "Dial". When asked, say the number you want to call as a single string (like "6163941234"). After the number is repeated to you, say "Call" or "Dial".	17
Making calls with block format	Say "Call" or "Dial". When asked what name or number you want to call, say the number in blocks like "616 394 1234". After you say a block, the HFTM repeats the numbers in that block. After saying all the numbers, say "Call" or "Dial" to call the number.	17
Making calls with name tags	Say "Call" or "Dial". When asked what name or number you want to call, say the name of the person (the name tag you programmed into the phonebook list) or say "List" to hear all name tags in the phonebook. After saying the number or hearing the number in the list, say "Call" or "Dial".	18
Making a call from the phonebook list	Say "Phonebook, List". The list is read. When you hear the name you want to call, say "Call" or "Dial". After being prompted, say "Call" or "Dial" again and the number is dialed.	18
Calling the last number dialed	Say "Redial". The last number dialed is dialed again.	18
Muting a call so person you are talking to cannot hear you	Say "Mute". The person you are talking to cannot hear you or other people in your vehicle. You can still hear them.	19
Unmuting a muted call so person you are talking to can hear you	Say "Unmute" or "Mute". The person you are talking to can hear you and the other people in your vehicle again.	19
Sending tones during a call with Voice Recognition	During a call, press the pickup button and say the digits you want to send. Press the pickup button and say "Call" or "Dial" or "Enter". Tones are sent.	19
Sending tones during a call associated with a stored name tag	During a call, press the pickup button and say the name of the name tag you want to send tones for. Press the pickup button and say "Call". Tones are sent.	20
Transferring from HFTM to phone	During a call, press the pickup button and say "Transfer".	20
Transferring from Phone to HFTM	While in idle, press the pickup button and say "Transfer".	20

Quick Reference

Index

4

- 4-digit passcode for clearing system..... 11
- 4-digit passcode for locking system..... 12, 13
- 4-digit passcode for pairing 14
- 4-digit passcode for unlocking system..... 12, 13

B

- Block format 5, 6, 7, 17
- Bluetooth
 - what is it? 1
- Buttons
 - hangup button 4
 - holding them pressed 4
 - how they work 4
 - pickup button 4

C

- Call muting 19
- Call unmuting 19
- Calling card
 - sending tones 19, 20
- Calls
 - answering 4
 - answering a second 4
 - hanging up 4
 - rejecting a second 4
 - swapping between 4

H

- Help
 - when can I use it? 5

L

- Listing phones 10
- Locking system 13

M

- Menus
 - sending tones 19, 20
- Muting 19

N

- Names
 - renaming a phone 10, 11
- Numbers
 - blocks 5
 - strings 5

P

- Pairing phones
 - 4-digit code number 14
 - discovery mode 14
 - how to do it 14
- Passcode See 4-digit
- Phone
 - what kind do I need? 1
- Phonebook list
 - navigating it 6
- Prompts
 - "Pardon" 5
 - "Please Repeat" 5
 - male or female 12
 - skipping 4

R

- Renaming a phone 10, 11

S

- Safety 1
- Security See 4-digit
- String format 5

T

- Timing out 4, 14
- Tones
 - sending tones 19, 20
 - sending tones using a name tag 20
- Transferring calls
 - from private mode to the HFTM 20
 - from the HFTM to private mode 20

U

- Unlocking system 12, 13
- Unmuting 19
- Unpairing phones
 - deleting a paired phone 15
- Unpairing phones 15

V

- Voice commands
 - "Call" 17, 18, 19, 20
 - "Cancel" 4, 6, 11, 16
 - "Clear" 11
 - "Continue" 8
 - "Delete" 7, 9, 16
 - "Dial" 17, 18, 19, 20
 - "Edit" 7, 9, 10, 11

"Enter"	6, 7, 9, 12, 14, 20	"Reverse"	8
"Female"	12	"Security"	12, 13
"Go back"	4, 5	"Set passcode"	12
"Go Back"	5	"Status"	16
"Help"	5	"Store"	6
"List"	7, 8, 9, 10, 11, 15, 18	"System"	11, 12
"Lock"	13	"Transfer"	20
"Male"	12	"Unlock"	13
"Mute"	19	"Unmute"	19
"Next"	8	"Verify Number"	5, 17
"No"	7, 9, 11, 16	"Yes"	7, 9, 11, 16
"OK"	11, 16	Voice mail	
"Pair"	14	sending tones	19, 20
"Pause"	8	Voice recognition	
"Phone Options"	10, 11, 15, 16	helping it work best	1
"Phone Options, Edit"	10	Voice tree	2, 3, 5
"Phone Options, List"	16	W	
"Phone"	14	Warnings	
"Phonebook"	6, 7, 8, 9, 18	Vehicle in PARK, engine OFF, in	
"Previous"	8	ACCESSORY position	1
"Prompts"	12		
"Redial"	18		

Draft Copy

This device complies with FCC rules part 15. Operation is subject to the following two conditions: (1)This device may not cause harmful interference, and (2)This device must accept any interference that may be received including interference that may cause undesired operation. WARNING: The transmitter has been tested and complies with FCC and IC rules. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the device.

The term "IC:" before the certification/registration number only signifies that Industry Canada technical specifications were met. :

IC: 3043A-BLUECON FCC ID: NT8BLUECON MODEL: CB2BLUECON

Draft Copy