


Typical H-Plane Antenna Pattern

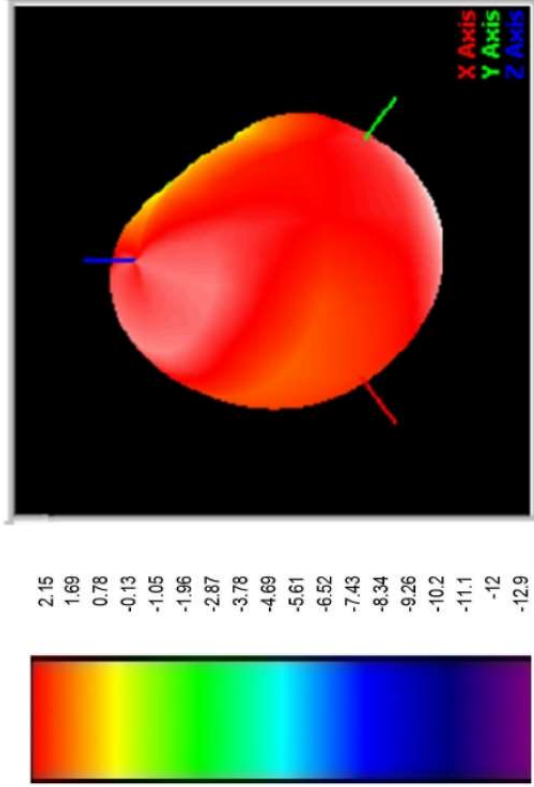

HOPE MICROELECTRONICS CO., LTD
Add: 2/F, Building 3, Pingshan Private Enterprise Science and Technology Park, Lishan Road, Xili Town,
Nanshan District, Shenzhen, Guangdong, China
Tel: 86-755-82973805
Fax: 86-755-82973550
Email: sales@hoperf.com
Website: <http://www.hoperf.com>
<http://www.hoperf.cn>

433MHz spring antenna

Model: HP-433-2.5A-23.5T

Main Electrical Data

Frequency Range(MHz): 433MHz+/-5MHz

V.S.W.R: <=1.5

Input Impedance(Ω): 50

Max-power(W): 10

Gain(dBi): 2.15


Weight(g): 2

Height(mm): 32+/-1(23.5T)

Color: Copper

Connector Type: soldering

Dimension:

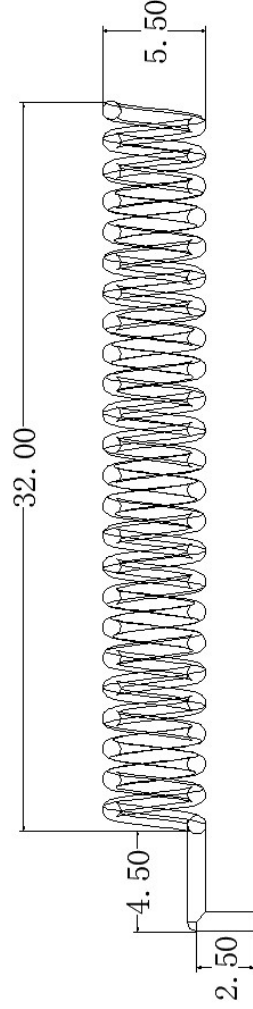

Spring diameter: 0.8mm, number of turns: 23.5