

MCP-3020 User Manual

This equipment can be used in member states of the European Union once the corresponding administrative licence is obtained.

WARNING: TO PREVENT FIRE OR ELECTRICAL SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE



THE LIGHTNING FLASH AND ARROW HEAD WITHIN THE TRIANGLE IS A WARNING SIGN ALERTING YOU OF "DANGEROUS VOLTAGE" INSIDE THE PRODUCT.

CAUTION:
**RISK OF ELECTRIC SHOCK
DO NOT OPEN**


CAUTION: TO REDUCE THE RISK OF ELECTRICAL SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



THE EXCLAMATION WITHIN THE TRIANGLE IS WARNING SIGN ALERTING YOU OF IMPORTANT INSTRUCTIONS ACCOMPANYING THE PRODUCT.


SEE MARKING ON BOTTOM / BACK OF PRODUCT

Correct Disposal of this product




This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

DESCRIPTION OF THE DEVICE

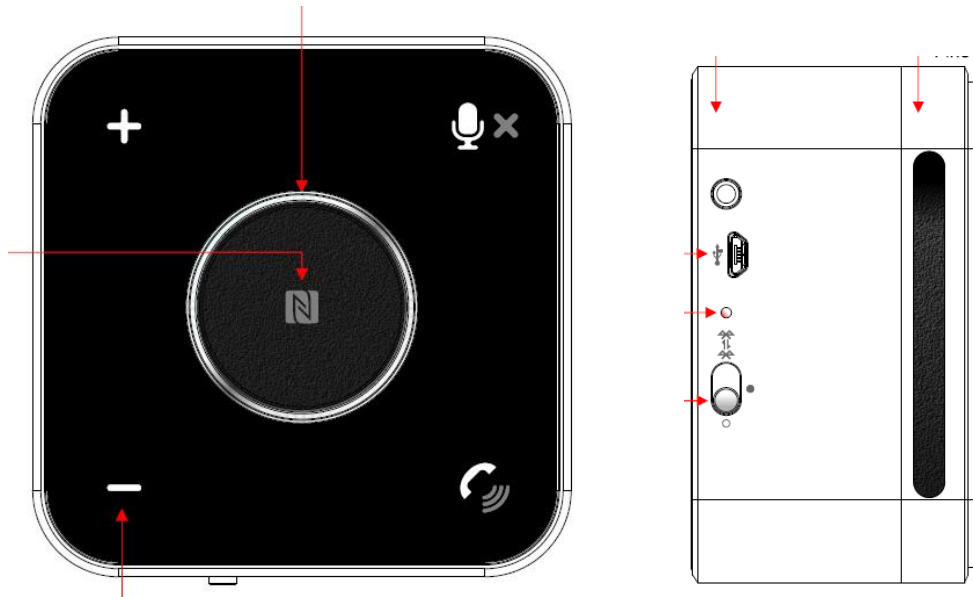

 : Volume +  : Volume -  : Mute  : Talk On/ Off

 : Power/ Pairing Mode  : LED Indicator

 : 3.5 mm input  : Micro USB Charging Port

 : NFC antenna area

CAUTION

The adapter shall be installed near the equipment and shall be easily accessible.

This charger is for indoor use only.

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Hereby, Giant Telecom Ltd. declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

The operating temperature range is 0°C to +40°C.

FCC Information

This device complies with Part 15 of the FCC Rules and with RSS-210 of Industry Canada. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or changes to this equipment. Such modifications or changes could void the user's authority to operate the equipment.

The output power of this device is so low that the SAR test is not required.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Charging the Unit

1. Connect the micro USB plug to the micro USB charging port on the unit.
2. Connect the standard USB plug end of the cable to a power USB port on a computer or other USB charging device.
3. A red light will be on while the unit is charging and turn off when unit is fully charged.

Note: 1. When the battery is low, the red LED will flash.

2. Suggest turning off the unit while charging, it can save more time than charging while powering on.

3. Charging the battery fully is normally about 5 hours via the standard PC USB socket.

Power on/off your device

The [Power on/off] button has 3 selections:

To left: Power off your device.

To middle: Power on your device. The Bluetooth Speaker will connect with the latest paired device.


To right: Enter pairing mode.

Pairing Your Device

1. Place the [Power on/off] button to the right, the unit will enter the pairing mode, the blue and red LED on the unit will flash alternately.
2. Turn your mobile's Bluetooth function, and set it to the pairing mode.
3. Set the mobile to search for the Bluetooth devices within 1 meter range and select 'SP101-xxx' from the list.
4. If pairing was successful, the blue LED will flash at a 5s interval. If battery is low, red LED will flash at a 5s interval instead of the blue LED.
5. If pairing fails, please repeat the process.



Note: In pairing mode, the Bluetooth Speaker will enter sleep mode if no device paired successfully after 4 minutes. You must turn off and on the Bluetooth Speaker.

Pairing Your Device via NFC


1. Turn on the NFC function of your mobile phone.
2. Place the [Power on/off] button to the right, the unit will enter the pairing mode, the blue and red LED on the unit will flash alternately.
3. Place your mobile phone to the indicator of .
4. Follow your mobile's indication to complete the pairing process.

Note: 1. The Bluetooth speaker just remembers the latest paired device.


Answering a call

When there is an incoming call, you will hear ringing through the Bluetooth speaker (some model may not support), and the  will flash. Press  to accept the call or answer the call via your mobile handset in the normal way.



Reject a call

When there is an incoming call, you will hear ringing through the Bluetooth speaker (some model may not support). Press  to reject the call.




Ending a call

Press  to end the call or end the call via your mobile handset in the normal way.






Adjusting the Volume

Press  or  to you desired volume level.

Mute function

During a call, you can press  to mute the Microphone of Bluetooth Speaker, and the  will be on in muting mode. Press  again to return to the normal. LED indicator

Music playback

- 1) Connecting to a Bluetooth A2DP cell phone or a Bluetooth transmitter.
 - a) Make sure your cell phone or Bluetooth transmitter has already established an A2DP connection with the SP101.
 - b) You can listen to your music from the SP101 while using your Bluetooth cell phone or other Bluetooth music device for playback.
 - c) Adjust the volume: Short press  button and  button to adjust the volume.
 - d) Press  to start or pause music playback. **When music is playing,  LED will flash. When music is paused,  LED will stop flashing.**



Note: The item d) depends on your mobile phone, some model may not support this function

2) 3.5mm audio input

a) Connect your mp3 player or mobile phone using a 3.5mm to 3.5mm audio cable. One end inserts into the input socket of the SP101 and the other end inserts into your music player's headphone output.

b) You can listen to your music from SP101 while playing music on your music player or mobile phone.

Remarks:

1. The blue LED indicator will be on.
2. When the music is transmitted to the SP101 using the 3.5mm jack, the Bluetooth function of the SP101 is invalid. If you want to use the Bluetooth function of the SP101, you have to unplug the 3.5mm audio cable.
3. If you plug in a music player to the 3.5mm jack of the SP101 while it connects with a Bluetooth device, the Bluetooth device will disconnect from the SP101. When you unplug the 3.5mm audio cable, the SP101 will connect to the last Bluetooth device.
4. When the music is transmitted to the SP101 using the 3.5mm jack, the  and  button of the SP101 is invalid, you must adjust the volume via mobile phone.
5. When the music is transmitted to the SP101 using the 3.5mm jack, please adjust your mobile phone's volume for the best performance.

Care and maintenance

Read the following recommendations before using the SP101. Following these you will be able to enjoy our product for many years.

1. Keep it dry and don't take it to damp places to avoid the product's internal circuit being affected.
2. Keep the product away from direct sunlight or hot places. High temperatures will shorten the life of electronic devices, destroy the battery or distort certain plastic parts.
3. Don't expose the product to cold areas. It may damage the internal circuit board.
4. Don't try to disassemble the product as it may get damaged if you are not professional.
5. Don't let it fall down onto the floor or other hard surfaces. The internal circuit might get damaged.
6. Don't use intensive chemical products or detergent to clean the product.
7. Don't scratch the surface with sharp things.