

User Manual

Bluetooth Stereo Box



BTST-6XXX

Thank You 002
- Box content

Overview 002

Getting Start 003
- Charge battery
- Power On
- Plug into the audio device
- Pairing
- Volume Control
- Set volume mode

Use with mobile phone..... 005
- Pairing
- To make a call
- To receive a Call
- To reject a Call

Use with computer device 006

Important Information 007

French 010

German..... 018

Spanish 026

Italian 034

Dutch 042

Portuguese..... 050

CE Statements 058

FCC Safety Statements 058

Warranty 059


Thank you

Thank you for purchasing the Bluetooth Stereo Box. The Bluetooth Stereo Box is designed for audio device users to have a high quality stereo sound and a wireless operating range up to 10 meters. Please read the instruction manual to make the best use of the Bluetooth Stereo Box. We hope you will enjoy the high quality stereo sound and power of Bluetooth wireless technology.


Box content

- Bluetooth Stereo Box
- Power Adapter
- User guide

Overview




1. Play on/off button
2. Power switch
3. Pairing button / track wheel
4. Audio port
5. Speaker
6. Charging port
7. LED
8. Volume button
9. Volume button
10. Microphone
11. Power adapter



2

Getting Start


1 Charge battery

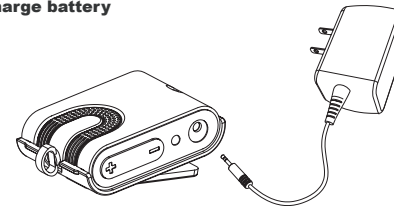

Note:


For the first time use, it takes 4 hours to fully charge the batteries and 2 hours afterward. With the batteries fully charged, the working time is around 10 hours and the standby time is around 160 hours.

2 Power On




- Use the power switch to turn on the power

3

4 Pairing


- Press and hold the pairing wheel on the Stereo Box for 6 seconds until the blue and red LEDs flash alternately. This device name is set to be "Bluetooth Stereo Box". If you are asked to enter pin-code during pairing, please enter 1234.
(Note: The "1234" is default pin-code pre-stored in this Stereo Box.)
from "Use with mobile phone"

5 Volume Control

- Use the volume buttons on the Stereo Box to adjust volume.

Use with mobile phone**1 Pairing**

Press and hold the pairing/track wheel button on the Stereo Box for 6 seconds to set the Stereo Box into pairing mode. The blue and red LEDs will be flashing when the Stereo Box is in pairing mode. To properly perform pairing procedure on your mobile phone, please refer to the user manual of your mobile phone for its own pairing instruction. This device name is set to be "Bluetooth Stereo Box". If you are asked to enter pin-code during pairing, please enter 1234.
(Note: The "1234" is default pin-code pre-stored in this Stereo Box.)

**2 To make a call**

- Dial out the number from your mobile phone.
- Voice is automatically transferred to the headset.

3 To receive a Call

1. When there is an incoming call, press the answer button to answer the call and the audio channel will be switched to the mobile phone.



2. Press the Volume control button to adjust the volume.
3. When finish talking, press the answer button to end the call and the audio channel will be switched back to the audio device.

Note:

To have music streaming, make sure your mobile phone supports Bluetooth Stereo functions.

4 To reject a Call

- Press the reject button on the mobile phone to reject a call.

5 Speaker function

- The Speaker is a special design for user's comfort. When making or receiving a phone call, users have no need to wear the earphone.

Note:


The Speaker is not for listening music, only for mobile handsfree purpose.

Use with computer device

Without the Stereo Adapter, the Stereo Box can be used with PC, Notebook or PDA that support Bluetooth Stereo functions (A2DP Profile) for Stereo Sound Streaming.

Music playback

The Stereo Box provides a track wheel that allows music playback on Windows Media Player in PCs that support Bluetooth Stereo functions.



Note:

- "A2DP profile" is required to support stereo sound.

Use with audio player and mobile phone at same time.

1. The Stereo Box needs to be paired and connected with both devices.
2. When there is an incoming call, a notice tone will be played from the Stereo Box.
3. Users can press the answer button on the Stereo Box to answer the call or press the reject button on the mobile phone to reject the call.

Important Information

Product care

- Use of non-original accessories may result in performance deterioration, injury, products damage, electronic shock, and warranty termination.
- Attempt to disassemble your Stereo Box or stereo adapter may damage it, and the warranty will be void.
- Always store the Bluetooth Stereo Box with the power turned off.
- Avoid exposing the Bluetooth Stereo Box to direct sunlight or other heat source.
- Do not expose the Bluetooth Stereo Box to water or other liquids.

Children

Please keep the Stereo Box and stereo adapter away from children, as the small parts may cause choking hazard.

Battery Information

- New batteries
 - For time first time use, please charge the battery for at least 4 hours.
- Battery care
 - Only qualified Service Centers are authorized to remove or replace the battery.
 - The rechargeable battery has a long service life if treated with care.
 - The battery can only be charged in a temperature range of -10C to 45C.
 - The battery capacity may be reduced if operating in a cold environment.

About Pairing

What is pairing?

Pairing is a process of associating Bluetooth devices with each other. It will establish a permanent security link between the devices and enable quick access to the services provided without the need to enter passkeys.

Bluetooth Passkey

The Bluetooth Stereo Box has a default passkey 1234 for pairing, which is stored in its internal memory. Usually you are required to enter the passkey 1234 in a pairing process with a Bluetooth mobile phone or other devices; however it depends on the kind of Bluetooth device that the Stereo Box is connected to. Please refer to the users' manual of the devices for the specific operation.

Note:

The paired devices remain paired even when both of the devices are powered off, or when a service connection is interrupted or stopped.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.**
- (2) This device must accept any interference received, including interference that may cause undesired operation.**

Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement: This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

FAQ

1. Can I change Bluetooth passkey?
No, the Bluetooth passkey is written into the device when it manufactured and cannot be changed.
2. Can I use Stereo Box with audio device and mobile phone at same time?
Yes, the Stereo Box can be used with audio device and mobile phone at same time. However, there could be some compatibility issues on certain brands of models of mobile phones.
3. Can I use Stereo Box while it is in charging mode?
No, the Stereo Box cannot be used while it is in charging mode.
4. What is the operating range of Bluetooth Stereo Box?
The operating range of Bluetooth Stereo Box is up to 10 meters.
5. How come the track control does not work with my MP3 player?
The track control is a special feature designed for Windows Media Player. It doesn't apply to MP3 player because most of MP3 players do not support such functions.

Troubleshooting

1. The track control is not working.
 - The track control is designed for Windows Media Player only.
 - Make sure that you are using Windows Media Player.
2. Music is on and off when the Stereo Box is paired with audio device/pc and mobile phone.
 - When you try to use Stereo Box and audio device / pc at same time, there could be some compatibility issues on certain brands of models of mobile phones. However, this problem shouldn't occur when use Stereo Box with single device.