

Dongguan JUTONG Electronics Co.,Ltd

Specification For Approval

Provider: Dongguan JUTONG Electronics Co.,Ltd

Model No.: DA36


Part name: Integral Antenna

—

Approval: _____

Date: 2018-9-27


Structure Drawing




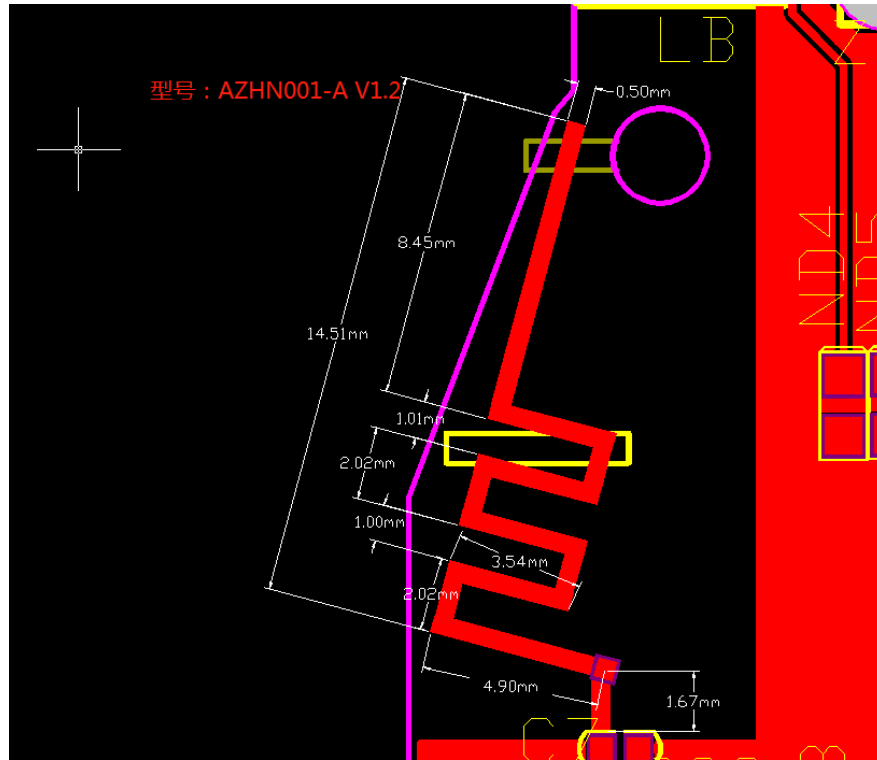


RF Antenna Assembly

Test/Position	Gain/Free Space		
	2400	2450	2500
Frequency(MHz)	2400	2450	2500
Ant. Port Input Pwr.(dBm)	0.00	0.00	0.00
Tot.Rad.Pwr.(dBm)	-2.95	-3.00	-3.11
Peak EIRP(dBm)	0.00	-0.55	-0.68
Directivity(dBi)	2.46	2.46	2.44
Efficiency(dB)	-2.95	-3.00	-3.11
Efficiency(%)	50.72	50.08	48.81
Gain(dBi)	0.00	-0.55	-0.68



2400MHz

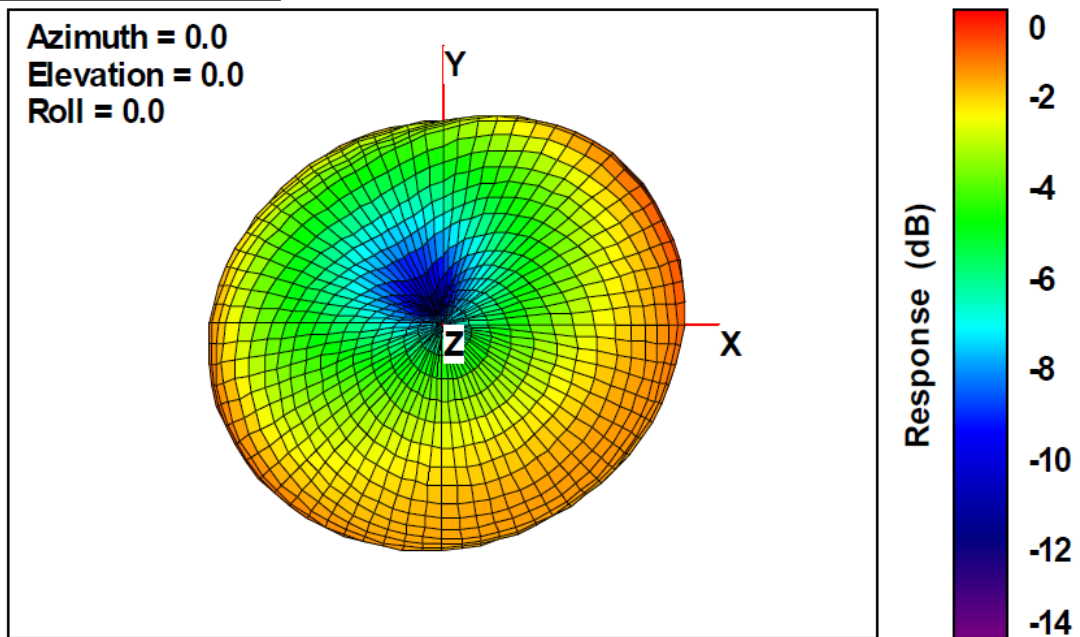

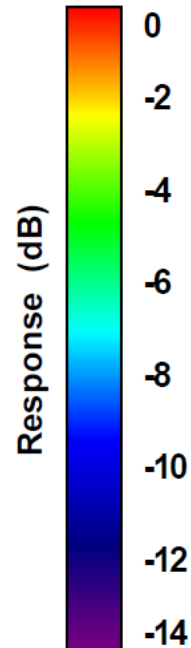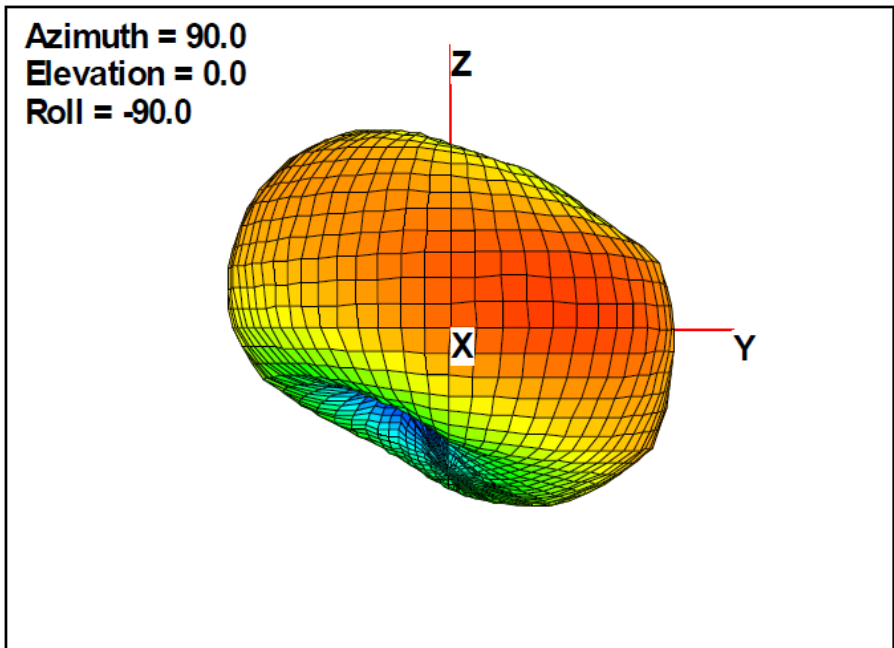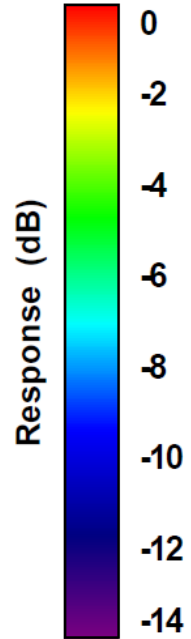
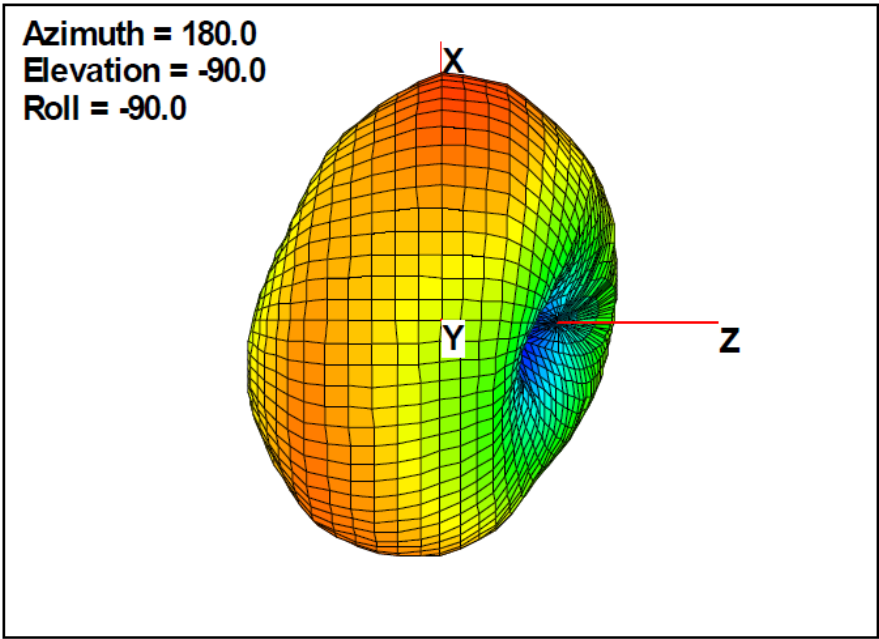


2450MHz



Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

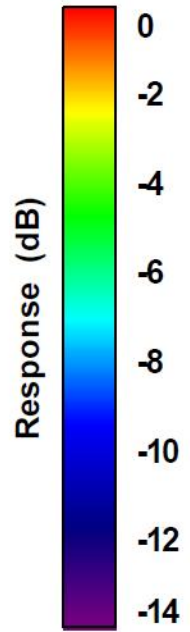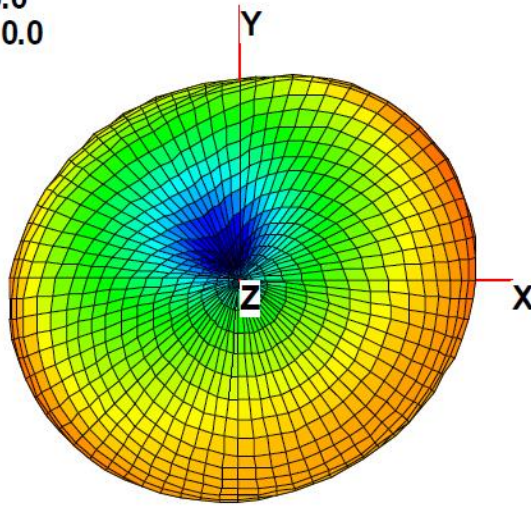

Azimuth = 180.0
Elevation = -90.0
Roll = -90.0

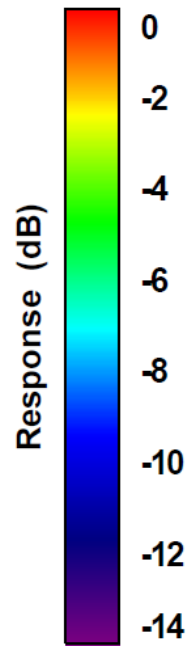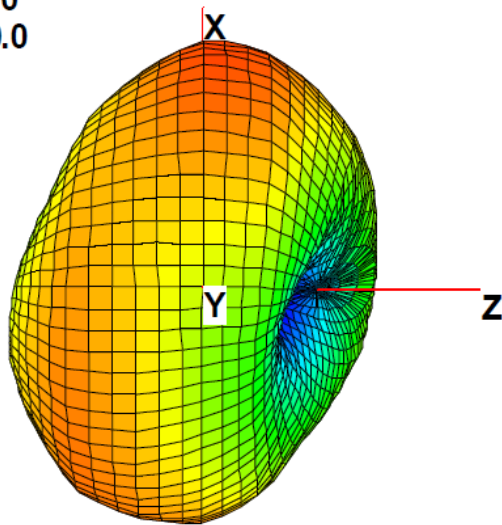

Azimuth = 90.0
Elevation = 0.0
Roll = -90.0

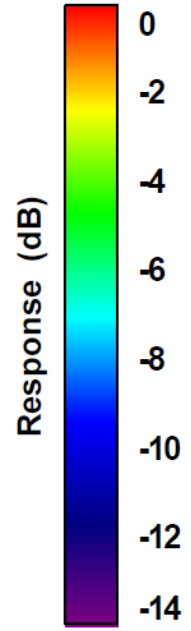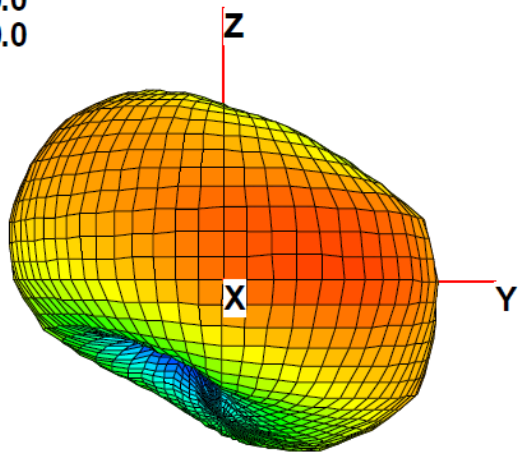

2500MHz

Azimuth = 0.0
Elevation = 0.0
Roll = 0.0

