


RX14V3-A

Comba	
RX14V3-A	
Public Safety UHF and VHF Dualband Bi-Directional Amplifier	
S/N:	
ERP#:	
P/N:	
Print barcode	

Comba	
Model No.: RX14V3-A	
FCC ID: PX8RX14V3-A	
This is a 90.219 class A device complies with FCC part 90 signal booster rules.	
www.comba-telecom.com	

Comba	
WARNING. This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. You MUST register Class B signal boosters (as defined in 47 CFR 90.219) online at www.fcc.gov/signal-boosters/registration. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.	

Comba	
WARNING. Install in Accordance with the applicable National Fire Protection Association Installation Standard for each type of control unit, such as NFPA 1221	
Servicing is to be performed only while the unit is electrically disconnected from the branch-circuit supply	
"CAUTION – De-Energize Unit Prior To Servicing."	
For Field Connections, Use Wires Suitable For At Least I 90 ° C (194 ° F)	
Input: 100-240V~ 50-60Hz	
Max. 4.5A	
Ambient air temperature: -40 to +55 °C	
Type 4 enclosure	

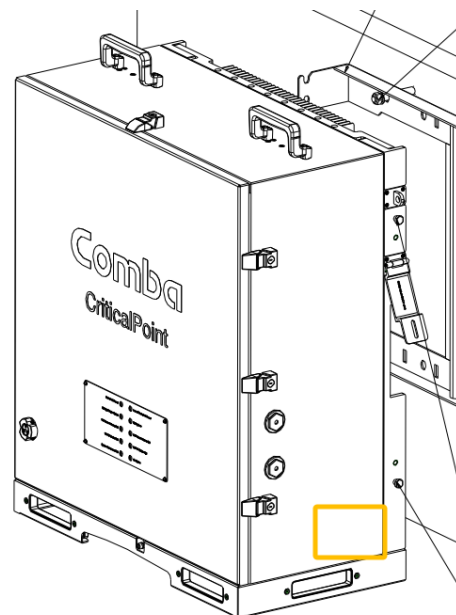

801189
ANSI/CAN/UL 2524