

# BW-301

## Waterproof Bluetooth Speaker





## 1. Features

- BT CSR 4.0 Wireless.
- Waterproof Grade: IPX 6.
- Battery Capacity: 6000mAh, with power bank function.
- AUX IN Function.
- Subwoofer + Tweeter + Passive Radiator, Powerful Sound.
- Party Size.

## 2. Specification

Product Size	210*230*127 mm	
Charging Time	$\geq$ 1A Adaptor: 6~7 Hours	
Music Running Time	>6 Hours	
Acoustic Parameters	Output Power	3W X 2 + 9W (RMS)
	Frequency Response	100Hz-18KHz
	S/N	>70dB

## 3. Function Indication

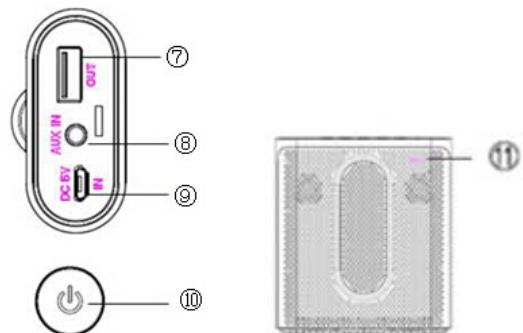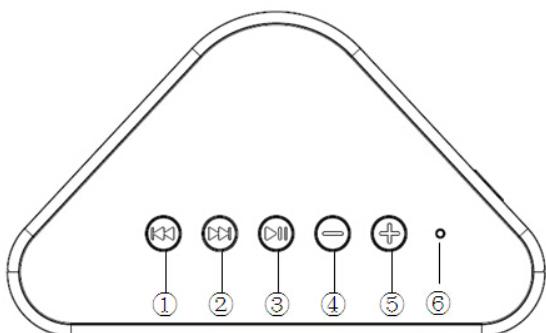

- ① Play Backward
- ② Play Forward
- ③ Play / Pause
- ④ Volume Down
- ⑤ Volume Up
- ⑥ LED Indicator

- ⑦ USB Output for Charging (other device)
- ⑧ AUX IN
- ⑨ Micro USB Input for Charging
- ⑩ Power Button
- ⑪ Charging LED Indicator

## 4. Operation Description

### Power On / Pairing

- Long press , there will be prompt tone, and the LED Indicator will flash in blue, then keep flashing in red & blue for new pairing.
- Turn on the BT wireless on your device. Search and select “BW-301” (enter “1234” if password is requested).
- The LED Indicator will keep flashing in blue when the speaker is successfully paired to your device.

### Volume / Song Selection

- Short press  to adjust the volume, there will be prompt tone when in max volume.
- Short press  for Play Backward / Play Forward.
- Short press  for pause, short press again for play.

### AUX IN Function

- Using the 3.5mm line in cable to connect your audio device and speaker. Once connected, the BT wireless will be held automatically.
- Short press  to adjust the volume. Operate other functions by your device.

### Power Off

- Long press , there will be prompt tone, and the power will be off.
- For saving power, the speaker will be turned off automatically when it is not pairing up to 10 minutes.

### Reset Pairing

- If the BT wireless on your smartphone keep open, and BW-301 power off, long press  to turn on the speaker, the LED Indicator will flash in blue, BW-301 will be paired with your phone automatically.
- Long press  if need to pair with another device when the speaker is paired, the LED Indicator will keep flashing in red & blue for new pairing.

### Charge In

- Open the watertight seal gently.
- Connect the USB interface to adaptor.
- Connect the Micro USB interface to  on speaker.
- 4 pieces blue charging LED Indicator will flash when charging in, and it will stop flashing after fully charged.

- To achieve the best performance, please fully charge it before use.

### Charge Out (power bank function)

- Open the watertight seal gently.



- Connect the USB interface of charging cable for your device to **OUT** on speaker.
- The charging LED Indicator will show the power status of the speaker. When it is not enough to support power bank function, the speaker will stop charging out, and the charging LED Indicator will be off.
- Do not charge out when playing music.

## 5. Standard Package

● BW-301 Waterproof & BT 4.0 Wireless Subwoofer Speaker.....	1
● USB to Micro USB Charging Cable.....	1
● User Manual.....	1

## 6. Attention

- Do not put under water.
- Do not open the watertight seal with dripping hand.
- Keep away from sharp objects.
- Do not place near heat or microwave ovens.
- Please power off when finish using the speaker.



### WARNING! IMPORTANT INSTRUCTIONS FOR THIS PRODUCT

- For safety, please read this manual seriously before using this product.
- This product can not be dropped into water.
- Do not disassemble, repair or modify this product by yourself.
- If the battery is replaced by an incorrect type, there is a risk of explosion.
- This product should not be placed direct under the sun for a long time.
- This product is not a toy, children should use it under the guidance of adults.
- This product contains the recyclable lithium battery, dispose it to the Recycle Bin for recycling please.
- Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,

uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

- FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be

installed and operated with a minimum distance of 20cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.