

1. Manufacturer: OneWave Electronic Co., Ltd.
2. Address: 1F, No. 151, Li Gong Street, Beitou District, Taipei City 112, Taiwan
3. Model: BLE ANT

Antenna efficiency

Unit: MHz dB dBi %


2200	-8.66	-3.77	13.63
2210	-8.29	-3.5	14.83
2220	-7.99	-3.18	15.88
2230	-7.7	-2.93	16.97
2240	-7.64	-2.82	17.21
2250	-7.43	-2.63	18.06
2260	-7.22	-2.36	18.98
2270	-6.89	-1.98	20.49
2280	-6.55	-1.64	22.14
2290	-6.22	-1.32	23.89
2300	-5.99	-1.19	25.15
2310	-5.91	-1.15	25.67
2320	-5.77	-1.13	26.51
2330	-5.53	-1.05	27.96
2340	-5.21	-0.8	30.11
2350	-4.98	-0.63	31.77
2360	-4.75	-0.47	33.47
2370	-4.62	-0.45	34.5
2380	-4.55	-0.41	35.11
2390	-4.46	-0.3	35.83
2400	-4.36	-0.28	36.63
2410	-4.26	-0.27	37.52
2420	-4.22	-0.34	37.85
2430	-4.2	-0.33	38
2440	-4.19	-0.42	38.14
2450	-4.21	-0.57	37.92
2460	-4.26	-0.74	37.47
2470	-4.4	-1.02	36.32
2480	-4.56	-1.39	35.02
2490	-4.87	-1.94	32.55
2500	-5.14	-1.99	30.64
2510	-5.42	-2.09	28.72
2520	-5.67	-2.2	27.11
2530	-5.99	-2.49	25.18



Antenna


3D

direction

diagram

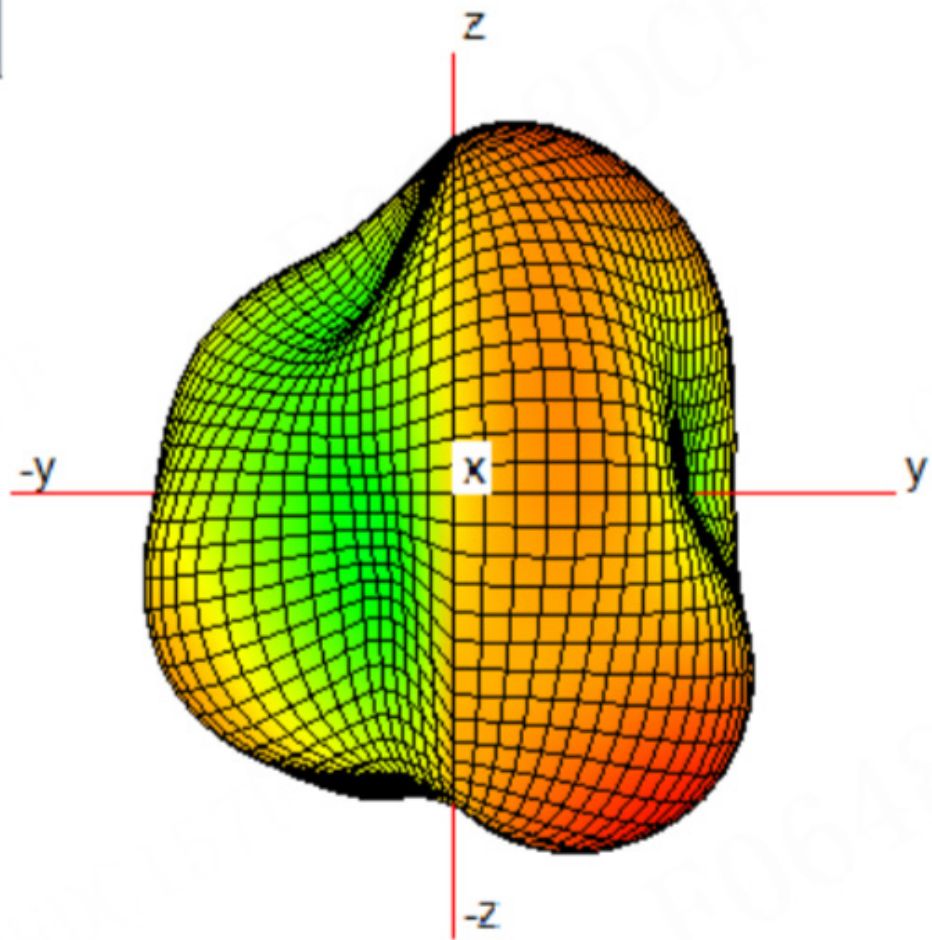

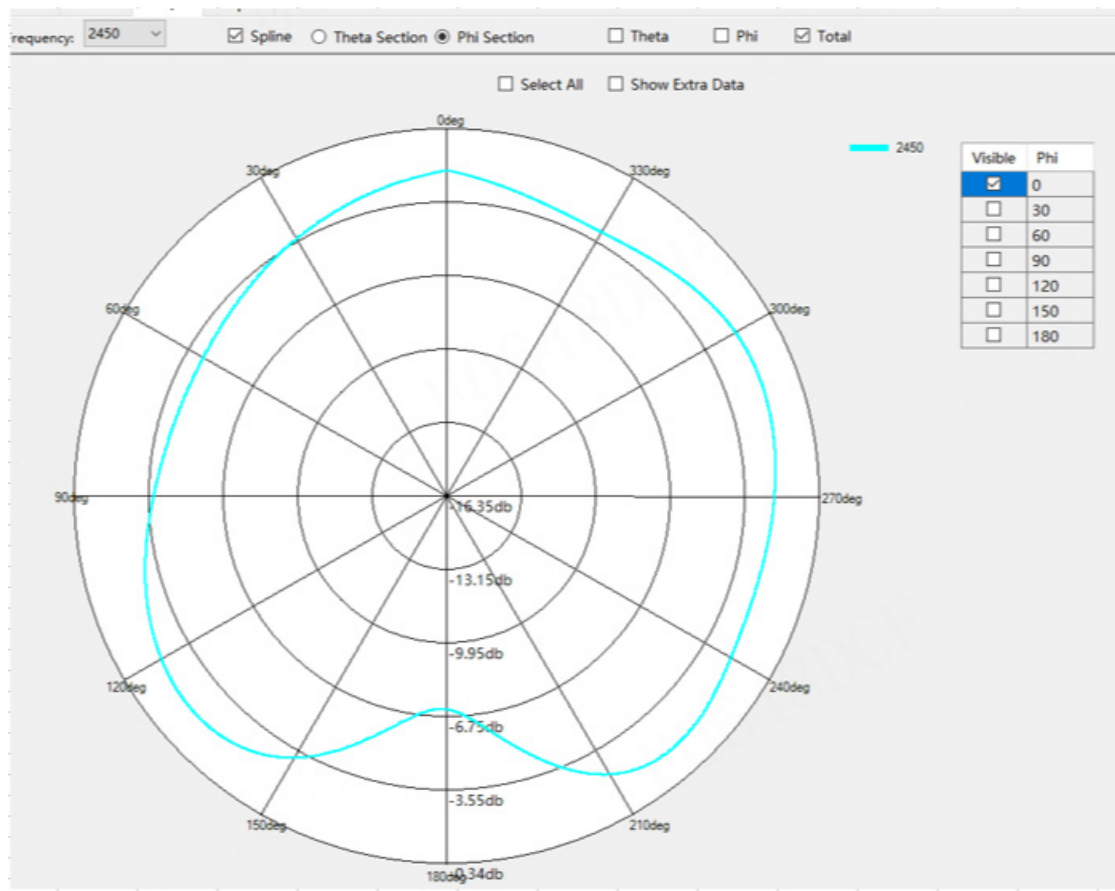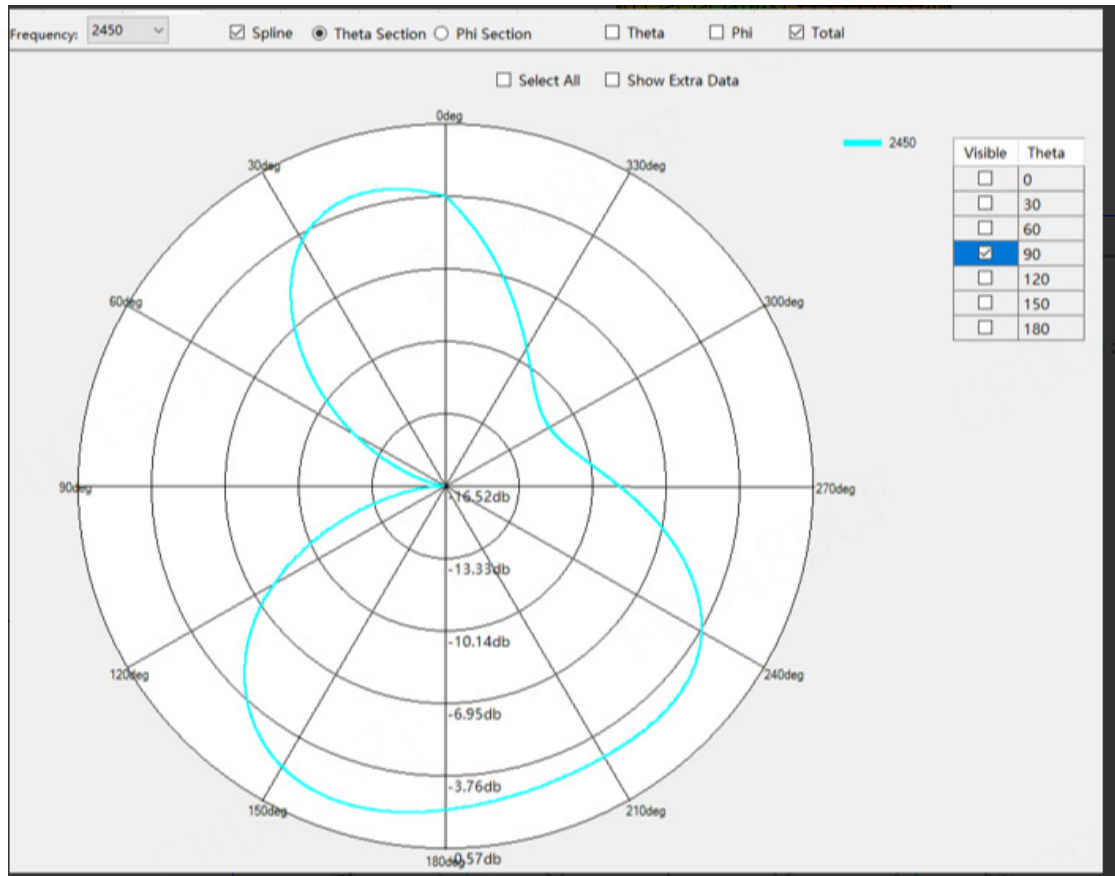

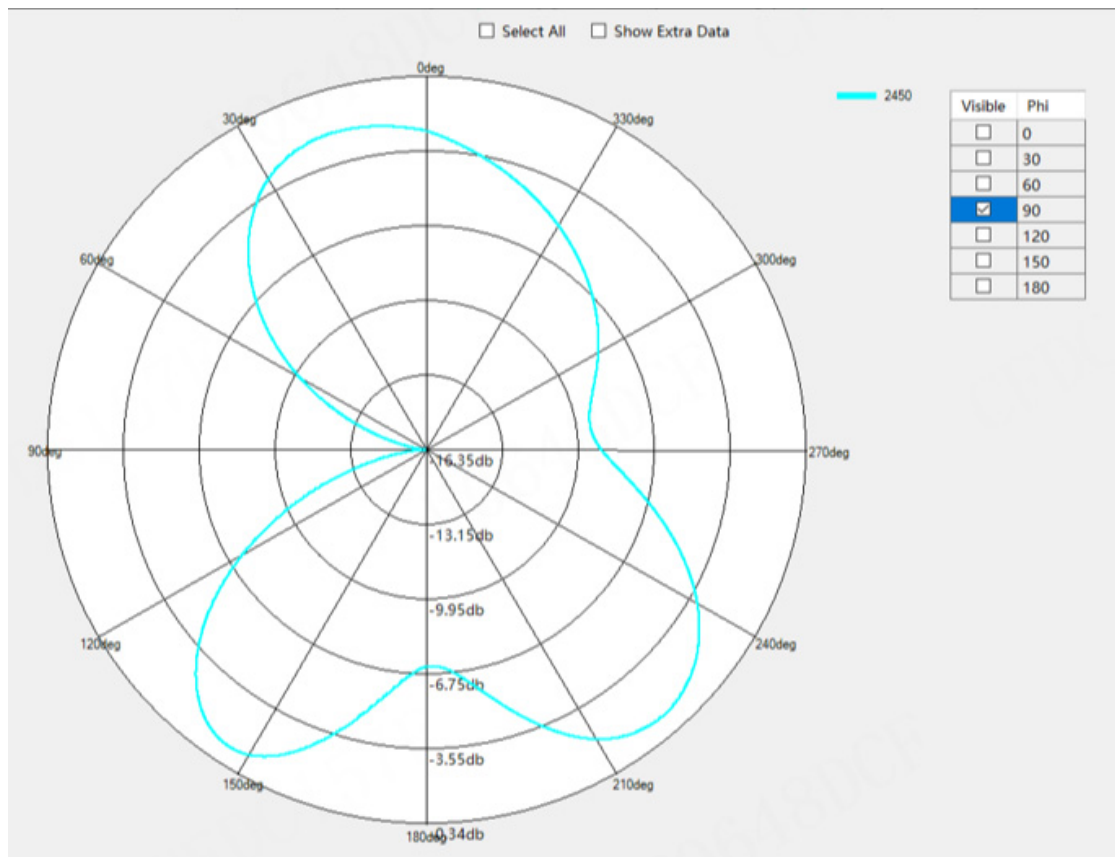

4. Antenna Photo

