

Bluetooth Speaker

Model Name: BT-125

Brand Name: iCreation


FCC ID: QMHBT125

Quick Start Guide

The detailed product description below will help you to have a better understanding of our product. In order to use it correctly, please read the relevant information carefully before you use it.

1. Brief Introduction

Overview

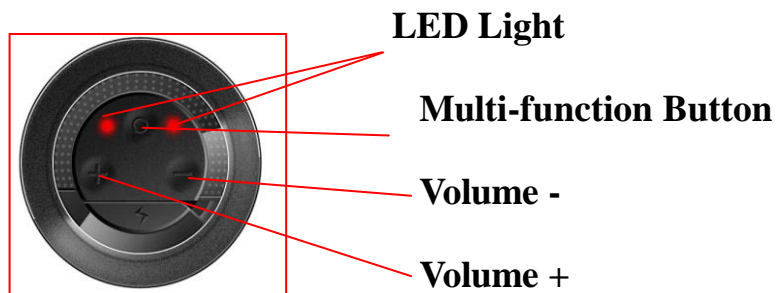

2. Use Instruction

Function Key	Item	Function	Mode	Operate
Multi-function key/power on/off	One Key	Play/Stop	Music Play	Press Multi-function key 1 time
		Paired With	Power Off	Press Multi-function key 5 seconds
		Last Number Redial	Standby	Press Multi-function key 2 times
		Voice Dial	Standby	Press Multi-function key and VOL+
		Answer Call	Standby	Press Multi-function key 1 time
		Reject Call	Standby	Press Multi-function key 2 seconds
		End Call	Call	Press Multi-function key 1 time
Volume+(VOL+)	One Key	Mute Off/On	Call	Press VOL+ and VOL-
		Next Song	Play	Press VOL+ 2 seconds
		Volume Up	Standby/Call	Press VOL+ 1 time
Volume-(VOL-)	One Key	Previous Song	Play	Press VOL- 2 seconds
		Volume Down	Standby/Call	Press VOL- 1 time

Note: This product has 3 keys: Multi-function key, Volume+, Volume-, Specific Instruction Please See Above.

2.1 Battery/Charger

Connect with computer or charger through charging line

Note: charge time about 3-4 hours

▲ Make sure the BT-125 is in the off mode before inserting the charging line or

charging

2.2 Power on/off

2.2.1 Power on:

Hold the MFB for 3 seconds until you see blue LED flashing to power on the device.

2.2.2 Power off:

In standby status, hold the MFB for 3 seconds until you see the red LED flashing to power off the device.

2.3 Volume Adjust:

2.3.1 Volume Up: Press VOL+ once every time to adjust the volume

2.3.2 Volume Down: Press VOL- once every time to adjust the volume

2.4 Paired with and connecting

- A. When the device is in the off mode, press the on/off button for 5 seconds until the red & blue LEDs flashing alternately, then enter pairing mode:
- B. Open Bluetooth function of your mobile phone or other device
- C. Connect

Setting your Bluetooth device

1. Add or search device: when BT-125 appear, select it.
2. Input password: 0000

2.5 Calling Operate

2.5.1 Calling

Answer the call: short press multifunction key to answer an incoming call.

Reject the call: press and hold the MFB for 2 seconds to reject the call.

End a call: After calling, short press multifunction key to end the call.

Redial: short press MFB twice to redial the last call.

Mute: Press VOL+ and VOL- to mute the MIC

Synchronous call: answer the other call, simply press the MFB.

2.5.2 Voice Dialing (This function need the support of the mobile phone)

When in standby mode, short press the MFB and VOL+ then you hear note tone for voice dialing.

3.Trouble Shooting

3.1 Volume is not high enough

3.1.1.Increase the volume of mobile phone/device or BT-125 volume

3.1.2.Ensure that the device has been charged

3.2 Hearing Distortion

-
- 3.2.1. Lower BT-125, Mobile phone/device volume.
 - 3.2.2. If low battery capacity, please charge it.
 - 3.3 Can not paired with Bluetooth device
 - 3.3.1. Make sure that your mobile phone/device is compatible with Bluetooth.
 - 3.3.2. Please pair with the device again (refer to 2.4 Paired with and connecting)
 - 3.4 Signal loss or distortion
 - 3.4.1. Move BT-125 to the place near the mobile phone/device
 - 3.4.2. Ensure charged
 - 3.4.3. Power off the BM6, Mobile phone/Device, then re power on.

4. Safety Information

For your personal and property safety, please read these safety warnings and alerts.

- 4.1 Fire and shock hazards
 - 4.1.1. Do not expose your BT-125 into Liquid, Vapor, Moisture and Rain.
 - 4.1.2. Do not drop, disassemble, open, crush, bend, deform, puncture, shred, microwave, fire, defaced, or insert something into the speakerphone. Those actions will result in electric shock.
 - 4.1.3. Only use dry cloth to clean the speaker.
 - 4.1.4. Do not expose the speaker in too high or too low temperature.
 - 4.1.5. Do not expose the speaker under the direct sunlight for a long time.
 - 4.1.6. Do not put the speaker near the place, such as fire stoves, candles or fireplace.
- 4.2 Battery/Charger Damage
 - 4.2.1. Do not drop the BT-125 into the fire, Battery explosion will cause personal injury or death.
 - 4.2.2. Please charge the BT-125 under the manual guide.
 - 4.2.3. Do not attempt to disassemble or forcibly take apart the built-in battery, these actions may cause electric shock.
 - 4.2.4. Do not scrub the speaker when it is charging.

Important Regulatory Information

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.