


Nokia 2127i User Guide

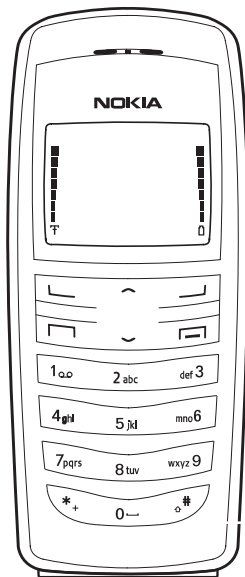

LEGAL INFORMATION

The wireless phone described in this guide is approved for use in CDMA 1900 networks and also receives signals from the GPS location system.

Part No. 9247599, Issue No. 1

Copyright © 2006 Nokia. All rights reserved.

Nokia, Nokia Connecting People, Nokia 2127i, Xpress-on, Pop-Port, and the Nokia Original Enhancements logos are trademarks or registered trademarks of Nokia Corporation. Other company and product names mentioned herein may be trademarks or trade names of their respective owners.

US Patent No 5889770 and other pending patents.

T9 text input software Copyright ©1999-2006. Tegic Communications, Inc. All rights reserved.



Includes RSA BSAFE cryptographic or security protocol software from RSA Security.

The information contained in this user guide was written for the Nokia 2127i product. Nokia operates a policy of ongoing development. Nokia reserves the right to make changes to any of the products described in this document without prior notice.

UNDER NO CIRCUMSTANCES SHALL NOKIA BE RESPONSIBLE FOR ANY LOSS OF DATA OR INCOME OR ANY SPECIAL, INCIDENTAL, AND CONSEQUENTIAL OR INDIRECT DAMAGES HOWSOEVER CAUSED. THE CONTENTS OF THIS DOCUMENT ARE PROVIDED "AS IS." EXCEPT AS REQUIRED BY APPLICABLE LAW, NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE MADE IN RELATION TO THE ACCURACY AND RELIABILITY OR CONTENTS OF THIS DOCUMENT. NOKIA RESERVES THE RIGHT TO REVISE THIS DOCUMENT OR WITHDRAW IT AT ANY TIME WITHOUT PRIOR NOTICE.

EXPORT CONTROLS

This device may contain commodities, technology, or software subject to export laws and regulations from the U.S. and other countries. Diversion contrary to law is prohibited.

FCC/INDUSTRY CANADA NOTICE

Your device may cause TV or radio interference (for example, when using a telephone in close proximity to receiving equipment). The FCC or Industry Canada can require you to stop using your telephone if such interference cannot be eliminated. If you require assistance, contact

your local service facility. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. . Any changes or modifications not expressly approved by Nokia could void the user's authority to operate this equipment.

Contents

For your safety.....	6
Welcome.....	8
1. Phone at a glance	11
2. Set up your phone	17
3. Text entry	25
4. My Account	28
5. Messaging	29
6. VirginXtras	41
7. Recent calls	44
8. Contacts	46
9. Settings	56
10. Gallery.....	71
11. Tools	72
12. Games	82
13. Enhancements	83
14. Purchasing accessories.....	85

15. Battery information.....	86
Care and maintenance.....	90
Additional safety information	92
Index	98

For your safety

Read these simple guidelines. Not following them may be dangerous or illegal.
Read the complete user guide for further information.



SWITCH ON SAFELY

Do not switch the phone on when wireless phone use is prohibited or when it may cause interference or danger.



ROAD SAFETY COMES FIRST

Obey all local laws. Always keep your hands free to operate the vehicle while driving. Your first consideration while driving should be road safety.



INTERFERENCE

All wireless phones may be susceptible to interference, which could affect performance.



SWITCH OFF IN HOSPITALS

Follow any restrictions. Switch the phone off near medical equipment.



SWITCH OFF IN AIRCRAFT

Follow any restrictions. Wireless phones can cause interference in aircraft.



SWITCH OFF WHEN REFUELING

Do not use the phone at a refueling point. Do not use near fuel or chemicals.



SWITCH OFF NEAR BLASTING

Follow any restrictions. Do not use the phone where blasting is in progress.



USE SENSIBLY

Use only in the normal position as explained in the product documentation. Don't touch the antenna unnecessarily.



QUALIFIED SERVICE

Only qualified personnel may install or repair this product.



ENHANCEMENTS AND BATTERIES

Use only approved enhancements and batteries. Do not connect incompatible products.



WATER-RESISTANCE

Your phone is not water-resistant. Keep it dry.



BACKUP COPIES

Remember to make backup copies or keep a written record of all important information stored in your phone.



CONNECTING TO OTHER DEVICES

When connecting to any other device, read its user guide for detailed safety instructions. Do not connect incompatible products.



SOS

EMERGENCY CALLS

Ensure the phone is switched on and in service. Press **End** as many times as needed to clear the display and return to the main screen. Key in the emergency number, then press **Call**. Give your location. Do not end the call until given permission to do so.

Welcome

Congratulations on your purchase of the Nokia 2127i mobile phone. Your phone provides many functions which are practical for daily use, such as a hands-free speakerphone, alarm clock, calculator, calendar, and more. To personalize your phone, you can set your favorite ringing tones.

■ About your device

The wireless phone described in this guide is approved for use on CDMA 1900 networks and also receives signals from the GPS location system. Contact Virgin Mobile for more information about networks.

When using this phone, or any of its features, obey all laws and respect privacy and legitimate rights of others.



Warning: To use any features in this phone, other than the alarm clock, the phone must be switched on. Do not switch the phone on when wireless phone use may cause interference or danger.

■ Network Services

To use the phone you must have service from Virgin Mobile. Many of the phone's features depend on your service provider's network to function. These Network Services may not be available on all networks or you may have to make specific arrangements with Virgin Mobile before you can utilize Network Services. Virgin Mobile may need to give you additional instructions for their use and explain what charges will apply. Some networks may have limitations that affect how you can use network services. For instance, some networks may not support all language-dependent characters and services.

■ Shared memory


The following features in this phone may share memory: contacts, text messages, ringing tones, calendar, and games. Use of one or more of these features may reduce the memory available for the remaining features sharing memory. Your phone may display a message that the memory is full when you try to use a shared memory feature. In this case, delete some of the information or entries stored in the shared memory features before continuing. Some features, such as messages and ringing tones, may have a certain amount of memory specially allotted to them in addition to the memory shared with other features.

■ Get help

Find your phone label

If you need help, the Nokia Care Contact Center is available for assistance. Before calling, we recommend that you write down the electronic serial number (ESN) of your phone and have it available.

The ESN is found on the type label, which is located beneath the battery on the back of the device. See ""Remove the back cover,"" p. 18 and ""Remove the battery,"" p. 18.



Contact Virgin Mobile


To contact Virgin Mobile's Customer Support department for information about your phone, account history, call coverage area, and specific features available to you, such as call forwarding or voicemail:

- Go to www.virginmobileusa.com.
- Dial ***VM** from your Virgin Mobile phone.
- Dial 888-322-1122 from any phone.

Accessibility solutions

Nokia is committed to making mobile phones easy to use for all individuals, including those with disabilities. For more information visit the web site at www.nokiaaccessibility.com.


1. Phone at a glance

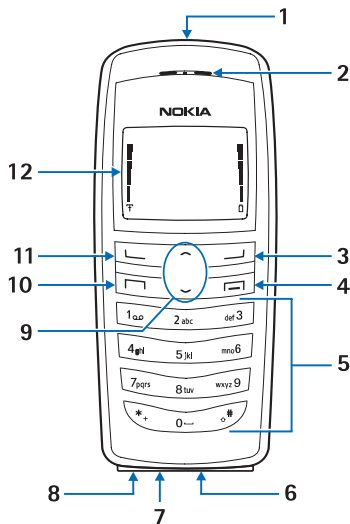

- | | |
|------------------------------|----------------------------|
| Power key and flashlight (1) | Microphone (7) |
| Earpiece (2) | Charger port (8) |
| Right selection key (3) | Scroll up and down key (9) |
| End key (4) | Call key (10) |
| Keypad (5) | Left selection key (11) |
| Connection port (6) | Screen (12) |

■ The main screen

The main screen appears when your phone is in idle mode.



Signal strength (1)—A higher bar indicates a stronger network signal.

Battery level (2)—A higher bar indicates more power in the battery.

Menu (3)—Press the **Left selection** key to select this option.

Contacts (4)—Press the **Right selection** key to select this option.

■ Quick keys

Scroll down to access the list of entries in the phone book (contents of the contacts list).

■ Indicators and icons

Icon

















Indicates...



You have one or more text messages.
See "Read a message," p. 32.



You have one or more voice messages.
See "Voice messages," p. 38.

Icon	Indicates...
	You are making a call with the phone. See "Make a call," p. 22.
	Your phone keypad is locked. See "Keyguard," p. 24.
	Your phone is set to the silent profile. The icon is also present whenever you silence the ringing tone. See "Profiles," p. 56.
	The alarm clock is set to On. See "Alarm clock," p. 72.
	The countdown timer is running. See "Countdown timer," p. 78.
	The stopwatch timing is running in the background. See "Stopwatch," p. 79.
	Speakerphone is enabled.
	The timed profile is selected. See "Profiles," p. 56.
 , or  , or 	An enhancement is connected to the phone.
 or 	Voice privacy encryption is active (or is not active) in the network.
 or 	Location info sharing is set to Emergency or On. See "Location info sharing," p. 58.
	The phone is in an 1XRTT network. See "Network Services," p. 8.

■ Get the most out of this guide

The following sections illustrate the various components of your phone. Familiarize yourself with these sections to help you understand the instructions that follow.

This guide uses certain terms for the steps that you are asked to perform:

- "Press" means to press and release a key quickly. For example, press 7 means press the key on the keypad that is labeled with the number 7 and the letters pqrs.
- "Press and hold" means to press and hold a key for 2–3 seconds, then release the key.
- Selection keys are used to select menu options. To select an option, press the selection key below the menu item on the phone screen.
- Scroll keys are used to move up and down in the menus.
- Press **Call** to place a call or to answer an incoming call.
- Press **End** to end a call or press and hold to return to idle mode at the main screen.

■ Phone menus

Phone features are grouped according to function and are accessed through the main menus. Each main menu contains submenus and lists from which you can select or view items and customize your phone features. You can access these menus and submenus by scrolling with the up and down scroll key.

Scroll method

1. At the main screen, select *Menu*, and scroll through the main menu using the up and down scroll key.

2. When you arrive at a menu, press **Select** (the **Left Selection** key) or **Connect** to enter submenus.
 - Select **Back** from the submenu level to return to the previous menu.
 - Select **Exit** from the main menu level or press **End** to return to the main screen from any menu or submenu.

Shortcuts

You can use a shortcut to go directly to almost any menu or submenu and to activate most features.

At the main screen, select **Menu**; then within 3 seconds press the key or keys associated with the menu function you would like to view or activate.

For example, to quickly display your phone number, select **Menu** 5-9 from the main screen (**Menu** > 5 **Contacts** > 9 **My phone no.**). After a brief pause, the phone displays your phone number.

Common shortcuts

Shortcut	Keys
My Account	Menu 1
Check balance	Menu 1-1
Top-Up	Menu 1-2
VirginXtras	Menu 3, or press and hold 0
Virgin Alerts	Menu 2-1-3

In-phone help

Many features have brief descriptions (help text) that you can view on the phone.

To view these descriptions, scroll to a feature and wait for about 10 seconds.

If needed, select [More](#) to view all of the description or [Back](#) to exit.

In order to view the descriptions, you must first activate help text.

1. At the main screen, select [Menu](#) > [Settings](#) > [Phone settings](#) > [Help text activation](#).
2. Select [On](#) to display help text or [Off](#) to turn this feature off.

2. Set up your phone

■ The antenna

Your phone has an internal antenna located towards the top of the phone. Hold the phone as you would any other telephone with the antenna area pointed up and over your shoulder.



Note: As with any other radio transmitting phone, do not touch the antenna unnecessarily when the phone is switched on. Contact with the antenna affects call quality and may cause the phone to operate at a higher power level than otherwise needed. Avoid contact with the antenna area when operating the phone to optimize antenna performance and battery life.



■ The battery




Important: Always switch the phone off and disconnect the charger before removing the battery.

Before removing the cover, always switch off the power and disconnect the charger and any other phone. Avoid touching electronic components while changing the covers. Always store and use the phone with the covers attached.

Set up your phone

Remove the back cover

1. With the back of the phone facing you, push down on the button on the back of the phone.
2. Slide the back cover toward the bottom of the phone and remove.



Remove the battery

After you have removed the back cover, insert your finger into the finger grip and lift the battery from its compartment.


Replace the battery

Always use original Nokia batteries. See "Battery information," p. 86.

1. Position the battery so the gold-colored contacts match up with those on the phone.

The battery label must face away from the phone.

2. Insert the battery, gold-colored contact end first, into the battery slot.
3. Push down on the other end of the battery to snap the battery into place.




Replace the back cover

Slide the back cover toward the top of the phone until you hear a click and see the back cover release button.

Charge the battery


1. Plug the charger transformer into a standard AC outlet.
2. Insert the charger output plug into the round jack at the bottom end of the phone.

After a few seconds, the battery indicator in the display starts to scroll from bottom to top. If the battery is completely drained, it may take a few minutes before the charging indicator appears on the display or any calls can be made.



■ Switch on or off

To switch your phone on or off, press and hold the power key on top of the phone for at least 3 seconds.




■ Connect the headset

A compatible headset may be included with your phone or purchased separately as an enhancement. See "Enhancements," p. 83.

1. Plug the headset connector into the Pop-Port™ connector at the bottom end of your phone.
2. Position the headset on your ear.

With the headset connected, you can make, answer, and end calls as usual.

- Use the keypad to enter numbers.
- Press **Call** to place a call.
- Press **End** to end a call.



■ Change Xpress-on™ covers


Before removing the cover, always switch off the power and disconnect the charger and any other phone. Avoid touching electronic components while changing the covers. Always store and use the phone with the covers attached.

Remove the back cover and the battery

For instructions on removing the back cover and the battery, see "Remove the back cover," p. 18 and "Remove the battery," p. 18.



Remove the front cover

Gently pull the bottom of the front cover away from the rest of the phone, and remove the front cover.



Install the key mat and front cover

1. Remove the key mat from the old front cover.
2. Place the key mat into the new front cover.



Set up your phone

3. Press the front cover and key mat against the phone, and snap the front cover into place.

Replace the battery and back cover

See "Replace the battery," p. 18 and "Replace the back cover," p. 18.

■ Make a call

Use the keypad

1. Enter the phone number (including the area code), and press **Call**.
(To delete a character to the left of the cursor, select *Clear*.)
2. Press **End** to end the call or to cancel the call attempt.


Use the contacts list

To enter a number into the contacts list, at the main screen, select *Contacts* > *Add new*, and enter the name and phone number. See "Save an entry," p. 47.

1. At the main screen, scroll down to display the contents of your contacts list.
2. Select a contact from the list.
3. Press **Call** to make the call, or select *Details* to view details of the entry.

Use the last dialed number

1. At the main screen, press **Call** to display the last 20 numbers dialed.
2. Scroll to the number (or name) you wish to redial, and press **Call**.



■ Answer calls

Answer or silence/decline

1. Press **Call**, or select *Answer* to answer the call.
2. To mute the ringing tone, select *Silence*. If you do not answer the call, the call is eventually forwarded to voicemail.
3. To decline and forward the call to voicemail, select *Decline* after you have muted the ringing tone, or press **End** at any time.

Answer a call with locked keypad

To answer a call with the keypad locked, press **Call**. During the call, all features function as normal. When you end or decline the call, the keypad automatically relocks. See "Keyguard," p. 24.

When the phone is locked, calls may be possible to the official emergency number programmed into your phone.

Adjust the volume during a call

To increase or decrease the volume during a call, scroll up or down during the call. When adjusting the volume, a bar chart indicates the volume level.

Speakerphone

You can use the speakerphone, or loudspeaker, on your phone during a call.



Warning: Do not hold the phone near your ear when the speakerphone is in use because the volume may be extremely loud.

- To activate the speakerphone while in a call, select *Loudsp.*

Set up your phone

- To deactivate the speakerphone during a call, select [Handset](#).

The speakerphone is deactivated automatically when a call (or a call attempt) ends or when certain enhancements are connected.

Options during a call

Many of the options that you can use during a call, are network services. Check with Virgin Mobile for more information.

Select [Options](#) during a call to display a list of options available during a call, then select an option.

■ [Keyguard](#)

With keyguard, you can lock the keypad to prevent keys from being pressed accidentally and prevent accidental calls. If the keypad is locked, it unlocks when you receive a call. After the call, the lock automatically reactivates.

When keyguard is on, it is still possible to dial the official emergency number programmed into your phone.

To lock the keypad, select [Menu](#) and press * within 2 seconds.

To unlock the keypad, select [Unlock](#) and press * within 2 seconds.

■ [Flashlight](#)

Your phone has a built-in flashlight that you can activate when the phone is in idle mode or when there is a call in progress. Press and hold * to switch on the flashlight. Press and hold * again to switch off the flashlight.

You can also use the flashlight to alert you to an incoming call. For more information, see "Personalize a profile," p. 56.



3. Text entry

You can use two methods for entering text and numbers:

- Standard mode is the only way to enter text into the contacts list, and to rename caller groups.
- Predictive text is a quick and easy method for writing messages and creating a calendar note.

■ Standard mode

Text (Abc)

- Press a key once to insert the first letter on the key, twice for the second letter, etc. If you pause briefly, the last letter in the display is accepted and your phone awaits the next entry.
- Press 0 to enter a space and accept a completed word.
- Press 1 to enter a period (.).
- Press * to display special characters. See more about special characters on the following pages.
- Press # to change the text input mode. The following icons (not the descriptions) appear in the upper left of the display screen:



Uppercase text: standard mode is on.



Lowercase text: standard mode is on.



Sentence case text: standard mode is on.

Numbers (123)

To switch to 123 mode from Abc mode, press and hold # at any message entry screen until the icon in the upper left corner of the display switches from Abc to 123 (or vice versa).

- Select *Clear* to backspace the cursor and delete a character.
- Select and hold *Clear* to backspace continuously and delete characters.

Punctuation and special characters

While at any text entry screen, press * to display special characters (press and hold * if predictive text is on). To navigate through the list of special characters, use the scroll key. Once a character is highlighted, select *Insert* to insert the character into your message.

Predictive text input

Predictive text input allows you to write messages quickly using your keypad and the built-in dictionary. It is much faster than the standard mode method, because the phone guesses the words as you type them.

Activate or deactivate

At any text entry screen, select *Options* > *Predictive text*.

Text entry


This example describes text entry using predictive text. To write the word "Nokia" with predictive text on, press each of the following displayed number keys once. This illustration shows the text displayed on your screen as you press 6-6-5-4-2. Predictive text estimates which of the three or four letters corresponds to the number on the keypad you pressed, as shown:


Enter: 6 6 5 4 2



When using predictive text:

- Press 0 to enter a space between words.
- If a displayed word is not correct, press * to display another match. To return to the previous word in the list of matches, select [Previous](#).
- If ? appears after a word, select [Spell](#) to add the word to the dictionary.
- Press 1 to insert a period into your message.
- Press and hold * to display special characters. Press * again to cycle through all available characters.
- Press # to switch predictive text on or off and to use predictive text in various modes. As you press #, the following icons (not the descriptions) appear in the upper left of the display screen:

 **Abc** Sentence case text: predictive text is on.

 **abc** Lowercase text: predictive text is on.

4. My Account



You can access your Virgin Mobile account to check or add money to your balance.

■ Check account balance

To retrieve your account balance, select [Menu](#) > [My Account](#) > [Check balance](#). The current balance will be sent to your phone as a Virgin Alert. See "Virgin Alerts," p. 38.



Note: When your account has no balance, calls may only be possible to the official emergency number programmed into the phone.

■ Top-Up your account

Top-Up is how you add money to your Virgin Mobile account. You can Top-Up from your phone by using a Top-Up card that you have bought at the store or a credit/debit card that you have registered with Virgin Mobile. Here's how:

1. Select [Menu](#) > [My Account](#) > [Top-Up](#).
2. Select either a Top-Up card or a debit/credit card and follow the prompts.

For more information about Top-Up and your Virgin Mobile account, please visit www.virginmobileusa.com.

5. Messaging



Your Virgin Mobile service allows you to send and receive text messages with other mobile phones and email addresses. For pricing and additional information, please contact Virgin Mobile.



Note: When sending messages, your phone may display Message sent. This is an indication that the message has been sent by your phone to the message center number programmed into your phone. This is not an indication that the message has been received at the intended destination. For details about your messaging service, check with Virgin Mobile.

■ Text messages

At the main screen, select *Menu* > *Messaging* > *Text messages* and select from the following:

Create message—Allows you to create and send messages.

Inbox—Allows you to check for received messages.

Virgin Alerts—Allows you to check received Virgin Alert messages.

Sent items—Allows you to check for sent messages.

Archive—Allows you to save received messages.

Templates—Includes a selection of templates for creating messages.

My folders—Allows you to create and name personal folders for storing messages.

Distribution lists—Allows you to define a group of up to 10 recipients to which messages can be addressed.

Delete messages—Allows you to delete messages from a selected folder or all folders.

Message settings—Includes options for changing settings for reading, writing and sending messages.

Write and send

1. At the main screen, select *Menu* > *Messaging* > *Text messages* > *Create message*.
2. Select *Add number* to add the recipient's phone number or *Add e-mail* to add the e-mail address. To retrieve a number or e-mail address from your contacts list while using these options, select *Search* and *OK*. Select *Add list* to add a distribution list, if a distribution list is available. See "Create a distribution list," p. 31.
3. Select *Options* and repeat step 2 to add more recipients, then select *OK*.
4. Select *Options* > *Enter text*.

You can use templates to compose your message. A template is a short, prewritten message that you can insert into your text message to save time when typing. To insert a template into your message, select *Options* > *Use template* and select a template.

5. Compose a message using the keypad and select *Options* > *Send*.

Options when creating a message

When you send a text message, some or all of the following options are available, depending on your text input mode:

Send—Send the message to the selected recipients.

List recipients—Display the list of recipients for your message.

Settings—Allows you to set any of these three settings on and off: *Urgent*, *Delivery note*, *Callback number*.

Save message—Select a folder you created to save the message to a personal folder; select *Sent items* to save the message in the sent items folder; select *Templates* to save the message as one of your predefined templates; or select *Archive* to save the message in your archive.

Clear text—Erase all text from the message editor.

Exit editor—Enables you to save the message to your sent items folder or discard the message as you leave the message editor.

Insert contact—Insert a name from your contacts list into your message.

Insert number—Insert a phone number or find a phone number in the contacts list.

Use template—Insert a predefined template into your message.

Insert smiley—Insert the smiley face of your choice into your message.

Insert word or *Edit word*—Enter or edit the text of a new word that might not appear in the predictive text dictionary. This displays only when *Predictive text* is set to On.

Insert symbol—Insert a special character into your message. This displays only when *Predictive text* is set to On.

Predictive text—Choose a predictive text language to turn predictive text on, or select *Prediction off* to turn it off.

Matches—View matching words found in the dictionary for the word you want to use. This displays only when *Predictive text* is set to On and when the same set of key strokes can produce multiple words.

Create a distribution list

1. At the main screen, select *Menu* > *Messaging* > *Text messages* > *Distribution lists* > *Options* > *Add list*.
2. Enter a name for the list, and select *OK*.
3. To add contacts to this list, select *Options* > *Add contact*.
4. Add the contacts one by one to this list.



Send a message to a distribution list

1. At the main screen, select *Menu > Messaging > Text messages > Create message*.
2. Select *Add list*, scroll to a distribution list, and select *OK*.
3. Select *Options > Enter text*.
4. Compose a message using the keypad, and select *Options > Send*.
5. Select *Options > Send*.

Your message is then sent to each of the recipients in the list.

You may incur separate charges for sending a single message to multiple recipients. For pricing, check with Virgin Mobile.

Read a message

When you receive a message, a notification message displays and  is displayed. When you have unopened messages in your inbox,  is shown in the upper left corner of the main screen as a reminder.

1. Select *Show* to read the message, or *Exit* to decline notification.
2. Scroll up or down to view the whole message if necessary.

Options while reading a message

When you read a text message, the following options are available:

Delete—Discard the message.

Reply—Reply to the message. Create the message, and select *Options > Send*.

The sender's phone number or e-mail is used as the default

Use number—Select *Save*, *Add to contact*, *Send message*, or *Call*.

Save—Save the message to a folder.

Save address—Saves an e-mail address to a contact. This option appears if the message contains an e-mail address.

Forward—Forward the message to another phone number.

Rename—Edit the title of the message.

Reply to a message

When you receive a message, a notification message and  is displayed.

1. Select *Show > Options > Reply*.
2. Select a *Start reply with* option and compose your reply using the keypad. These options include:

Empty screen—Compose reply starting with an empty screen.

Original text—Compose reply starting with the text that is in the message you received.

Template—Compose your reply starting with a template from the template list.

Precomposed short replies: *Yes, No, OK, Thank you, Congrats, Happy birthday, I love you too, Hugs and kisses, Sorry, and Sorry, I'm late.*

3. Select *Options > Send*.

To reply to a previously received message:

1. At the main screen, select *Menu > Messaging > Text messages > Inbox* and select a message.
2. Select *Options > Reply* to respond.

Change message sending options

1. At the main screen, select *Menu > Messaging > Text messages > Message settings > Sending options*.
2. Select the setting you wish to change:

Priority—Select the priority of the note as *Normal* or *Urgent*.

Delivery note—A note is sent to you confirming delivery of the message.

Select *On* or *Off*.

Send callback number—A callback number is sent to the recipient. Select *Off* or default phone number.

Change other message settings

1. At the main screen, select *Menu* > *Messaging* > *Text messages* > *Message settings* > *Other settings*.

2. Select the setting you wish to change:

Message font size—Select *Small font* or *Large font* to change the font size.

Message overwriting—Select the folders in which new messages overwrite old messages: *Sent items only*, *Inbox only*, or *S. items & Inbox*. Select *Off* to save all messages without overwriting them.

Save to Sent items as sending—Select how you want to save messages to the sent items folder: *Always save*, *Always prompt*, or *Off*.

When the message memory is full, your phone cannot send or receive any new messages. However, you can use *Message overwriting* to overwrite old messages in the *Inbox* and *Sent items* folders with any new messages.

Message folders

Save messages to folders

You can save drafts of messages, or save received messages to a folder that you have created, or to any existing folder.

To save a draft of a message you are creating, or to save a received message to a folder, select *Options* > *Save message* and a folder you have created, *Sent items*, *Templates*, or *Archive*.

View saved messages

1. At the main screen, select [Menu](#) > [Messaging](#) > [Text messages](#).
2. Select the folder containing the message you wish to view.
3. When the folder opens, select the message you wish to view.

Inbox folder

Unopened messages are automatically stored in the inbox. Select [Menu](#) > [Messaging](#) > [Text messages](#) > [Inbox](#) and the message you want to read. You can select [Back](#) to return to the inbox, or select [Options](#) to respond to the message. See "Options while reading a message," p. 32.

Sent items folder

Messages that you have sent and messages that you have created but have not sent are stored in the sent items folder by default.

When sending messages, set [Save to Sent items as sending](#) to [Always save](#) or [Always prompt](#) to ensure that your messages are saved. If [Save to Sent items as sending](#) is set to [Off](#), sent messages are not stored in the sent items folder. To change the settings, select [Menu](#) > [Messaging](#) > [Text messages](#) > [Message settings](#) > [Other settings](#) > [Save to Sent items as sending](#).

Archive folder

Store messages that have been read in the [Archive](#) folder.

Templates folder

Prewritten templates are stored in the [Templates](#) folder. Preloaded templates can be edited and customized.

My folders

To keep your messages organized, create custom folders and save some of your messages there.

Add a folder

1. At the main screen, select *Menu* > *Messaging* > *Text messages* > *My folders* > *Options* > *Add folder*.
2. Enter a name for the new folder, and select *OK*.

Rename a folder


1. At the main screen, select *Menu* > *Messaging* > *Text messages* > *My folders*. Any folders that you have created appear in the display.
2. Scroll to the folder you wish to rename, and select *Options* > *Rename folder*.
3. Select and hold *Clear* to delete the existing entry.
4. Enter the new name for the folder, and select *OK* to confirm or *Back* to exit.

Delete a folder

Only folders created in *My folders* can be deleted. The *Inbox*, *Sent items*, *Archive*, and *Templates* folders are protected. When you delete a folder, all messages in the folder are also deleted.

1. At the main screen, select *Menu* > *Messaging* > *Text messages* > *My folders*.
2. Scroll to the folder you wish to remove, and select *Options* > *Delete folder*.
3. Select *OK* to delete or *Back* to exit.

■ Delete messages

If your message memory is full and you have more messages waiting at the network,  blinks on the main screen. You can do the following:

- Read some of the unread messages, and delete them.
- Delete messages from some of your folders.

A single message

To delete a single message, you need to open it first.

1. At the main screen, select *Menu* > *Messaging* > *Text messages*.
2. Select the folder containing the message you wish to delete.
3. Select the message you wish to delete.
4. Select *Options* > *Delete* > *OK* to delete the message or *Back* to exit.

All messages in a folder

1. At the main screen, select *Menu* > *Messaging* > *Text messages* > *Delete messages*.
2. Select the folder containing the messages you wish to delete.

All—Deletes all messages in all of the folders.

All read—Deletes any messages that have been read in all of the folders.

All unread—Deletes any messages that have not been read in all of the folders.

Inbox—Deletes all messages from the *Inbox* folder.

Sent items—Deletes all messages from the *Sent items* folder.

Archive—Deletes all messages from the *Archive* folder.

User defined folders—All user defined folders that the user has added under *My folders* are displayed at the end of the predefined folders.

3. Select *OK* to empty the folder.

■ Virgin Alerts

From time to time, Virgin Mobile may send you Virgin Alerts. These messages contain important information about your Virgin Mobile service or account.

Receiving Virgin Alerts

When you receive a Virgin Alert, your phone will light and play a tone. Then, select one of the following:

Call—Responds using a voice call back number.

Top-Up—Alerts you that it's time to Top-Up in order to keep using your Virgin Mobile service.

Press *Exit* to leave the alert screen.

To view a received alert, select *Menu* > *Messaging* > *Text messages* > *Virgin Alerts*, and the alert you want to view. The most recent alerts are listed first.

To increase your account balance from a Balance Virgin Alert, select *Menu* > *Messaging* > *Text messages* > *Virgin Alerts*. Select a balance alert and then select *Top-Up*.

Your phone will store the last 25 alerts received.

■ Voice messages

When you receive a voice message, your phone displays a notification and may beep or vibrate. If you receive more than one message, your phone shows the number of messages received.

Call and set up your voicemail

1. Press and hold 1.
2. When you connect to voicemail and the prerecorded greeting begins, follow the automated instructions to set up your voicemail.



Note: You may incur airtime charges for calls into your voicemail. Check with Virgin Mobile for pricing.

Listen to your voice messages

Use one of the following ways to listen to voice messages:

- Press and hold 1.
- Select [Listen](#) if there is a notification message in the display.
- At the main screen, select [Menu](#) > [Messaging](#) > [Voice messages](#) > [Listen to voice messages](#).

When you connect and the prerecorded greeting begins, follow the automated instructions to listen to your voice messages.

Automate voicemail

To automatically access your voicemail messages, you can insert special characters called dialing codes into phone numbers and save the number to a speed dial location. Dialing codes instruct the receiving system to pause, wait, bypass, or accept the numbers that follow them in the dialing string.

Voicemail services vary by service provider. The following instructions are examples of common operations. Please check with Virgin Mobile for specific instructions for using your voicemail service.

Voicemail box number and process

1. Write down your voicemail box number.
2. Call and check your voicemail as you normally would.
3. Write down your step-by-step interaction with the recorded prompts. Remember that each voicemail service varies. Your steps may resemble the following:
Dial 2145551212, pause 5 seconds, press 1, pause 2 seconds, press 1234 and *.
Be precise; you need this information to set up your voicemail with dialing codes.

Dialing codes

Press * repeatedly to cycle through dialing codes. When the desired code appears in the display, pause briefly and the code is inserted into the dialing string.

The following dialing codes are available:

Dialing code	Indicates...
*	Bypasses a set of instructions.
+	Causes the International access code to be replaced by +.
p	Pauses for 2.5 seconds before sending any numbers that follow.
w	Waits for you to press Call before sending the numbers or codes that follow.

Speed dial voicemail with dialing codes

1. At the main screen, select [Contacts](#) > [Speed dials](#).
2. Scroll to an empty speed dial slot, and select [Assign](#).
3. Enter your voicemail box number, including the area code.
4. Refer to "Dialing codes" and enter codes as necessary using the information that you saved from "Voicemail box number and process," p. 39.
For example, if you pause for 5 seconds after connecting to voicemail, enter the dialing code p twice after the voicemail box number (for example, 2145551212pp).
5. Enter any remaining numbers, dialing codes, or other information that allows you to listen to your messages and select [OK](#).
6. Enter a name for the number (such as voicemail), and select [OK](#).

To dial and listen to your voicemail, press and hold the assigned speed dial key at the main screen.

6. VirginXtras

VirginXtras are a fun collection of features that you can access directly from your phone — games, music, and more.

Visit www.virginmobileusa.com for pricing and more information about VirginXtras.

■ Access VirginXtras

At the main screen, select *Menu* > *VirginXtras*, or press and hold 0.

Your phone cannot receive incoming calls while you are using VirginXtras. Incoming calls are automatically forwarded to voicemail.

■ Navigate VirginXtras

Phone keys

- To browse the menus, scroll up or down.
- To go back, press **End**.
- To select a link or perform an action on a page, press the selection key that corresponds to that action.
- To change the text input mode, press **#** until the desired mode is displayed.
- To enter letters and numbers, press a key from **0–9**. Press a key once to insert the first letter on the key, twice for the second letter, etc.
- To enter special characters, press ***** in text mode.

Download ringing tone

1. At the main screen, select **Menu** > *VirginXtras* and select a ringing tone. The download operation takes a few moments. When the ringing tone is downloaded, *Ringtone received* is displayed.
2. Select *Options* and one of the following:
 - Playback*—Allows you to hear the ringing tone before you save or discard it.
 - Save ringtone*—Allows you to save your ringing tone to the list in your profiles. If the list of ringing tones is full, you can either select *No replacing* and discard the downloaded ringing tone, or select one of the ringing tones on your phone to replace with the downloaded ringing tone.
 - Discard*—Allows you to discard the ringing tone without saving it.
3. The next screen will show that the download was successful. Press **Next** to close the browser and enter the *Profiles* menu.
4. Select one of the profiles: *Normal*, *Silent*, *Meeting*, *Outdoor*, or *Pager*.
5. Select *Customize* > *Ringtone* and select your downloaded ringing tone from the list.
6. Press **End** to exit from this menu.

Make an emergency call while using VirginXtras

You must exit VirginXtras before you can make an emergency call.

1. To exit VirginXtras, press and hold **End**.
2. Enter the emergency number for your present location (for example, 911). Emergency numbers vary by location.
3. Press **Call**.

Exit VirginXtras

To exit VXL, press and hold **End**.

7. Recent calls



Recent calls stores information about the last 20 missed, 20 received, or 20 dialed calls. It also adds the total duration of all calls. When the number of calls exceeds the maximum, the most recent call replaces the oldest.

Whether viewing missed, incoming, or outgoing calls, the menu options are the same:

Call time—Display the date and time of the call.

Send message—Send a message to the number.

View number—Display the number.

Use number—Make a call using the number.

Save—Enter a name for the number and save it to your contacts list.

Add to contact—Add the number to an existing entry in your contacts list, if the number is not associated with a name.

Delete—Clear the number from memory.

Call—Call the number.

■ View missed calls

Missed calls are calls that were either declined or never answered. The missed calls feature does not function when your phone is switched off.

1. If a missed call notification appears in the display, select *List*; otherwise, from the main screen, select *Menu* > *Recent Calls* > *Missed calls*.
2. When the phone number appears in the display, select *Options*.
3. Select an option.

■ View incoming calls

Incoming calls are calls that have been answered.

1. At the main screen, select *Menu* > *Recent Calls* > *Incoming calls*.
2. Select a name or number and *Options*.
3. Select an option.

■ Outgoing calls

Outgoing calls are previous numbers you have dialed from your phone:

1. At the main screen, press **Call**, or select *Menu* > *Recent calls* > *Outgoing calls*.
2. Select a name or number and *Options*.
3. Select an option.

Call times

You can make or receive calls to or from the same number and view the time each call occurred. Your clock must be set for this feature to work accurately.

1. While viewing a missed, incoming, or outgoing call, select *Options* > *Call time*.
2. Scroll down to view the most recent call times from this number.
3. Select *Back* to return to the options list.

■ Delete recent calls

You can delete any missed, incoming, or outgoing calls from phone memory.

1. At the main screen, select *Menu* > *Recent calls* > *Delete recent call lists*.
2. Select the call type you would like to clear: *All*, *Missed*, *Incoming*, or *Outgoing*.

8. Contacts

The contacts list can hold up to 250 contacts, with multiple numbers and text notes for each contact. The amount of numbers and text entries that you can save may vary, depending on length and the total number of entries in the contacts list.

■ Contacts options

You can access contacts options in one of two ways:

- At the main screen, select *Contacts*.
- At the main screen, select *Menu* > *Contacts*.

In this chapter, to access contacts options, select *Contacts*.

■ Search

1. At the main screen, select *Contacts* > *Search*.
2. Type in the first character of the contact name and highlight the contact you wish to view.
3. Select *Details* > *Options* and the action you want to apply to the contact.

■ Add new contacts

Save a name and number

1. At the main screen, enter the phone number you wish to save.
2. Select *Options* > *Save*.
3. Enter the name, and select *OK*.

Save (only) a number

1. At the main screen, enter the phone number you wish to save.
2. Press and hold *Options*.

Save an entry

1. At the main screen, select *Contacts* > *Add new*.
2. Enter the name, and select *OK*.
3. Enter the phone number, and select *OK* > *Done*.

Save numbers and details

You can save different types of phone numbers and short text items per name to the contacts list. The first number you save for any entry is automatically set as the default, but the default number can always be changed. You can save details such as addresses and notes as contact information.

1. At the main screen, scroll down to display a list of entries in your contacts list.
2. Scroll to the entry to which you wish to add a phone number or text item.
3. Select *Details* > *Options* > *Add number* or *Add detail*.
4. Select *General*, *Mobile*, *Home*, *Work*, or *Fax* type when adding a number; or select *E-mail*, *Web address*, *Street addr.*, or *Note* when adding details.
5. Enter the number or text for the type you have selected, and select *OK*.
6. To change the type, select *Change type* in the options list.

Change the default number

To change the default number for the contact entry:

1. At the main screen, scroll down to the entry you wish to change, and select *Details*.
2. Scroll to the number you wish to set as default, and select *Options* > *As primary no.*

■ Edit contact name

1. At the main screen, select *Contacts* > *Edit name*.
2. Scroll to the entry you wish to change and select *Edit*.
3. Enter your changes; then select *OK*.

■ Delete contacts list entries

1. At the main screen, select *Contacts* > *Delete*.
2. To delete individual entries, select *One by one*.
3. Scroll to the entry you wish to delete, and select *Delete* > *OK* to confirm.
4. To delete the entire contents of your contacts list, select *Delete all* > *OK*.

■ Add number list entries

Add number allows you to add another number to an existing contact.

1. At the main screen, select *Contacts* > *Add number*.
2. Highlight a contact from the list and select *Add*.
3. Select the tag *General*, *Mobile*, *Home*, *Work*, or *Fax* and enter the number.

■ Settings

Settings allows you to determine how your phone numbers will be viewed and how much memory remains in the contacts list.

At the main screen, select *Contacts* > *Settings* and one of the following:

Scrolling view—Specify how names and numbers are viewed in Contacts list.

Memory status—View the amount of space available in Contacts list.

■ Speed dialing

You can associate any entry in the contacts list with a key from **2–9**. To dial those entries, press and hold the assigned key. Speed dialing must be turned on to use this method.

Press the assigned key and **Call** to speed dial at any time.

Assign a key to speed dial

1. At the main screen, select *Contacts* > *Speed dials*.
2. Select any empty slot and *Assign*.
3. Enter the number (including the area code), and select *OK*; or select *Search* to retrieve a number from the contacts list.
4. Enter the contact name for the number, and select *OK*.
If speed dial is off, the phone displays a prompt asking if you would like to turn speed dial on.
5. Select *Yes* to activate speed dial.

Change speed dial numbers

1. At the main screen, select *Contacts* > *Speed dials*.
2. Select the speed dial entry you wish to change and *Options* > *Change*.
3. Enter the new number and select *OK*; or select *Search* to view the contacts list and select a new number.
4. Enter a name for the entry, and select *OK*.

Delete speed dial numbers

1. At the main screen, select *Contacts* > *Speed dials*.
2. Select the speed dial location you wish to delete.
3. Select *Options* > *Delete* > *OK* to delete the key assignment.

Voice tags

Voice tags allow you to dial a contact by speaking. You can also playback, change, or delete voice tags.

Voice dialing

You can dial up to 25 stored numbers using voice dialing.

Before using voice tags, note the following:

- Voice tags are not language dependent. They are dependent on your voice.
- You must say the name exactly as you said it when you recorded it.
- Voice tags are sensitive to background noise. Record voice tags and use them in a quiet environment.
- Very short names are not accepted. Use long names, and avoid similar names for different numbers.

Using voice tags may be difficult in a noisy environment or during an emergency, so you should not rely solely upon voice dialing in all circumstances.

Add a voice tag to a contact

Before you can use voice dialing, you must first assign a voice tag to the number.

1. At the main screen, use scroll down to enter the contacts list.
2. Highlight the contact you want to add a voice tag, and select *Details* > *Options* > *Add voice tag*.
3. Select *Start*; then speak clearly into the phone.

Do not select *Quit* unless you want to cancel the recording.

The phone automatically stops recording, saves, and replays the voice tag.



appears next to the phone numbers that have voice tags assigned.

Dial a number

1. At the main screen, select and hold *Contacts*.
2. When you hear several beeps and *Speak now* appears, release the key.
3. Say the voice tag clearly into the phone.

When the phone finds the voice tag, *Found* appears, and the phone automatically dials the number. If the phone does not locate a number or recognize the voice tag, *No match found* appears.

Voice tag options

After you have added a voice tag to a contact, you can choose one of the following options:

Playback

1. At the main screen, select *Menu > Contacts > Voice tags*.
2. Scroll to the name with the voice tag you want to hear.
3. Select *Options > Playback*.

Modify

1. At the main screen, select *Menu > Contacts > Voice tags*.
2. Scroll to the name with the voice tag you want to change.
3. Select *Options > Change*.
4. Select *Start*, then speak clearly into the phone. The phone repeats your voice tag, and Voice tag changed appears.

Delete

1. At the main screen, select *Menu > Contacts > Voice tags*.
2. Scroll to the name with the voice tag you want to erase.
3. Select *Options > Delete*.
4. Select *OK* to erase the voice tag.

■ My phone no.

My phone no. allows you to display your own phone number. Select *Contacts > My phone no.*

■ Caller groups

Caller groups allows you to organize your contact information into groups. You can add contacts list entries to any of five caller groups, and assign a unique ringing tone or graphic to that group. This enables you to identify callers from the group by their unique ringing tone or graphic.

Set up a group

1. At the main screen, scroll down to display a list of entries in your contacts list.
2. Select a name you would like to add to a caller group.
3. Select *Details > Options > Caller groups*.
4. Select the caller group to which you would like to add the name.

Caller group options

1. At the main screen, select *Contacts > Caller groups > Family, VIP, Friends, Business, or Other*.

2. Select one of the following caller group options and follow the directions displayed:
Rename group—Rename the group to your preference.
Group ringtone—Set the ringing tone for the group.
Group logo—Turn the graphic for the caller group on or off.
3. *Group members*—Add or remove members from the caller group.

■ Edit contacts list entries

1. At the main screen, scroll down to display the contents of your contacts list.
2. Select the entry you would like to edit and *Details*.

Edit phone number

1. Highlight the phone number you would like to edit, and select *Options*.
2. Select one of the following options:
Add voice tag—Add a voice tag to the contact.
Edit number—Edit an existing phone number of the contact.
Delete number—Delete a phone number from the contact.
Use number—Display the phone number on the main screen, ready to be called.
View—View the details of the contact.
Change type—Change the number type to *General*, *Mobile*, *Home*, *Work*, or *Fax*.
As primary no.—Change the default number of the contact.
Add number—Add a number to the contact.
Add detail—Add an address or note to the contact.
Caller groups—Add the contact to an existing caller group.
Custom tone—Add a custom ringing tone to the contact.

Contacts

Send bus. card—Send the contact as a business card to another phone.

Send message—Create and send a message to the contact.

Speed dial—Add the contact to your speed dial list.

Edit name—Edit the name of the contact.

View name—View the name of the contact.

Delete—Delete the entire contact entry from your contacts list.

E-mail address entry

1. Highlight the e-mail address entry you would like to send or update, and select *Options*.
2. Select one of the following options:

Send e-mail—Send an e-mail.

Edit detail—Edit existing details of e-mail.

Delete detail—Delete existing e-mail.

View—View the details of the e-mail contact.

Change type—Change the e-mail type to *E-mail*, *Web address*, *Street addr.*, or *Note*.

Add detail—Add an address or note to the entry.

Add number—Add a number to the entry.

Caller groups—Add the e-mail to an existing caller group.

Custom tone—Add a custom ringing tone to the contact.

Send bus. card—Send the contact a business card.

Edit name—Edit the name of the contact.

View name—View the name of the contact.

Delete—Delete the entire e-mail entry from your contacts list.

Edit other text items

1. Highlight the address entry you would like to edit, and select *Options*.
2. Select the option you wish to perform and *OK*.

■ Send and receive contacts (business cards)

You can send and receive an entry in your contacts list using a text message.

Send a business card

You can send a business card as a text message to a compatible phone.



Note: Multiple text messaging charges may apply. Check with Virgin Mobile for details.

1. At the main screen, scroll down to display the contents of your contacts list.
2. Highlight an entry from the contacts list that you wish to send, and select *Details > Options > Send bus. card*.
3. To send the business card as a message, select *Via text msg*. If the contact entry has more than one item saved, select *Primary no.* or *All details*.
4. Enter the number for your recipient, or select *Search* to retrieve a number from your contacts list.
5. Select *OK*. The business card is sent.

9. Settings



Use this menu to set or change profiles, tone settings, call settings, phone settings, phone details, time and date settings, voice navigation, enhancement settings, security settings, or to restore the factory settings.

■ Profiles

Profiles define how your phone reacts when you receive a call or message, how your keypad sounds when you press a key, and more. Ringing options, keypad tones, and other settings for each of the available profiles can be customized or left at their default setting. The following profiles are available: Normal, Silent, Meeting, Outdoor, and Pager.

Profiles are also available for enhancements such as a headset and car kit. See "Enhancement settings," p. 67.

Activate

1. At the main screen, select [Menu](#) > [Settings](#) > [Profiles](#).
2. Select the profile of your choice.
3. Select [Activate](#).

Personalize a profile

You can personalize any of the profiles a variety of ways.

1. At the main screen, select [Menu](#) > [Settings](#) > [Profiles](#).
2. Select the profile you wish to customize.
3. Select [Customize](#).

4. Select the option you want to customize: *Incoming call alert*, *Ringtone*, *Ringtone volume*, *Vibrating alert*, *Light alert*, *Message alert tone*, *Keypad tones*, *Warning tones*, *Alert for*, or *Profile name*.

You cannot rename the Normal profile.

Select *Alert for* to set the phone to ring only upon calls from phone numbers that belong to a selected caller group. Scroll to the caller group you want or *All calls*, and select *Mark* or *Unmark* > *Done*. To set the phone to ring for every call, select *All calls* > *Mark* > *Done*.

Changing your ringing tone

You can select from many ringing tones, including your downloaded ringing tones, that appear in the list in your profiles.

1. From the main screen, select *Menu* > *Settings* > *Profiles* > *Normal*, *Silent*, *Meeting*, *Outdoor*, or *Pager*.
2. Select *Customize* > *Ringtone* and select a ringing tone from the list.

Set a timed profile

Timed profiles can be used to prevent missed calls. For example, you attend an event that requires your phone be set to Silent before the event starts, but you forget to return it to Normal until long after the event. A timed profile can prevent missed calls by returning your phone to the default profile at a time you specify.

Timed profiles can be set up to 24 hours in advance.

1. At the main screen, select *Menu* > *Settings* > *Profiles*.
2. Select the profile you wish to activate.
3. Select *Timed*.
4. Enter the time for the profile to expire, and select *OK*.

■ Tone settings

From this menu, you can adjust the ringing tone volume, keypad tones, and other tone settings for the currently active profile. You can also set the phone to ring for calls from phone numbers that belong to a selected caller group. See "Personalize a profile," p. 56.


■ Call settings


Location info sharing

Location info sharing is a network service. See "Network Services," p. 8.

Location info sharing allows the phone to share position information over the network. For calls to emergency numbers, this position information may be used by the emergency operator to determine the position of the phone. The functionality and accuracy of this feature is dependent on the network, satellite systems, and the agency receiving the information. It may not function in all areas or at all times.

At the main screen, select *Menu* > *Settings* > *Call settings* > *Location info sharing* > *Emergency* or *On* > *OK* > *OK*.

Emergency—This is the default profile. The phone location information is shared only during an emergency call to the official emergency number programmed into your phone. The phone screen displays  in the main screen.

On—The phone location information is shared with the network whenever the phone is powered on and activated. The screen displays  in the main screen.

Location information is always shared with the network during emergency calls to the official emergency number programmed into the phone, regardless of the setting you select. After placing an emergency call, the phone remains in emergency mode for five minutes. During this time, the location information is shared with the network. See "Emergency calls," p. 95.

Anykey answer

Anykey answer allows you to answer an incoming call by briefly pressing any key except the **Power** key, **Right selection** key, or **End** key.

At the main screen, select *Menu* > *Settings* > *Call settings* > *Anykey answer* > *On* or *Off*.

Automatic redial

With automatic redial activated, your phone redials the number until the call is successful, or is terminated.

At the main screen, select *Menu* > *Settings* > *Call settings* > *Automatic redial* > *On* or *Off*.

Speed dialing

You can activate or deactivate speed dialing. At the main screen, select *Menu* > *Settings* > *Call settings* > *Speed dialing* > *On* or *Off*. See "Speed dialing," p. 49.

Calling cards

If you use a calling card for long distance calls, save the calling card number in your phone. The phone can store up to four calling cards. Contact your calling card company for more information.

Save information

1. In the standby mode, select *Menu* > *Settings* > *Call settings* > *Calling card*.
2. Enter your security code, and select *OK*. See "Security settings," p. 67.
3. Scroll to the calling card of your choice, select *Options* > *Select* > *OK*.
4. Select one of the following sequence types:

Settings

Access no. + phone no. + card no.—Dial the 1-800 access number, phone number, then enter the card number (plus PIN if required).

Access no. + card no. + phone no.—Dial the 1-800 access number, card number (plus PIN if required), then enter the phone number.

Prefix + phone no. + card no.—Dial the prefix (numbers that must precede the phone number) and phone number, then enter the card number (plus PIN if required).

5. Enter the required information (access number or prefix and card number), and select *OK* to confirm your entries.
6. Select *Card name* > enter the card name > *OK*.

Select a calling card

You can select one of the calling cards for which you have saved information. The selected card information is used when you make a card call.

1. In the standby mode, select *Menu* > *Settings* > *Call settings* > *Calling card*.
2. Enter your security code, and select *OK*. See ""Security settings,"" p. 67.
3. Scroll to the calling card of your choice, and select *Options* > *Select* > *OK*.

Make card calls

After you have selected a calling card, make a card call.

1. Enter the phone number, including any prefix (such as 0 or 1) that your calling card may require when you make a calling card call. See your calling card for instructions.
2. Press and hold the send key key for a few seconds until *Card call* is displayed.
3. Follow the instructions on the screen.

4. When you hear the tone or system message, select *OK*.

Call Summary

Your phone can display the time spent on a call when you hang up.

At the main screen, select *Menu* > *Settings* > *Call settings* > *Call summary* > *On* or *Off*.

■ Phone settings

Phone language

1. At the main screen, select *Menu* > *Settings* > *Phone settings* > *Phone language*.
2. Select the language of your choice.

The language setting may affect the time and date formats of the clock, alarm clock, and calendar.

Automatic keyguard

You can set the keypad of your phone to lock automatically after a preset time delay.

1. At the main screen, select *Menu* > *Settings* > *Phone settings* > *Automatic keyguard* > *On* or *Off*.
2. If you select *On*, *Set delay:* is displayed.
3. Enter the delay time (in minutes and seconds), and select *OK*.

When keyguard is on, it may be possible to dial the emergency number programmed into your phone.

Touch tones

Touch tones are the tones that sound when you press the keys on your phone keypad. You can use touch tones for many automated dial-up services such as banking and airlines or for entering your voicemail box number and password.

Touch tones are sent during an active call. You can send them manually from your phone keypad, or send them automatically by saving them in your phone.

Set type

1. At the main screen, select *Menu > Settings > Phone settings > Touch tones > Manual Touch tones*.
2. Select one of the following options:
 - Continuous*—The tone sounds for as long as you press and hold a key.
 - Fixed*—Used to send tones of the duration you specify in the *Touch tone length* option.
 - Off*—Used to turn off tones. No tones are sent when you press a key.

Set length

You can also specify touch tone length when using the *Fixed* option.

At the main screen, select *Menu > Settings > Phone settings > Touch tones > Touch tone length > Short* (0.1 second) or *Long* (0.5 second).

Welcome note

You can write a welcome note which briefly appears on the screen whenever you switch your phone on.

Predictive text input is not available for entering Welcome note text.

1. At the main screen, select *Menu > Settings > Phone settings > Welcome note*.
2. Enter a note (up to 44 characters).

Press * to display and select from available special characters.

3. When you are finished, select *Options* > *Save*.

Select *Delete* if you want to delete the previous text and begin creating another welcome note.

My banner

You can choose whether the display shows Virgin Mobile's logo or your own banner in text when the phone is in the idle state.

At the main screen, select *Menu* > *Settings* > *Phone settings* > *My banner* > *Default* or *Customize*.

Help text activation

Your phone displays brief descriptions for most menu items. When you arrive at a feature or menu, pause for about 10 seconds, and wait for the help text to display. Scroll through the full help text, if necessary.

The default setting for help text is on. However, you can turn help text on or off.

At the main screen, select *Menu* > *Settings* > *Phone settings* > *Help text activation* > *On* or *Off*.

Display brightness

You can change the brightness of your phone display.

1. At the main screen, select *Menu* > *Settings* > *Phone settings* > *Display brightness*.
2. Scroll up and down to adjust the brightness level to your preference.
3. Select *OK* to accept your settings.

■ Phone details

To view specific information about this phone, select *Menu* > *Settings* > *Phone details* and one of the following:

Own number (MDN)—Displays the mobile directory number, or phone number.

Software version—Displays the current software version.

Browser version—Displays the current version of the minibrowser used with VirginXtras.

■ Time and date settings

Clock

Show or hide the clock

At the main screen, select *Menu* > *Settings* > *Time and date settings* > *Clock* > *Show clock* or *Hide clock*.

Set the time

1. At the main screen, select *Menu* > *Settings* > *Time and date settings* > *Clock* > *Set the time*.
2. Enter the time in *hh:mm* format, and select *OK*.
3. Select *am* or *pm* (only when the 12-hour format is in use).

Change the format

At the main screen, select *Menu* > *Settings* > *Time and date settings* > *Clock* > *Time format* > *24-hour* or *12-hour*.

Date

Show or hide the date

At the main screen, select [Menu](#) > [Settings](#) > [Time and date settings](#) > [Date](#) > [Show date](#) or [Hide date](#).

Set the date

1. At the main screen, select [Menu](#) > [Settings](#) > [Time and date settings](#) > [Date](#) > [Set the date](#).
2. Enter the date, and select [OK](#).

Change the date format

At the main screen, select [Menu](#) > [Settings](#) > [Time and date settings](#) > [Date](#) > [Date format](#) and the format of your choice.

Date separator

At the main screen, select [Menu](#) > [Settings](#) > [Time and date settings](#) > [Date](#) > [Date separator](#) and the separator of your choice.

Set the auto-update

Auto-update is a network service. See "Network Services," p. 8.

You can allow the digital network to set the clock, which is useful when you are out of your home area (for example, when you travel to another network or time zone).

At the start screen, select [Menu](#) > [Settings](#) > [Time and date settings](#) > [Auto-update of date & time](#) > [On](#), [Confirm first](#), or [Off](#).

If you use the [Auto-update of date & time](#) option while outside your digital network, you may be prompted to enter the time manually. Network time will replace the time and date when you re-enter your digital network.

Settings

If your battery is removed or discharged outside the digital network, you may be prompted to enter the time manually (when the battery is replaced or recharged and you are still outside of the digital network).

■ Voice navigation


Voice navigation allows you to quickly perform certain commands by speaking them, instead of using the keypad to access them. For example, you can switch your profile, call voicemail, playback a voice memo, or review recent calls by speaking the recorded command.

Add a voice command

Before using a voice command, you must add the command to the phone function by recording it.

1. At the main screen, select *Menu > Settings > Voice navigation*.
2. Select the phone function you wish to tag: *Profiles*, *Voice mailbox*, *Voice memo*, or *Recent Calls*.
3. If necessary, select an option associated with that function, and select *Options > Add command*.
4. Select *Start*, and speak the voice command clearly into the phone.

Do not select *Quit* unless you want to cancel the recording.

The phone replays then saves the recorded command.  appears next to functions that have voice commands assigned.

Activate a voice command

After you have associated a voice command with a phone function, you can request the function by speaking the voice command.

1. At the main screen, select and hold *Contacts*.

2. When *Speak now* appears, speak the voice command clearly into the phone. When the phone finds the voice command, *Found:* appears, and the phone plays the recognized voice command through the earpiece. The function you requested is activated.

Voice command options

After you have associated a voice command with a function, select one of the following options:

Playback—Listen to the voice command.

Change—Change the voice command.

Delete—Erase the voice command.

■ Enhancement settings

The enhancement settings menu is shown only if the phone has been connected to a compatible enhancement.

At the main screen, select *Menu* > *Settings* > *Enhancement settings* > *Headset*, *Handsfree*, *Loopset*, or *Charger* and the desired accessory.

■ Security settings

Phone lock

The phone lock feature protects your phone from unauthorized outgoing calls or unauthorized access to information stored in the phone. When phone lock is activated, Phone locked is displayed each time you turn your phone on.

When the phone is locked, calls still may be possible to the official emergency number programmed into your phone.

Settings

1. At the main screen, select *Menu > Settings > Security settings*.
 2. Enter the lock code, and select *OK*.
 3. Select *Phone lock* and one of the following options:
 - Off*—Immediately turns off the phone lock feature.
 - Lock now*—Turns the phone lock feature on immediately.
 - On power-up*—Turns the phone lock feature on immediately after the phone is turned off and then on.
- Call not allowed* is displayed if you attempt to place a call while the phone is locked. To answer a call with phone lock on, select *Answer*, or press **Call**.

Allowed phone number when phone locked

When phone lock is on, the only outgoing calls that can be made are to the emergency number programmed into your phone (for example, 911 or other official emergency number) or the number stored in the Allowed number when phone locked location.

1. At the main screen, select *Menu > Settings > Security settings*.
2. Enter the lock code, and select *OK*.
3. Select *Allowed number when phone locked*.
4. Enter the phone number and select *Assign* if the slot is empty; or select *Options > Change* to change the phone number. *Search*, recall the number from the phone book, and select *OK*.

Change the lock code

Tip: Avoid using codes similar to emergency numbers such as 911 to prevent accidental dialing of the emergency number.

The lock code controls access to features and is supplied with the phone. The preset lock code is the last four digits of your phone number. When you change the lock code, keep the new code secret and in a safe place separate from your phone.

1. At the main screen, select *Menu > Settings > Security settings*.
2. Enter the current lock code (the default is the last four digits of your phone number), and select *OK*.
3. Select *Change lock code*.
4. Enter the new lock code (4 characters), and select *OK*.
5. Reenter the new lock code for verification, and select *OK*.

Restrict calls

You can restrict the calls your phone can make and receive. When calls are restricted, calls still may be possible to the official emergency number programmed into your phone.

1. At the main screen, select *Menu > Settings > Security settings*.
2. Enter the lock code, and press *OK*.
3. Select *Call restrictions* and the types of calls you wish to restrict:
 - Restrict outgoing calls*—Calls cannot be made.
 - Restrict incoming calls*—Calls cannot be received.
4. Select one of the following options:
 - Select*—Restricts a specific number or *All calls*. Select *Mark* to enable a restriction.
 - Add restriction*—Enter a specific number and name, or select *Search* to enter a number from the contacts list.
 - Edit*—Allows you to edit previously entered restricted numbers.
 - Delete*—Allows you to delete previously entered restricted numbers.

■ Restore factory settings

You can reset some of the menu settings to their original values. Data that you have entered or downloaded is not deleted (for example, entries in your contacts list are not affected).

1. At the main screen, select *Menu* > *Settings* > *Restore factory settings*.
2. Enter the lock code (the default lock code is the last four digits of your phone number), and select *OK*.

10. Gallery



Gallery is where your downloaded tones and pictures are stored.

Your device has a limited amount of memory for storing files in *Gallery*. This memory is not shared with other functions, such as contacts. If the device displays a message that the memory is full, delete some existing files before proceeding.

■ Open My Stuff

At the start screen, select *Menu* > *Gallery*. The following submenus are displayed:
View folders—Explore the folders in the My Stuff menu. See "View folders" in the following section for more info.

Add folder—Add a folder of your own.

Delete folder—Delete a folder you have created.

Rename folder—Rename a folder you have created.

Get new > *Get image*, *Get tone*—Download new images or ringing tones.

■ View folders

1. At the start screen, select *Menu* > *Gallery* > *View folders* > *Images*, *Graphics*, *Tones*, or a folder you have created , > *Open*.
2. Select from the list of graphics or tones; then select *Options* > *Open*, *Delete*, *Move*, *Rename*, *Set as wallpap*. (for graphics or image files), *Details*, or *Sort* to enter the folder submenus.

11. Tools




Your phone features some helpful tools, including an alarm clock, calendar, voice memo, calculator, countdown clock, and stopwatch.

■ Alarm clock

Set an alarm

The alarm clock is based on the phone clock. It sounds an alert any time you specify and works even when the phone is turned off.

1. At the main screen, select *Menu > Tools > Alarm clock*. If the alarm has been previously set, select *On*.
2. Enter the time for the alarm in *hh:mm* format, and select *OK*.
3. Select *am* or *pm* if 12-hour format has been selected.

Alarm on appears briefly in the display, and  appears on the main screen.

Alarm conditions

When the alarm sounds, your phone beeps and/or vibrates (if vibrate alert is on in the currently active profile), and lights up.

With the phone on, select *Stop* to shut the alarm off, or select *Snooze*. If you select *Snooze*, the alarm stops for 10 minutes, and *Snooze on* is displayed.

If you do not press a key, the alarms stops after 1 minute and snoozes for 10 minutes, then sounds again.

If the alarm time is reached while the phone is switched off, the phone switches itself on and starts sounding the alarm tone. If you select *Stop*, the phone asks whether you want to activate the phone for calls. Select *No* to switch off the phone or *Yes* to make and receive calls. Do not select *Yes* when wireless phone use may cause interference or danger.

Turn an alarm off

At the main screen, select *Menu* > *Tools* > *Alarm clock* > *Off*.

■ Calendar

The calendar keeps track of reminders, calls you need to make, meetings, memos, and birthdays. It can even sound an alarm for any of these events.

Monthly view provides an overview of the selected month and weeks. It also allows you to jump to a specific date. Any days or dates that appear in bold font contain calendar notes such as a meeting or reminder.

Open

At the main screen, select *Menu* > *Tools* > *Calendar*.

You can move the cursor in some calendar views with the scroll keys.

Go to a date

1. At the main screen, select *Menu* > *Tools* > *Calendar* > *Options* > *Go to date*.
2. Enter the date (for example, 07/15/2004), and select *OK*.

Note a specific date

Your phone asks for further information depending on the type of note you select. You can also set an alarm for your note.

1. Go to the date for which you want to set a reminder. See "Go to a date," p. 73.

Tools

2. From the monthly view, with the date highlighted, select *Options* > *Make a note*.
3. Select one of the following note types:
 - Meeting*—You are prompted to enter a subject, location, and a start and end time. You are then given the option to set an alarm.
 - Call*—You are prompted to enter a phone number, a name, and the time. You are then given the option to set an alarm.
 - Birthday*—You are prompted to enter the person's name and year of birth. You are then given the option to set an alarm.
 - Memo*—You are prompted to enter a subject and an end date. You are then given the option to set an alarm.
 - Reminder*—You are prompted to enter the subject of the reminder. You are then given the option to set an alarm.
4. Enter your note, and select *Options* > *Save*.

View notes (day view)

After you have created some calendar notes, you can view them as follows:

1. At the main screen, select *Menu* > *Tools* > *Calendar*.
2. Scroll to the date containing the note.

Any days containing notes will be in bold type.
3. Select *Options* > *View day*.
4. To view a highlighted note, select *Options* > *View*.

Options while viewing a list of notes

Select *Options* while viewing a list of a day's notes and one of the following:

The options listed below are available while viewing the title of a note.

View—View the full note.

Make a note—Create a new note for the selected date.

Delete—Delete the note.

Edit—Edit the note.

Move—Move the note to another date on your calendar.

Repeat—Enable the note to recur on a regular basis. Select *Every day*, *Every week*, *Every 2 weeks*, *Every month*, *Every year*, or *Not repeated*.

Tip: Repeat is not available for Birthday note.

Go to date—Jump to another date on your calendar.

Send note—Send the note to another phone using text message, or in calendar format.

Copy—Copy the note. You can then paste the note to another date.

Settings—Set the date and time, format, the day each week starts, and whether you want your notes to auto-delete after a specified time.

Send a note

You can send a calendar note to another compatible phone. Multiple text messaging charges may apply. Check with Virgin Mobile for details.

1. At the main screen, select *Menu* > *Tools* > *Calendar*.
2. Scroll to the date containing the note you wish to send.
Any days containing notes will be in bold type.
3. Select *Options* > *View day*.
4. Select the note you wish to send and *Options* > *Send note* > *Via calendar* or *Via text msg*.
5. If you select *Via calendar*, enter the number for the recipient; or select *Search* to retrieve a number from the contacts list and *OK*. The note is sent.
6. If you select *Via text msg*., select *Add number*.

Tools

7. Enter the number for the recipient; or select [Search](#) to retrieve a number from the contacts list and [OK](#).
8. Select [Options](#) > [Send](#).

Receive notes

When you receive a calendar note, your phone displays notification that the calendar note arrived. Save the note in your calendar, and set an alarm for any date and time.

View notes

1. When your phone displays notification that the calendar note arrived, select [Show](#).
2. Scroll to view the entire message, if necessary.

Save notes

After viewing the calendar note, select [Options](#) > [Save](#).

Discard notes

After viewing the calendar note, select [Options](#) > [Discard](#).

Voice memo

This feature allows you to record a speech or sound memo with your phone and listen to it later. The total available time is 60 seconds if no memos have been stored. The maximum length of a recording depends on how much memory remains available. The recorder cannot be used when you are using VirginXtras.

Record speech or sound

1. At the main screen, select [Menu](#) > [Tools](#) > [Voice memo](#) > [Record](#).
2. After the recorder start tone is heard, begin recording speech or sound.
3. When you are finished recording, select [Stop](#).
4. Type in a name for the recording, and select [OK](#). The recording is saved to the recording list.

Record list options

1. When you have saved a recording, at the main screen, select *Menu > Tools > Voice memo > Recordings list*.
2. Scroll through the list to find your recording; then, select *Options* and one of the following:
 - Playback*—Listen to the recording using the earpiece.
 - Delete*—Erase the recording.
 - Edit title*—Rename the recording.
 - Add alarm*—Add an alarm to the recording.

Calculator

The calculator on your phone adds, subtracts, multiplies, divides, calculates the square and the square root, changes the sign of the number entered, and converts currency values.

This calculator has a limited accuracy and is designed for simple calculations.

1. At the main screen, select *Menu > Tools > Calculator*.
2. Enter the first number in the calculation.

Press # for a decimal point if necessary.

Press * to cycle through the add (+), subtract (-), multiply (*), and divide (/) characters. Pause briefly to select the displayed character.

3. Enter the second number in your calculation.
4. Select *Options* (equals is highlighted).

To perform a square or square root calculation, select *Options > Square* or *Square root*. Select *Options > Change sign* to change the sign of your result.

Currency converter

You can convert foreign currency to domestic or vice versa.

1. At the main screen, enter a currency amount to convert.
2. Select *Options* > *To home* or *To foreign*.

To home—converts foreign currency to domestic currency.

To foreign—converts domestic currency to foreign currency.

If you have not done so already, you are prompted to enter the exchange rate.

3. Enter the exchange rate (press # to insert a decimal), and select *OK*.

You can also edit the exchange rate at any time.

When you change base currency, you must enter the new rates because all previously set exchange rates are set to zero.

1. At the main screen, select *Menu* > *Tools* > *Calculator* > *Options* > *Exchange rate* > *Foreign unit expressed in domestic units* or *Domestic unit expressed in foreign units*.

Foreign unit expressed in domestic units—The number of home units it takes to make one unit of foreign currency.

Domestic unit expressed in foreign units—The number of foreign units it takes to make one unit of your home currency.

2. Enter the exchange rate, and select *OK*.


Countdown timer

You can enter a specified time (up to 99 hours and 59 minutes). When the time runs out, your phone sounds an alarm.

The countdown timer only works when the phone is on. When you turn off your phone, the timer is no longer active.

Set the countdown timer

1. At the main screen, select *Menu > Tools > Countdown timer*.
2. Enter the time (in *hh:mm* format), and *OK*.
3. Enter a note for the timer, and *OK*.

 appears on the main screen when the countdown timer is set.

When the timer runs out, your phone sounds an alarm and flashes its lights. The timer note is displayed on the main screen. If you are using a phone function when the alarm sounds, the timer note is displayed when you return to the main screen.

- Press any key during the alarm to stop the timer.
- At the main screen, select *OK* to clear the timer note.
- After 60 seconds the timer alert stops automatically.

Change the time

After you have set the timer, you can change the time.

1. At the main screen, select *Menu > Tools > Countdown timer > Change time*.
2. Enter the new time, and select *OK*.
3. Leave the note as it was; or enter a new note, and select *OK*.

Stop the timer before the alarm sounds

After you have set the timer, you can stop the timer.

At the main screen, select *Menu > Tools > Countdown timer > Stop timer*.

Stopwatch

Your phone has a stopwatch that can be used to track time. The stopwatch displays time in hours, minutes, seconds, and fractions of a second in *hh:mm:ss.s* format.

Using the stopwatch or allowing it to run in the background when using other features increases the demand on battery power and reduces the battery life.

Split or Lap time

Use the split time function for such things as a long distance race when you need to pace yourself.

1. At the main screen, select *Menu* > *Tools* > *Stopwatch* > *Split timing* or *Lap timing* > *Start*.

Split timing—You can use the split time function to pace yourself as you might do during a race. Select *Split* to note the lapsed time. The timer continues to run and the split time appears below the running time. Each time you select *Split*, the new measured time appears at the beginning of the list.


Lap timing—You can use the lap time function to track how long it takes to complete a cycle or lap. Select *Lap* to note the lap time. The timer stops, then immediately returns to zero for the next lap. The lap time appears below the running time. Each time you select *Lap*, the new measured time appears at the beginning of the list.

2. Select *Stop* to end timing and display total time.

Save, view or delete split and lap times

- To save a time while the timer is running select *Stop* > *Save*, enter a name for the measurement, and select *OK*. If you do not enter a name, the total time is used as the default title for the lap or split time.
- To view the last measured time, from the main screen, select *Menu* > *Tools* > *Stopwatch* > *Split timing* or *Lap timing* > *Show last time*.
- To browse saved times, from the main screen, select *Menu* > *Tools* > *Stopwatch* > *Split timing* or *Lap timing* > *View times*.
- To delete a saved time, from *Stopwatch*, select *View times* > *Select* > *Delete* or select *Delete times* > *One by one* or *Delete all*.

Operation note

If you press **End** and return to the main screen, the timer continues to run in the background, and  appears in the upper left corner of the screen.

To return to the stopwatch, do the following:

1. At the main screen, select *Menu* > *Tools* > *Stopwatch* > *Continue*.
2. To stop the timer, select *Stop*.

12. Games



Challenge yourself to one of the fun games on your phone.

Some menus listed are network services. Contact Virgin Mobile for more information.

■ Game settings

At the main screen, select *Menu* > *Games* > *Settings* > *Game sounds*, *Game lights*, or *Shakes*.

■ Play a game

1. At the main screen, select *Menu* > *Games* > *Select game*.
2. Select a game.
3. Options and submenus vary with each game. Select one of the following options, if supported by the game:

New game—Launches a new game.

High scores—View the high scores for this game (if previously played).

Instructions—View instructions for playing the game. Select *More* for more information.

13. Enhancements

Check the model number of any charger before use with this phone. This phone is intended for use when supplied with power from a Nokia ACP-7, Nokia ACP-12, Nokia AC-1, or Nokia LCH-12 charger.



Your phone contains a Standard 1150-mAh Li-Ion Battery (BL-6C).



Warning: Use only batteries, chargers and enhancements approved by Nokia for use with this particular model. The use of any other types may invalidate any approval or warranty, and may be dangerous. For availability of approved enhancements, please check with your dealer.

A few practical rules about accessories and enhancements:

- Keep all accessories and enhancements out of the reach of small children.
- When you disconnect the power cord of any accessory or enhancement, grasp and pull the plug, not the cord.
- Check regularly that enhancements installed in a vehicle are mounted and are operating properly.
- Installation of any complex car enhancements must be made by qualified personnel only.

Power

- Standard 1150-mAh Li-Ion Battery (BL-6C)
- Standard Charger (ACP-7)
- Travel Charger (ACP-12)
- Retractable Charger (AC-1)
- Mobile Charger (LCH-12)

Enhancements

Headset and Audio

- Boom Headset (HDB-4)
- Ear Bud Headset (HS-5)
- Retractable Headset (HS-10)
- Inductive Loopset (LPS-4)

Car and Desk Stand

- Desk Stand (DCV-14)
- Easy-to-use Handsfree (HF-3)
- Headrest Handsfree (BHF-3)

Miscellaneous

- Data Cable (CA-42)
- Xpress-on Color Covers
- Carry Case

See www.nokia.com/phones for more information about enhancements.

14. Purchasing accessories

To purchase accessories for your new phone such as a hands-free headset, carrying case, or car power adapter, please visit www.virginmobileusa.com.

15. Battery information

This section provides information about batteries, chargers, safety guidelines and technical information. Be aware that the information in this section is subject to change as batteries and chargers change.

Charging and discharging batteries

Your phone is powered by a rechargeable battery. The full performance of a new battery is achieved only after two or three complete charge and discharge cycles. The battery can be charged and discharged hundreds of times but it will eventually wear out. When the talk and standby times are noticeably shorter than normal, replace the battery. Use only Nokia approved batteries, and recharge your battery only with Nokia approved chargers designated for this phone.

Unplug the charger from the electrical plug and the phone when not in use. Do not leave a fully charged battery connected to a charger, since overcharging may shorten its lifetime. If left unused, a fully charged battery will lose its charge over time.

Use the battery only for its intended purpose. Never use any charger or battery that is damaged.

Do not short-circuit the battery. Accidental short-circuiting can occur when a metallic object such as a coin, clip, or pen causes direct connection of the positive (+) and negative (-) terminals of the battery. (These look like metal strips on the battery.) This might happen, for example, when you carry a spare battery in your pocket or purse. Short-circuiting the terminals may damage the battery or the connecting object.

Leaving the battery in hot or cold places, such as in a closed car in summer or winter conditions, will reduce the capacity and lifetime of the battery and its ability to charge. Always try to keep the battery between 59°F and 77°F (15°C and 25°C). A phone with a hot or cold battery may not work temporarily, even when the battery is fully charged. Battery performance is particularly limited in temperatures well below freezing.

Do not dispose of batteries in a fire, as they may explode. Batteries may also explode if damaged. Dispose of batteries according to local regulations. Please recycle when possible. Do not dispose as household waste.

■ Nokia battery authentication guidelines

Always use original Nokia batteries for your safety. To check that you are getting an original Nokia battery, purchase it from an authorized Nokia dealer, look for the Nokia Original Enhancements logo on the packaging and inspect the hologram label using the following steps:

Successful completion of the four steps is not a total assurance of the authenticity of the battery. If you have any reason to believe that your battery is not an authentic original Nokia battery, you should refrain from using it and take it to the nearest authorized Nokia service point or dealer for assistance. Your authorized Nokia service point or dealer will inspect the battery for authenticity.

If authenticity cannot be verified, return the battery to the place of purchase.


Authenticate hologram



1. When looking at the hologram label, you should see the Nokia connecting hands symbol from one angle and the Nokia Original Enhancements logo when looking from another angle.



2. When you angle the hologram to the left, right, down, and up sides of the logo, you should see 1, 2, 3, and 4 dots on each side respectively.



3. Scratch the side of the label to reveal a 20-digit code, for example, 12345678919876543210. Turn the battery so that the numbers are facing upwards. The 20-digit code reads starting from the number at the top row followed by the bottom row.
4. Confirm that the 20-digit code is valid by following the instructions at www.nokia.com/batterycheck.

What if your battery is not authentic?

If you cannot confirm that your Nokia battery with the hologram label is an authentic Nokia battery, please do not use the battery. Take it to the nearest authorized Nokia service point or dealer for assistance. The use of a battery that is not approved by the manufacturer may be dangerous and may result in poor performance and damage to your phone and its enhancements. It may also invalidate any approval or warranty applying to the phone.

To find out more about original Nokia batteries visit www.nokia.com/battery.

■ Charging times

The following charging times are approximate with the BL-6C 1150 mAh Li-Ion battery:

Travel Charger (ACP-12): up to 1 hour 45 minutes

Standard Travel Charger (ACP-7): up to 3 hours 45 minutes

■ Talk and standby times

Operation times are estimates only and depend on signal strength, network conditions, user habits (phone use, features used, and number of idle hand-off), battery age and condition (including charging habits), temperatures to which the battery is exposed, and many other factors.

Talk time: 3.7 up to 4.6 hours

Standby time: 139 up to 212 hours

Care and maintenance

Your device is a product of superior design and craftsmanship and should be treated with care. The suggestions below will help you protect your warranty coverage.

- Keep the device dry. Precipitation, humidity and all types of liquids or moisture can contain minerals that will corrode electronic circuits. If your device does get wet, remove the battery and allow the device to dry completely before replacing it.
- Do not use or store the device in dusty, dirty areas. Its moving parts and electronic components can be damaged.
- Do not store the device in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the device in cold areas. When the device returns to its normal temperature, moisture can form inside the device and damage electronic circuit boards.
- Do not attempt to open the device other than as instructed in this guide.
- Do not drop, knock, or shake the device. Rough handling can break internal circuit boards and fine mechanics.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
- Do not paint the device. Paint can clog the moving parts and prevent proper operation.
- Use a soft, clean, dry cloth to clean any lenses (such as camera, proximity sensor, and light sensor lenses).

- Use only the supplied or an approved replacement antenna. Unauthorized antennas, modifications, or attachments could damage the device and may violate regulations governing radio devices.
- Use chargers indoors.
- Always create a backup of data you want to keep, such as contacts and calendar notes, before sending your device to a service facility.

All of the above suggestions apply equally to your device, battery, charger, or any enhancement. If any device is not working properly, take it to the nearest authorized service facility for service.

Additional safety information

■ Operating environment

Remember to follow any special regulations in force in any area and always switch off your device when its use is prohibited or when it may cause interference or danger. Use the device only in its normal operating positions.

This device meets RF exposure guidelines when used either in the normal use position against the ear or when positioned at least 2.2 centimeters (7/8 inch) away from the body. When a carry case, belt clip or holder is used for body-worn operation, it should not contain metal and should position the device the above-stated distance from your body.

To transmit data files or messages, this device requires a good quality connection to the network. In some cases, transmission of data files or messages may be delayed until such a connection is available. Ensure the above separation distance instructions are followed until the transmission is completed.

Parts of the device are magnetic. Metallic materials may be attracted to the device. Do not place credit cards or other magnetic storage media near the device, because information stored on them may be erased.

■ Medical devices

Operation of any radio transmitting equipment, including wireless phones, may interfere with the functionality of inadequately protected medical devices. Consult a physician or the manufacturer of the medical device to determine if they are adequately shielded from external RF energy or if you have any questions. Switch off your device in health care facilities when any regulations posted in these areas

instruct you to do so. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.

Pacemakers

Pacemaker manufacturers recommend that a minimum separation of 15.3 centimeters (6 inches) be maintained between a wireless phone and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with the independent research by and recommendations of Wireless Technology Research. Persons with pacemakers should:

- Always keep the device more than 15.3 centimeters (6 inches) from the pacemaker when the device is switched on.
- Do not carry the device in a breast pocket.
- Hold the device to the ear opposite the pacemaker to minimize the potential for interference.

If you suspect interference, switch off your device, and move the device away.

Hearing aids

Some digital wireless devices may interfere with some hearing aids. If interference occurs, consult your service provider.

Vehicles

RF signals may affect improperly installed or inadequately shielded electronic systems in motor vehicles such as electronic fuel injection systems, electronic antiskid (antilock) braking systems, electronic speed control systems, air bag systems. For more information, check with the manufacturer or its representative of your vehicle or any equipment that has been added.

Only qualified personnel should service the device, or install the device in a vehicle. Faulty installation or service may be dangerous and may invalidate any warranty

Additional safety information

that may apply to the device. Check regularly that all wireless device equipment in your vehicle is mounted and operating properly. Do not store or carry flammable liquids, gases, or explosive materials in the same compartment as the device, its parts, or enhancements. For vehicles equipped with an air bag, remember that air bags inflate with great force. Do not place objects, including installed or portable wireless equipment in the area over the air bag or in the air bag deployment area. If in-vehicle wireless equipment is improperly installed and the air bag inflates, serious injury could result.

Using your device while flying in aircraft is prohibited. Switch off your device before boarding an aircraft. The use of wireless teledevices in an aircraft may be dangerous to the operation of the aircraft, disrupt the wireless telephone network, and may be illegal.

■ Potentially explosive environments

Switch off your device when in any area with a potentially explosive atmosphere and obey all signs and instructions. Potentially explosive atmospheres include areas where you would normally be advised to turn off your vehicle engine. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Switch off the device at refuelling points such as near gas pumps at service stations. Observe restrictions on the use of radio equipment in fuel depots, storage, and distribution areas; chemical plants; or where blasting operations are in progress. Areas with a potentially explosive atmosphere are often but not always clearly marked. They include below deck on boats, chemical transfer or storage facilities, vehicles using liquefied petroleum gas (such as propane or butane), and areas where the air contains chemicals or particles such as grain, dust, or metal powders.

■ Emergency calls



Important: Wireless phones, including this phone, operate using radio signals, wireless networks, landline networks, and user-programmed functions. Because of this, connections in all conditions cannot be guaranteed. You should never rely solely on any wireless phone for essential communications like medical emergencies.

To make an emergency call, do the following:

1. If the phone is not on, switch it on. Check for adequate signal strength.
2. Press **End** as many times as needed to clear the display and ready the phone for calls.
3. Enter the official emergency number for your present location. Emergency numbers vary by location.
4. Press **Call**.

If certain features are in use, you may first need to turn those features off before you can make an emergency call. Consult this guide or your service provider for more information.

When making an emergency call, give all the necessary information as accurately as possible. Your wireless device may be the only means of communication at the scene of an accident. Do not end the call until given permission to do so.

■ Certification information (SAR)

This mobile device meets guidelines for exposure to radio waves.

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety

Additional safety information

margins designed to assure the protection of all person, regardless of age and health.

The exposure guidelines for mobile devices employ a unit of measurement known as the Specific Absorption Rate or SAR. The SAR limit set by ICNIRP is 2.0 watts/kilogram (W/kg) averaged over 10 grams of tissue. Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. The actual SAR level of an operating device can be well below the maximum value because the device is designed to use only the power required to reach the network. That amount changes depending on a number of factors such as how close you are to a network base station. The highest SAR value when tested according to international testing procedures for use at the ear is 0.54 W/kg.

Use of device accessories and enhancements may result in different SAR values. SAR values may vary depending on national reporting and testing requirements and the network band. Additional SAR information may be provided under product information at www.nokia.com.

Your mobile device is also designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA) and Industry Canada. These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use at the ear is 1.01 W/kg and when properly worn on the body is 0.49 W/kg.

Information about this device can be found on the FCC's website at <http://www.fcc.gov/oet/fccid> by searching the equipment authorization system using FCC ID: QMNRH-90.

■ Hearing aid compatibility (HAC)

Your mobile device model complies with FCC rules governing hearing aid compatibility. These rules require an M3 microphone or higher value. The M-value, shown on the device box, refers to lower radio frequency (RF) emissions. A higher M-value generally indicates that a device model has a lower RF emissions level, which may improve the likelihood that the device will operate with certain hearing aids. Some hearing aids are more immune than others to interference. Please consult your hearing health professional to determine the M rating of your hearing aid and whether your hearing aid will work with this device. More information on accessibility can be found at www.nokiaaccessibility.com.

■ Technical information

Feature	Specification
Dimensions	Width 42.2 mm Length 102.4 mm Depth 21.5 mm
Weight	88 g with BL-6C Li-Ion Battery
Wireless networks	CDMA 1900
Volume	70 cc
Frequency range (Tx)	PCS: 1851.25–1908.75 MHz
Frequency Range (Rx)	PCS: 1931.25–1988.75 MHz
GPS	1575.42 MHz

Index

A

- alarm clock 72
- antenna 17
- anykey answer 59
- automate voicemail 39
- automatic redial 59
- auto-update 65

B

- back cover
 - removing 18
 - replacing 18
- banner 63
- battery
 - authentication 87
 - charging 19
 - charging times 89
 - removing 18
 - replacing 18
 - talk and standby times 89
- battery information 86
- business cards 55

C

- calculator 77
- calendar 73
- call settings 58
- caller groups 52
 - setting up 52
- calling cards 59

- calls
 - answering 23
 - in-call options 24
 - making 22
- certification information (SAR) 95
- charger
 - connecting 19
 - times 89
- check balance 28
- contact information 47
- contact name 48
- contacts 46
- contacts list
 - add 46
 - additions 48
 - delete 48
 - edit 53
 - search 46
 - settings 48
- countdown timer 78
- currency converter 78

D

- dialing codes 40
- display language 61
- download ringtone 42

E

- edit
 - contact name 48
- emergency calls 95
 - with keypad locked 61
- enhancement settings 67

- enhancements 83
- exchange rate 78
- exit VirginXtras 43

F

- FCC information 95

G

- games 82

H

- headset 20
- help 9
- help text 16, 63

I

- incoming calls 45
- indicators and icons 12

K

- Keyguard 24
- keyguard
 - automatic 61

L

- languages 61
- lap time 80
- location info sharing 58
- lock code 67

- change 68
- loudspeaker 23

M

- main screen 12
- message folders 34
- messages
 - delete 37
 - text messages 29
 - voice messages 38
- my account 28
- my banner 63
- my phone no. 52

N

- Network services 8
- Nokia Care Contact Center 9

O

- outgoing calls 45

P

- phone lock 67
 - numbers allowed 68
- phone settings 61
- predictive text 26
- profiles 56

Q

- quick keys 12

R

- restore factory settings 70
- restrict calls 69
- ringtone, download 42

S

- safety 6
 - important safety information 92
- save
 - addresses and notes 47
 - numbers, text items, details 47
- scrolling 14
- security settings 67
- set
 - date 65
 - time 64
- settings 56
 - call 58
- shared memory 9
- shortcuts 15
- speakerphone 23
- speed dial 49
- speed dialing 59
- split time 80
- standby time 89
- stopwatch 79

T

- talk and standby times 89
- talk time 89
- technical information 97

- template 30
- text entry 25
- text message
 - template 30
- text messages 29
- time and date settings 64
- timed profiles 57
- tone settings 58
- tools 72
- top-up the account 28
- touch tones 62
 - set length 62
 - set type 62
- turn phone off 19
- turn phone on 19

V

- view
 - call times 45
 - incoming calls 45
 - missed calls 44
 - saved messages 35
- Virgin Alerts 38
- VirginXtras
 - exit 43
 - sign on 41
- voice commands 66
- voice dialing 50
- voice messages 38
- voice navigation 66
- voice tags 50
 - assign a tag 50
 - options 51

- voicemail
 - automate 39
- voicemail set up 38
- volume
 - adjusting 23
 - using the speakerphone 23

W

- welcome note 62

X

- Xpress-on covers 20

