




# Wireless smart gateway

## G01-ZB

### Instructions for wireless smart gateway

#### ● Product Brief

This intelligent gateway uses wireless ZigBee technology to interact with products such as intelligent interactive terminals. The wireless ZigBee technology has the characteristics of low complexity, short delay, low power consumption, low rate, and large network capacity, which guarantees the safety and reliability of the product. The appearance of this product is simple and elegant, and the operation is simple and convenient. After accessing the network, it can be controlled remotely through the mobile phone APP.

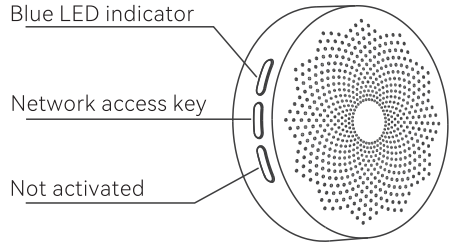


#### ● Specifications

Product No.	G01-ZB
Operating Voltage	AC90-240V 50 ~ 60Hz alternating current
Working current	< 1A
Working frequency	2.4GHz
Communication method	Zigbee+WiFi
Wireless technology	Zigbee 802.15.4+WiFi 802.11 b/g/n
Transmit power	Max 20dBm(WiFi)/19dBm(Zigbee)
Wireless distance	Indoor 30~50m
Maximum number of connections	Max Mode=50
Working environment	Temperature-10°C ~ +55°C, Humidity≤95%RH, No condensation
Applicable place	Indoor
Size	φ80*H50.5mm

#### ● Light instructions

Blue LED light	Meaning
Instructions	Zigbee status
Flashing	Allow child devices to access the network
Long bright	Inactivated
Light off	Activated

# Wireless smart gateway



## ● APP download and use

Users please scan the following QR code or download and install the "Tuya Smart" APP in the mobile application market, and register for use after the installation is complete.



## ● Internet access settings

- Turn on the Bluetooth of the mobile phone and ensure that the mobile phone is connected to the WiFi in the 2.4GHz band;
- Power on the gateway;
- Open the homepage of Tuya Smart APP, click "+"-"Add Device" in the upper right corner, and wait for the APP to discover the device. If the device has not been found, press and hold the gateway function reset button for 10 seconds, and complete the reset operation according to the prompt tone.
- Click the discovered gateway icon - click the "+" sign next to "Meian Multimode Gateway";
- Enter the current WIFI account password, click Next, and wait for the device to be added successfully before use.

**Reset WiFi:** Press and hold the network button and follow the device voice prompts to complete the operation.

## ● FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

### FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**NOTE 2:** Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.