


User Manual
Bluetooth Receiver
Model Name: hi-Freedom
FCC ID: R2MHI-FREEDOM

User manual

- 1 Tasto accensione / multifunzione
- 2 LED di funzionamento
- 3 Volume + / brano successivo
- 4 Volume - / brano precedente
- 5 Microfono per vavavoce
- 6 Porta Dock
- 7 Jack 3,5mm line out / cuffie
- 8 Basetta di ricarica
- 9 Connettore USB di ricarica

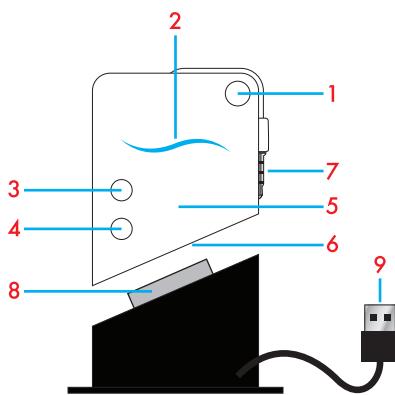

hi-Freedom USER MANUAL

Connect hi-Freedom to a music player

hi-Freedom has several options to connect to different music players:

- 1) It can be connect to a docking station equipped with a Dock Apple connector. In this case hi-Freedom transmits the audio signal through the Dock plug (6) and the docking station charge hi-Freedom as if it were an iPod. Therefore hi-Freedom can make wireless every docking station. The volume buttons on hi-Freedom front side control the output volume. If the docking station has its own volume control place it on 3/4 of its scale.
- 2) It can be connect to a plug AUX IN / LINE IN with standard jack 3.5mm of a stereo audio system (amplifier, car radio, compact systems) through included jack 3.5mm (7). In this case hi-Freedom transmits the audio signal but it is not recharging. The volume buttons on hi-Freedom front side control the output volume. If the stereo audio system has its own volume control it can be used in combination with the hi-Freedom one to control the output volume.
- 3) hi-Freedom is equipped with a jack stereo 3.5mm (7), which can be connected to headphones and earphones through jack adapter female-female provided. In this case hi-Freedom transmits the audio signal but it is not recharging. The volume can be adjusted using the buttons on hi-Freedom front side.

MAIN FUNCTIONS

- 1) Switch on hi-Freedom.

To switch on hi-Freedom hold the button (1) until the LED (2) turns on. Afterwards hi-Freedom automatically connects itself to the last paired device, if available, and the LED (2) flash slowly in blue to confirm the connection. If there is no available paired device or if it is out of reach of hi-Freedom, it turns off in about 4 minutes in order to avoid battery discharging.

- 2) Pair hi-Freedom with a compatible device.

The first time you switch on hi-Freedom, it is set in pairing mode, identified by the LED (2), which flashes alternately red and blue. Now you can select hi-Freedom from the list of found devices on your mobile phone or other Bluetooth compatible devices. As soon as the device is paired the indication LED (2) flashes slowly in blue.

Now is possible to listen to the music or make and receive calls* through the internal microphone (5).

If hi-Freedom was previously paired to a different device, is possible to turn it again in pairing mode to pair another device. You need to switch off hi-Freedom and switch it on holding the button (1) until the LED (2) flashes alternately red and blue.

- 3) Switch off hi-Freedom.

To switch off hi-Freedom hold the central button (1) until the LED (2) flashes in red. hi-Freedom will turn off immediately.

*Only if paired to a mobile phone.

PLAYING MUSIC

Thanks to the buttons on hi-Freedom front side it is possible to play, pause and select previous and next songs on the paired device. The volume control on hi-Freedom affects both jack and dock output.

- 1) To play press shortly the button (1). When music is playing the LED (2) turns on in blue.
- 2) To adjust the volume hold at least for 2 seconds the volume button "+" (3) to increase it or hold at least for 2 seconds the volume button "-" (4) to reduce it.
- 3) To move to the next song in your playlist press shortly the button "+" (3). To move to the previous song in your playlist press shortly the button "-" (4).
- 4) To stop the music press shortly the button (1).

- 5) It is even possible to control all the functions previously explained from the paired device, if supported.

WARNING: Before using hi-Freedom, play the music without wearing the earphones or reducing the volume of the stereo system, in order to be sure that is not too loud to avoid ear damage.

MAKE AND RECEIVE A CALL

If hi-Freedom is paired to a mobile phone it is possible to make and receive calls, as using a Bluetooth headset, thanks to the internal microphone (5) and to the buttons on the front side, which work as the controls of a Bluetooth headset. Remember that when hi-Freedom is connected to the docking station it is in hands free mode and the audio of phone calls is transmitted to the docking station.

- 1) Accept a call.

To accept a call press briefly the button (1).

- 2) End a call.

To end a call press briefly the button (1) during the call.

- 3) Reject an incoming call.

To reject an incoming call hold the button (1) for 2 second until you ear a long tone, then release the button. The incoming call is rejected.

- 4) Activate voice dialing / voiceover / Siri.

If your phone supports voice dialing / voiceover / Siri you can activate it when no call is in progress.

To activate voice dialing / voiceover / Siri hold the button (1) for 2 seconds until you hear a tone from the hi-Freedom; when you hear the second tone you can pronounce the command.

- 5) Call the last selected number.

Press twice (double click) the button (1).

If the paired device supports it, you can perform all the functions described in this chapter while you are listening to the music.

CHARGE hi-Freedom

When hi-Freedom battery is discharged, indication LED (2) starts flashing red. It indicates that in few minutes hi-Freedom will be turning off in order to protect the battery.

To charge the battery put hi-Freedom on its base and connect the base cable to a charger equipped with USB port (laptop, computer, car charger, wall charger) or directly connect hi-Freedom to a compatible docking station.

It is possible to charge hi-Freedom while in use.

As soon as the charger cable is connected to a power source (base, charging cable or docking station), the LED (2) turns on red and it turns off once the charging is completed. When hi-Freedom is fully charged is possible to unplug it from the charger.

Instead of using the base or a docking station is possible to charge hi-Freedom through a charger or a cable with Dock connector.

TECHNICAL SPECIFICATIONS:

Battery life: until 12 hours

Battery duration on standby: until 10 days

Charge time: about 30 minutes

Operating range: >10 metres (>30 metres outdoor)

Weight: 60g

Size with base (cm): 7x4,5x2

Size without base (cm): 5,5x4,5x2

WARNINGS:

- Avoid listening to the music at loud volume for a long time: risk of ear damage.

- Follow the local rules about mobile phones usage and their accessories while driving.

- Keep hi-Freedom out of the reach of small children to avoid chocking hazard.

- Switch off hi-Freedom before a flight. Do not use it on a plane if not permitted by the airline.

- Keep hi-Freedom dry and avoid humidity.

- Disconnect hi-Freedom from charging cable before polishing it.

- Do not use hi-Freedom if it does get wet.

- Do not try to open, disassemble or overcharging the lithium-ion battery of hi-Freedom: danger of explosion.

- At the end of battery lifecycle do not dispose it as household waste. Dispose of batteries according to local regulations. ..Please recycle when possible.

IMPORTANT REGULATORY INFORMATION

This device complies with Part 15 of the FCC Rules: Operation is subject to the following two conditions:

1. This device may not cause harmful interference and
2. This device must accept any interference that is received, including any interference that may cause undesired operation.

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.