


English Bluetooth Headphone Amplifier

Buttons and Ports Labeled/ Operation Explained

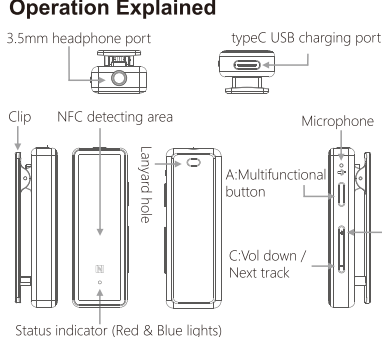

3.5mm headphone port typeC USB charging port

Clip NFC detecting area Microphone

A: Multifunctional button

B: Vol up / Prev track

C: Vol down / Next track

Status indicator (Red & Blue lights)

Functions & Operations and Indicator Display

•Power on/off
Hold the button A for about 3 seconds until the blue light flashes for three times, and the device will then power on/off.

•Enter pairing mode
1. After powered on for the first time: the device

English Bluetooth Headphone Amplifier

would automatically enter the pairing mode, and the red and blue lights will flash alternately.

2. Force the device to enter Pairing mode: Hold the button A for about 5 seconds when the device is off, and the red and blue lights will flash alternately.

3. Clear current pairing and enter a new pairing: Hold the button B and C at the same time for about 5 seconds when the device is on, the blue and red lights will flash twice simultaneously with notification sounds, and then the device will enter pairing mode with the red and blue lights flash alternately.

4. The μ BTR supports connecting with two devices at the same time.

•Enter reconnecting mode
1. After disconnection, the blue light will flash twice every three seconds; click the button A to reconnect.

2. After the device restarted, it will reconnect to the last connected device automatically.

•Operation instruction after a successful pairing
Play/Pause/Answer phone call/End calling/

English Bluetooth Headphone Amplifier

Cancel a call: Click button A
Reject phone call: Hold the button A for about 2 seconds when there's an incoming call
Volume up/down: Click button B/C turn up/down the volume
Switch songs: Hold the button B/C about 2 seconds to switch to the previous/next song
Activate Siri: Double click the button A (exclusive to iOS devices)

•One-touch NFC pairing
When the μ BTR is on and the Android device is unlocked with NFC enabled, get the two devices touched by the NFC detecting area to start the pairing

Other Indicator Display

| Status | Blue light | Red light |
|------------------------|--|---|
| 1. Device connected | Blue light flashes once every 5 seconds. | Off |
| 2. Low battery warning | Off | Red light flashes to indicate the current working status. |
| 3. Charging | Blue light flashes to indicate the current working status. | Steady (go off when blue light flashes) |
| 4. Charging completed | Blue light flashes to indicate the current working status. | Off |

English Bluetooth Headphone Amplifier

Notification Sounds

There will be notification sounds under the following status: Power on, power off, clear pairing history, Max. / Min. volume and pairing disconnected.

Notes and Precautions

- ★It's recommended to charge the device using a standard 5V charger.
- ★Please don't place the device in circumstance of excessive high/low temperature (above 45°C or below 0°C).
- ★Please keep the device away from liquids to avoid any damage to it.
- ★If the device is to be left unused for a long time, please recharge it periodically to preserve its battery life.
- ★Please adjust the volume to a suitable level before putting on the earphones to protect your hearing.

List of Items Included

μ BTR*1 USB cable*1,
Quick start guide*1 Warranty card*1

English Bluetooth Headphone Amplifier

Learn More

To learn more about the product, please visit our website: www.fii.net.

WEEE Directive & Product Disposal

At the end of its serviceable life, this product should not be handed as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Internal/Supplied Batteries
This symbol on the battery indicates that the battery is to be collected separately. This battery is designed for separate collection at an appropriate collection point.

Qualcomm aptX is a product of Qualcomm Technologies International, Ltd.
Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries, used with permission. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries, used with permission.

1) Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

2) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

3) This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FiiO

Quick Start Guide

BORN FOR

MUSIC & HAPPY

SINCE 2007

Model No.: μ BTR