



BH695

Bluetooth Mono Headset

User Manual

4. Charging the Battery

- A. The first time, please charge the device for no less than 2 hours to make sure the headset is fully charged and the battery reaches its full capacity.
 - B. Afterwards, each charge cycle may take around 2 hours.
 - C. The LED will light up in red while charging and turn off once the charging is complete.
 - D. If you have not used the item for a few months, the LED might not turn red when first charging. It may take a few minutes before the LED turns red.
 - E. When the voltage of the battery goes down to 3.3V, the red LED will flash every 10 seconds. When the voltage goes down to 3.0V, the headset will power off automatically.
- Note:** It is suggested that you use only the charger provided. Do not use chargers from any other devices as it might damage this earphone device.

5. Turn ON / OFF

- Turn ON:** From OFF, press and hold the **MFB** for 3 seconds until the blue LED fast flashes.
- Turn OFF:** From ON, press and hold the **MFB** for 3 seconds until the red LED lights for 2 seconds.

6. Pairing Bluetooth Headset to Mobile Phone

- Pairing is the process of connecting your headset with your mobile phone. Before using the headset with your mobile phone, you must pair both devices. If you wish to use your headset with a different mobile phone, you must reinstate the pairing process with your intended Bluetooth mobile phone.
- A. Ensure the headset is off.
 - B. Switch to pairing mode by holding in the **MFB** button for 6 seconds until the LED blinks blue and red alternately.
 - C. Turn on the mobile phone and place it within 1 meter of the headset.
 - D. Activate the Bluetooth function on your mobile phone and search for the accessible Bluetooth device by referring to your mobile phone user guide for details.
 - E. Select **BT Headset** from the list.
 - F. Enter the pre-programmed code **0000** and press **OK** to pair the headset and the phone. When the pairing is completed, the blue and red LED will stop flashing. The headset is under the standby mode when the blue LED flashes every 10 seconds.

C. Reject Calls

When receiving a phone call, press and hold the **MFB** button for 2 seconds to reject the call.

D. Voice-Dial

If your mobile handset is voice dialing enabled, under standby mode, press the **MFB** button once and when you hear a beep, say the voice tag. **Note:** Please make sure to record voice tag into the mobile handset before using voice dialing function. This function is only applicable to mobile handset with Bluetooth Hands-Free Profile. Functionality varies depending on the mobile handset models you have. Please refer to your mobile handset user guide for additional information.

E. Last Number Re-Dialing

Under standby mode, short press the **MFB** button twice for last number redial.

F. Adjusting the Volume

During a call, press the **V+** or **V-** button repeatedly until you reach the desired volume level.

G. Mute & Unmute (During a Conversation)

- 1. Mute the microphone: Press and hold the **V+** & **V-** button for 2 seconds.
- 2. Unmute the microphone: Press and hold the **V+** & **V-** button for 2 seconds again.

H. Transferring Calls

- 1. Headset to Mobile Phone: During a call, short press the **V+** & **V-** button once. Then the call will be routed to your mobile phone.
- 2. Mobile Phone to Headset: Short press the **V+** & **V-** button once to route the call to the headset.

I. Reject the Second Call

During a call, short press **MFB** button for 2 seconds to reject the second incoming call.

J. Hold the Call

During a call, short press the **MFB** button twice to hold the phone call. Short press the **MFB** button twice again to resume conversation.

K. Answer the Second Call

- 1. During a conversation in progress, short press the **MFB** button once to pick up the second call and end the first call.
- 2. During a conversation in progress, short press the **MFB** button twice to pick up the second call and put the first call on hold.

L. Switch between 2 Phone Calls

During the two calls in progress, short press the **MFB** button twice to swap calls.

15. LED Indication

Headset Status	LED Indication
Power off mode	LED off
Power on	Blue LED lights 5 times
Power off	Red LED lights 5 times
Standby mode	Blue LED flashes 1 time every 6 seconds
Standby mode (disconnect Bluetooth device)	Blue LED flashes 3 times every 6 seconds
Standby in low voltage	Red LED flashes 1 time every 6 seconds
Talking in low voltage	Red LED flashes once every 10 seconds
Talking in progress	Blue LED flashes once every 10 seconds
Pairing in progress	Red & Blue LED flash alternately
Mute	Blue LED flashes once every 10 seconds
Charging in progress	Red LED stays on
Charging completed	Blue LED stays on
Restore the default settings	Red & Blue LED flash alternately

16. Product Specifications

- Bluetooth Compatibility Specifications: V3.0
- Operating Frequency Band: 2.4GHz~2.48GHz unlicensed ISM Band
- Output Power: Class 2 Power Output, up to 10 meters
- Support Profiles: HSP, HFP1.5, A2DP Profiles
- Support Multiple paired Device: Up to 8 Bluetooth Phone can be paired
- Integrated with echo cancellation
- Battery status display on phone (only support IOS device)
- Battery: 61 mAh (rechargeable lithium polymer), 3.7V DC
- Talk time: about 5 Hours
- Music play time: about 4.5 Hours
- Standby time: about 180 Hours
- Charger time: about 2 Hours
- Power Input Voltage: 5V
- Operating temperature range: -20°C~ +45°C
- Weight: 15.2g

1. About Bluetooth Technology

Bluetooth wireless technology is set to revolutionize the personal connectivity. By providing freedom from wired connections-enabling links and connectivity between mobile computers, mobile phones, portable handheld devices and other Bluetooth enables devices within 10 meters. Utilizing global sound & digital data 2.4G ISM transmission, it makes global communication in the way you've never dreamed of!


2. Getting to know your Bluetooth Headset

To use your Bluetooth Headset, please follow these simple steps:

- A. Charge your Headset prior to using the Headset, it is recommended to charge the battery fully for the first time. Normal full charge time is 2 hrs. (approx.)
- B. Place your Headset and a Bluetooth-enabled mobile phone within 1 meter for pairing.

NOTE: Ensure your Headset and mobile phone is placed within 10 meters Bluetooth sensing distance. (Obstruction could cause shorter sensing distance.)

3. Appearance and Function

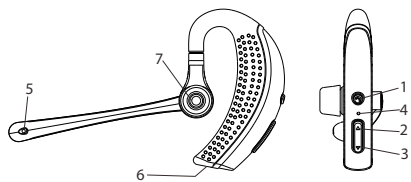

- 1. Multi-Function Button (MFB)
- 2. Volume Up (V+)
- 3. Volume Down (V-)
- 4. LED Indicator
- 5. Microphone
- 6. Charging Socket
- 7. Speaker

- G. Press **Return** to go back to your mobile phone's main menu. Please place the mobile phone and the headset within 10 meters sensing distance. You should now be able to make and receive calls using your headset.

Note: If the pairing cannot be completed within 2 minutes after the pairing mode is activated, the headset will power off automatically. Please repeat the steps above to pair the headset and mobile phone again. Once paired and connected, the headset will be automatically connected to your phone whenever you turn the headset on again.

7. Connection/Link between Headset and Mobile Phone

After the pairing is completed, the headset is always under standby mode. Before you place or answer a call, if the headset icon is not shown on the phone screen, please follow the steps below to activate the Bluetooth connection/link through your mobile phone or headset until the pairing headset icon is on the screen.

- A. **On the phone:** Select the **BT Headset** from the paired list on your phone screen.
- B. **On the headset:** Turn on the headset again, and the headset will connect the last paired device automatically.

8. Disconnection between Headset and Mobile Phone

When you need to connect your headset with another Bluetooth-enabled mobile phone, please follow the steps below to disconnect the headset with the pre-paired mobile phone.

- A. Power off the Headset.
- B. Select **DISCONNECTING** on the Bluetooth device list of your mobile phone to remove the connection.

Note: When losing the connection/link, the headset will automatically power off in 10 minutes.

9. Using the Headset

- A. **Answering Calls**
When receiving a phone call, press the **MFB** button once to answer a call.
- B. **Ending Calls**
Press the **MFB** button once to end a call.

10. Restore the Factory Default Settings

To restore your headset to its factory default setting, press and hold the **V+** or **V-** button for 10 seconds until both blue and red LED flash alternately. Then press the **MFB** button for 3 seconds to power off the headset to complete the setting.

11. Care and Maintenance

- A. Consider turning your headset off before placing it in your pocket or bag. If the **MFB** is accidentally depressed, your mobile handset may place an unintended call.
- B. Do not expose the headset to liquid, moisture or humidity, as it is not waterproof.
- C. Do not use abrasive cleaning solvents to clean the headset.
- D. Do not place the headset in high temperature, as it will result in an explosion.
- E. Keep headset away from sharp objects to prevent scratching or damaging the device.
- F. Do not stick anything inside the headset as this may damage internal components.
- G. Do not attempt to disassemble the headset, as it does not contain serviceable components.

14. Safety Information

- A. Check local laws regarding the use of a mobile handset and headset while driving. If you use the headset while driving, be sure to focus on safe driving practices.
- B. Never allow children to play with the headset. Small parts may be a choking hazard.
- C. Observe all signs that require an electrical device or RF radio product to be switched off in the designated areas. These could include hospitals, blasting areas and potentially explosive atmospheres.
- D. Turn off your headset prior to boarding an aircraft. Do not use your headset in an aircraft.
- E. Never mount or store your headset over any air bag deployment area. Serious injury may result when an air bag deploys.
- F. Do not open or damage the built-in battery.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference; and (2) This device must accept any interference received, including interference that may cause undesired operation.