1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616

Fax: +86 (0) 21 5450 0954

Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 1 of 39

Tino_Pan@sgs.com

FCC TEST REPORT(DOC)

Application No.: SHEMO060600005IT **Applicant**: T&A Mobile Phones

Equipment Under Test (EUT):

NOTE: The following sample(s) submitted was/were identified on behalf of the client as

EUT Name: GSM Mobile Phone

Model No.: C64a

Marketing Name: OT-E801a

Item No.: Not supplied by client Serial No.: Not supplied by client CFR 47 part 2: 2004,

CFR 47 Part 15: 2005,

ANSI C63.4: 2003

Date of Receipt: 5 June 2006

Date of Test: 10 June 2006 to 29 June 2006

Date of Issue: 30 June 2006

Test Result: PASS

Authorized Signature:

Tino Pan E&E Section Head

SGS-CSTC Co., Ltd.

FC

Jacky Cao E&E Project Engineer

SGS-CSTC Co., Ltd

Jarky Cas

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the SGS PRODUCT CERTIFICATION MARK.. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

All test results in this report can be traceable to National or International Standards.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954
Tino_Pan@sgs.com
Page 2 of 39

2 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result	
Radiated Emission	CFR 47 Part 15	ANSI C63.4: 2003	Class B	PASS	
30MHz-1000MHz	CFR 4/ Part 15	ANSI C03.4: 2003	Class B	PASS	
Conducted Emission	CFR 47 Part 15	ANGLO62 4, 2002	Class D	DAGG	
150KHz-30MHz	CFR 4/ Part 15	ANSI C63.4: 2003	Class B	PASS	

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616

Fax: +86 (0) 21 5450 0954

Tino_Pan@sgs.com

Report No.: SHEMO060600005IT

Page 3 of 39

3 Contents

1	CO	OVER PAGE	Page 1
2		ST SUMMARY	
3		ONTENTS	
4	GE	ENERAL INFORMATION	4
	4.2 C 4.3 I 4.4 I 4.5 S 4.6 I 4.6 I 4.7 A 4.8 M 4.9 I	CLIENT INFORMATION GENERAL DESCRIPTION OF E.U.T. DETAILS OF E.U.T. DESCRIPTION OF SUPPORT UNITS STANDARDS APPLICABLE FOR TESTING. TEST LOCATION. DEVIATION FROM STANDARDS ABNORMALITIES FROM STANDARD CONDITIONS MONITORING OF EUT FOR ALL IMMUNITY TEST TEST CONFIDENT LEVEL DUIPMENTS USED DURING TEST	
6	EM	IISSION TEST RESULTS	8
	6.1. 6.1. 6.1.	.2 Test setup:	
7	PH	OTOGRAPHS	36
,	7.2	RADIATED EMISSION TEST SETUP	36

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 4 of 39

Tino_Pan@sgs.com

4 General Information

4.1 Client Information

Applicant: T&A Mobile Phones

Address of Applicant: 3/F, B2 Block, Digital Technology Yard, Gaoxin Nan Qi Road,

Nan Shan District, Shenzhen, Guangdong, P.R.China

4.2 General Description of E.U.T.

EUT Name: GSM Mobile Phone

Model No.: C64a

Marketing Name: OT-E801a

Brand Name Not supplied by client Serial No.: Not supplied by client

4.3 Details of E.U.T.

Power Supply01: AC to DC charger (Model NO: 3DS11022AAAA

Input:100-240 Vac, 50/60 Hz, 0.15 A, Class II;

Output: 5.0 VDC, 0.5 A)

Manufactures: Leader

Power Cord01: 2.0m

Power Supply02: AC to DC charger (Model NO: 3DS11022ABAA

Input :100-240 Vac, 50/60 Hz, 0.15 A, Class II;

Output: 5.0 VDC, 0.5 A)

Manufactures: Leader

Power Cord02: 2.0m

Power Supply03: AC to DC charger (Model NO: 3DS11022AGAA

Input:100-240 Vac, 50/60 Hz, 0.15 A, Class II;

Output: 5.0 VDC, 0.5 A)

Manufactures: Leader

Power Cord03: 2.0m

Power Supply04: AC to DC charger (Model NO: 3DS11022AHAA

Input:100-240 Vac, 50/60 Hz, 0.15 A, Class II;

Output: 5.0 VDC, 0.5 A)

Manufactures: Leader

Power Cord04: 2.0m

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 5 of 39

Tino_Pan@sgs.com

Cigar lighter charger DC charger (Model NO:3DS11023 AAAA

Input: 12 - 24VDC, 0,3 A)

Data cable Model NO: T5000200AAAA

Manufacturers: Quancheng

Headset Model NO: T5000324AAAA

Manufacturers: Quancheng

Battery DC 3.7V / 650mAh

modle: 3DS11080AAAA

Manufacturers: BYD

4.4 Description of Support Units

Name / Function	Model No	Remark
N/A	N/A	N/A

4.5 Standards Applicable for Testing

The customer requested EMC tests for a GSM Mobile Phone.

The standards used was CFR 47 part 2: 2004 and CFR 47 part 15: 2005:

Table 1: Tests Carried Out Under CFR 47 Part 15: 2005:

	Standard	Status
FCC Part 15 Subpart B: 2005	Radiated Emission	$\sqrt{}$
FCC Part 15 Subpart B: 2005	Conducted Emission	$\sqrt{}$

X Indicates that the test is not applicable
 √ Indicates that the test is applicable

4.6 Test Location

Radiated Emission was performed at:

SIMT EMC Laboratory, 1/F, Building No.1, Agriculture Machinery Materials Company

No.716 Yi shan Road, Shanghai, P.R.China.

Tel: +86 21 64701390 Fax: +86 21 64514252

Conducted Emission was performed at SGS E&E EMC lab

SGS-CSTC EMC Laboratory, No.889 Yishan Road, Shanghai, P.R.China

Tel:+86 21 61402666 Fax: +86 21 54500954

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 6 of 39

Tino_Pan@sgs.com

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Monitoring of EUT for All Immunity Test

N/A

4.9 Test Confident level

Test Confident level is recognized, certified, or accredited by the following organizations:

NVLAP - Lab Code: 200632-0

SIMT EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200632-0. Effective through December 31, 2004.

VCC

The 10m Semi-anechoic chamber and Shielded Room of SIMT have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: 1153. Date of Registration:May 29, 2004. Valid until May 18, 2007

CNAL - LAB Code: L0134

SIMT EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.

FCC - Registration No.: 142171

SIMT EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 142171, Dcember 9, 2002. With the above and NVLAP, SIMT is an authorized test laboratory for the DoC process.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT Fax: +86 (0) 21 5450 0954 Page 7 of 30

Fax: +86 (0) 21 5450 0954 Tino_Pan@sgs.com Page 7 of 39

5 Equipments Used during Test

	Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	HORN ANTENNA	R&S	HF 906	100023	2006-06-17	2007-06-16
2	BROADBAND ANTENNA	R&S	HL 562	100019	2006-06-17	2007-06-16
3	EMI TEST RECEIVER	R&S	ESI 26	838786/011	2006-03-06	2007-03-05
4	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU 200	100536	2006-01-25	2007-01-24

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
Item	Test Equipment	Manufacturer Model No.		Seriai No.	(dd-mm-yy)	(dd-mm-yy)
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2005-6-29	2006-6-28
2	Line impedance stabilization network	ETS	3816/2	00034161	2005-6-29	2006-6-28

General Equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	Temperature, Humidity & Barometer	Oregon Scientific	BA-888	EMC0001 to EMC0004	2005-07-25	2006-07-24
2	DMM	Fluke	73	70681569 or 70671122	2005-07-23	2006-07-22

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 8 of 39

Tino_Pan@sgs.com

6 Emission Test Results

6.1 Radiated Emissions, 30MHz to 1GHz

Test Requirement: CFR 47 Part 15

Test Method: ANSI C63.4, CISPR 22

Test Date: June 29, 2006 Frequency Range: 30MHz to 1GHz

Measurement Distance: 3m for ANSI C63.4 and 10m for CISPR 22

Class: N/A

Detector: Peak for pre-scan (120kHz resolution bandwidth)

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 25.0°C Humidity: 55 % RH Atmospheric Pressure: 1004 mbar

EUT Operation: EUT allocated channel mode GSM850&PCS 1900 with charger and data cable.

And we just choose the worst case for the report

6.1.2 Test setup:

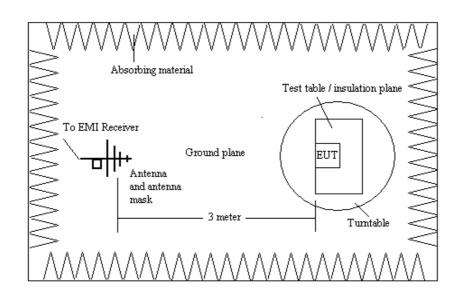

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT


Fax: +86 (0) 21 5450 0954
Tino_Pan@sgs.com
Page 9 of 39

6.1.3 Test Result:

GSM850 dedicated: (test with the adapter of power supply 01)

Horizental:

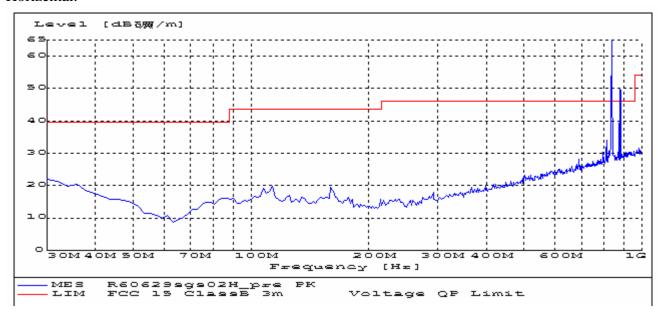

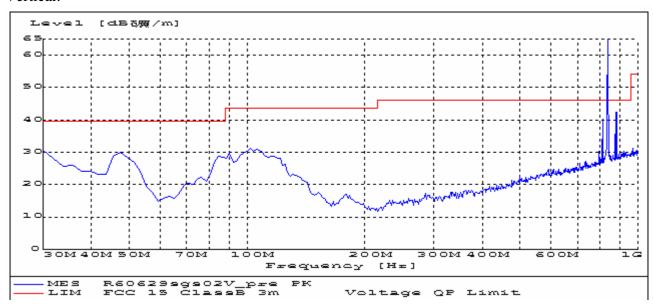


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Tino_Pan@sgs.com Page 10 of 39

GSM1900 dedicated: (test with the adapter of power supply 01)

Horizental:

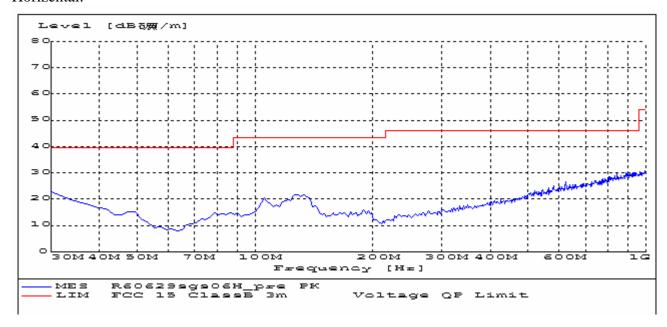

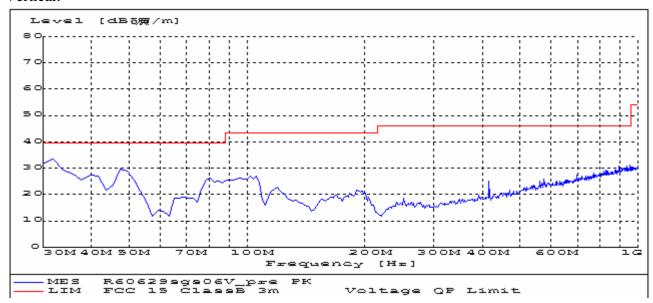


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954
Tino_Pan@sgs.com
Page 11 of 39

GSM850 dedicated: (test with the adapter of power supply 02)

Horizontal:

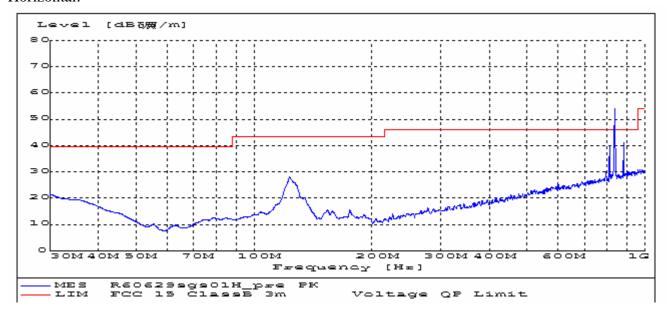

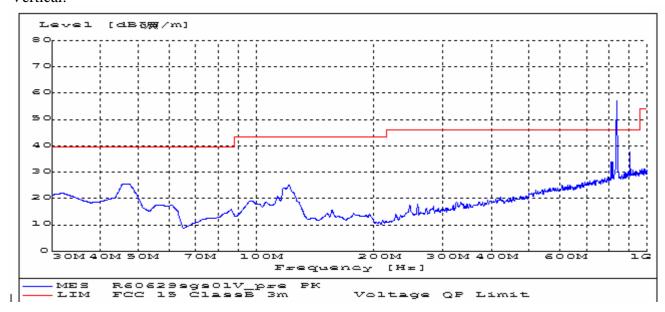



1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954
Tino_Pan@sgs.com
Page 12 of 39

GSM1900 dedicated: (test with the adapter of power supply 02)

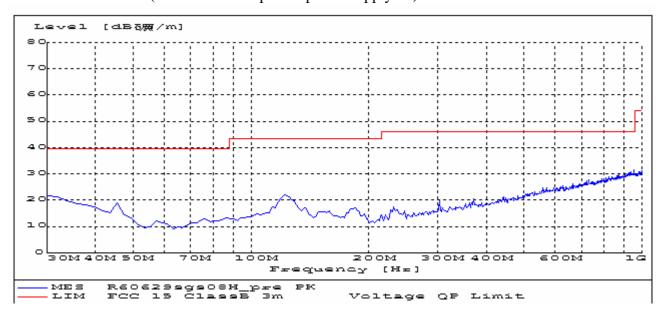

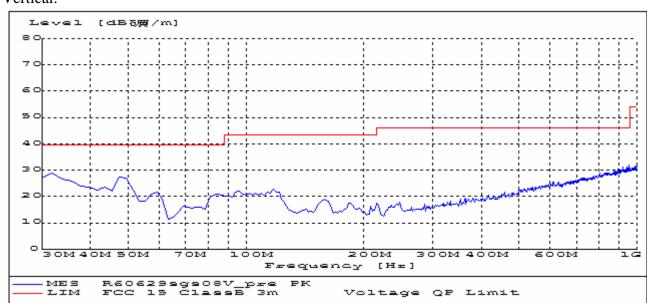


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954
Tino_Pan@sgs.com
Page 13 of 39

GSM850 dedicated: (test with the adapter of power supply 03)

Horizontal:

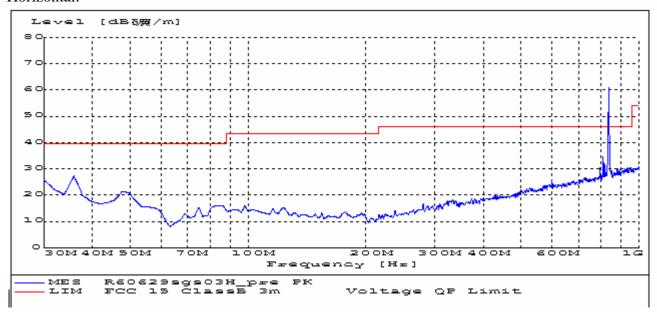

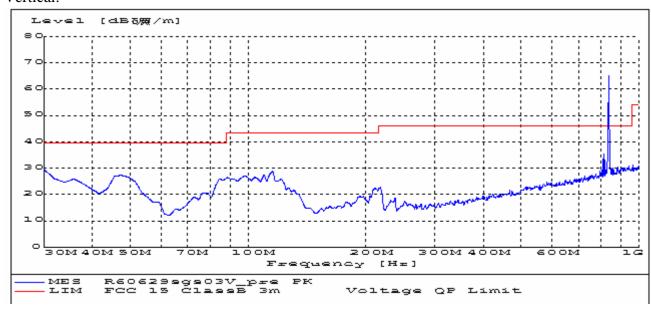



1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954
Tino_Pan@sgs.com
Page 14 of 39

GSM1900 dedicated: (test with the adapter of power supply 03)

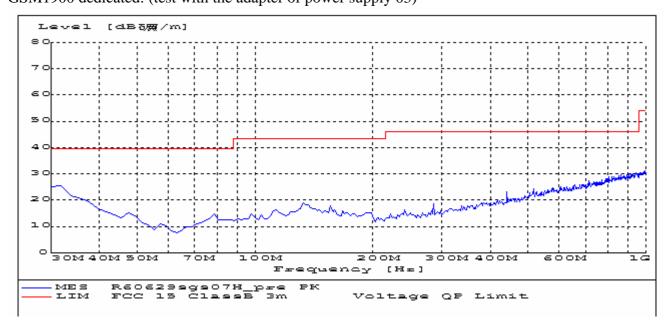

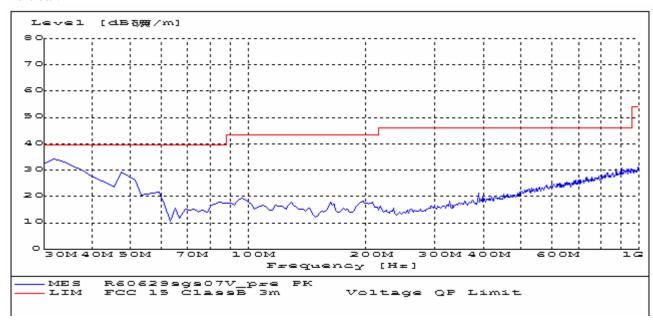

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


+86 (0) 21 6495 1616 Report No.: SHEMO060600005IT Telephone: Fax:


+86 (0) 21 5450 0954 15 of 39 Page

GSM850 dedicated: (test with the adapter of power supply 04)

Horizontal:

Tino_Pan@sgs.com

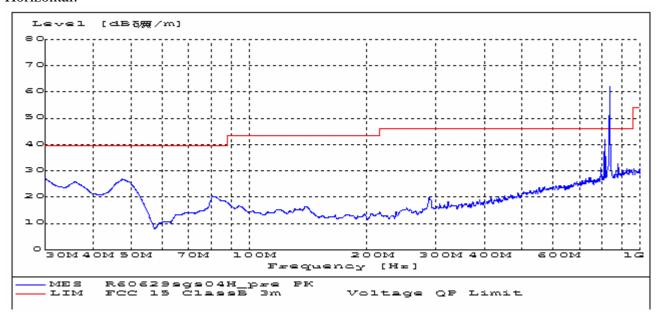

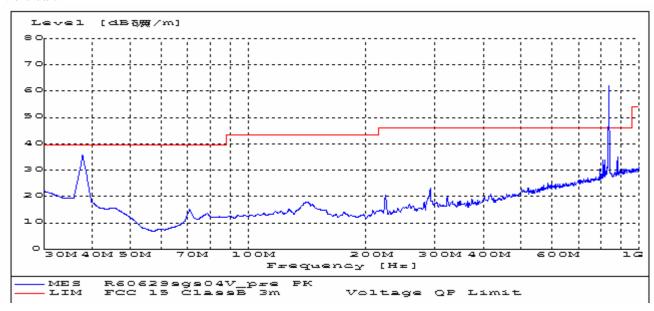



1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Tino_Pan@sgs.com Page 16 of 39

GSM1900 dedicated: (test with the adapter of power supply 04)

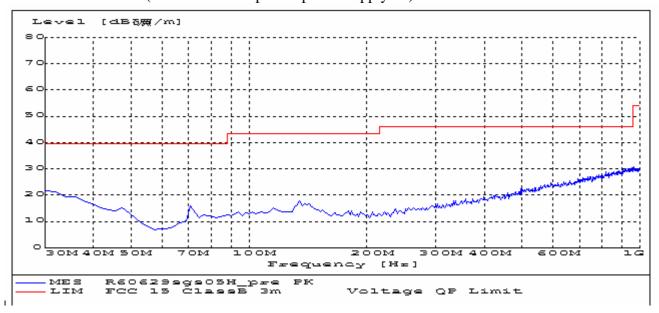

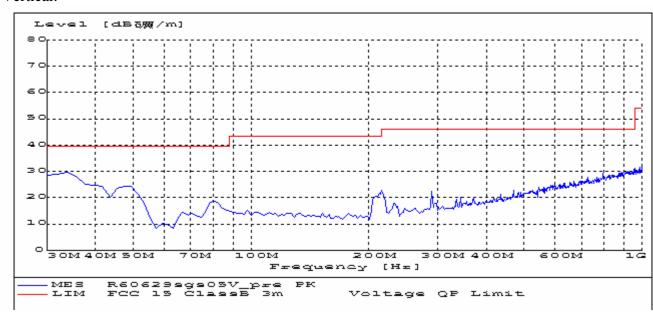

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT


Fax: +86 (0) 21 5450 0954 Page 17 of 39

Tino_Pan@sgs.com

GSM850 dedicated: (test with the Cigar lighter charger)

Horizontal:

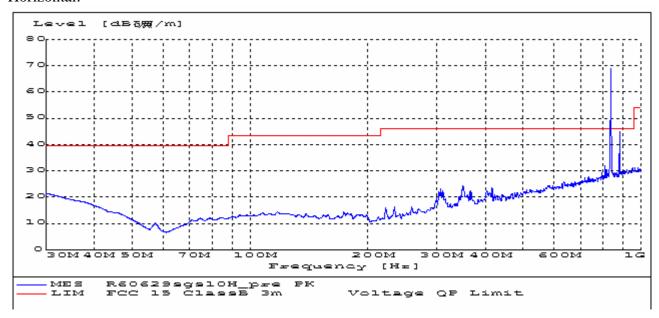

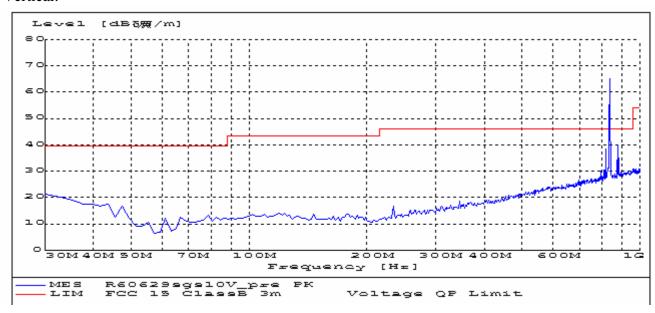



1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954
Tino_Pan@sgs.com
Page 18 of 39

GSM1900 dedicated: (test with the Cigar lighter charger)

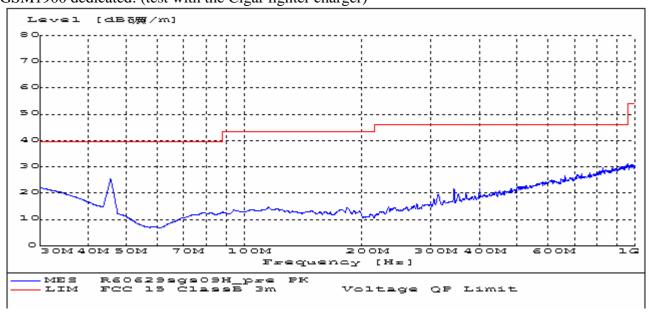

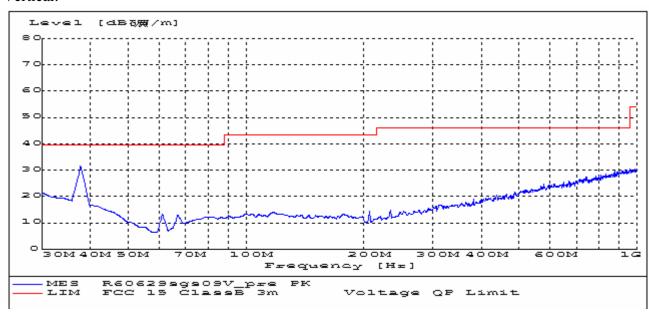

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 19 of 39

Tino_Pan@sgs.com

6.2 Conducted Emissions, 150kHz to 30MHz

Test Requirement: CFR 47 part 15
Test Method: ANSI C63.4
Test Date: 20 June 2006

Frequency Range: 150kHz to 30MHz

Class: N/A

Limit: 66 dBµV - 56 dBµVbetween 150kHz & 500kHz Quasi-peak

 $56 \text{ dB}\mu\text{V}$ between 0.5MHz & 5MHz Quasi-peak $60 \text{ dB}\mu\text{V}$ between 5MHz & 30MHz Quasi-peak

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0°C Humidity: 58% RH Atmospheric Pressure:

EUT Operation: EUT allocated channel mode GSM850&PCS 1900 with charger and data

cable. And we just choose the worst case for the report

6.2.2 Test Result and Partial Measurement Data

Pass

An initial pre-scan was performed in the Shielding room using the receiver in peak detection mode. The EUT was measured for 2 orthogonal polarities and peak emissions from the EUT were detected within 6dB of the class B limit line.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:


Page 20 of 39

Tino_Pan@sgs.com

Power Supply1:

GSM 850 dedicated, charging with adaptor:

L Line:

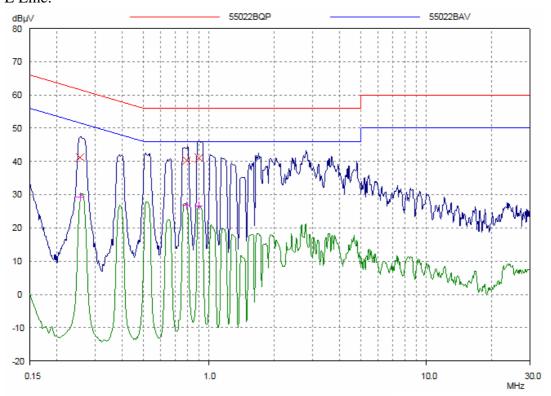

Frequency	QP Level	QP Limit	QP Delta
MHz	dBμV	dBμ√	dB
0.25582	41.16	61.57	20.41
0.78683	40.30	56.00	15.70
0.90097	40.94	56.00	15.06
Frequency	AV Level	AV Limit	AV Delta
MHz	dBμV	dΒμV	dB
0.25582	29.27	51.57	22.30
0.78683	26.71	46.00	19.29
0.90097	26.67	46.00	19.33


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:

Page 21 of 39

Tino_Pan@sgs.com

N Line:

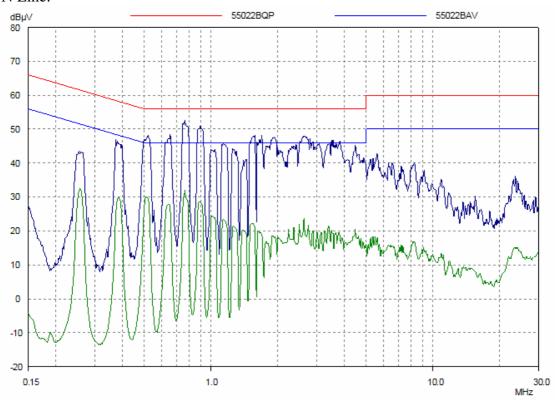

Frequency	Receiver QP Level	Limit	Margin	Receiver AV Level	Limit	Margin
(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)
0.15	*	66	*	*	56	*
0.24	*	63.43	*	*	53.44	*
0.543	*	56	*	*	46	*
5.00	*	56	*	*	46	*
10.00	*	60	*	*	50	*
22.00	*	60	*	*	50	*
30.00	*	60	*	*	50	*

[&]quot;*" means the emission level is 6dB lower than the relevant limit.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 22 of 39

 $Tino_Pan@sgs.com$

PCS 1900 dedicated, charging with adaptor:

L Line:

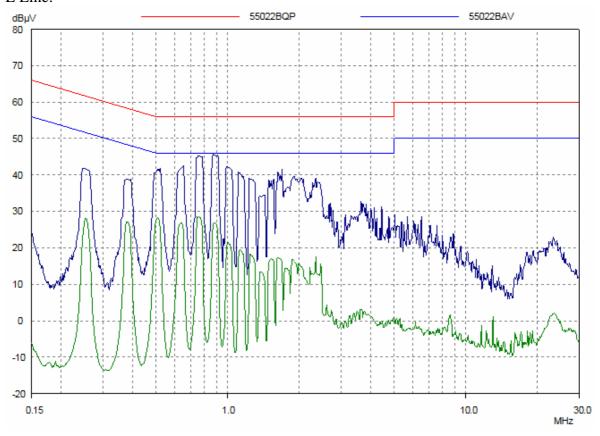

Frequency	Receiver QP Level	Limit	Margin	Receiver AV Level	Limit	Margin
(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)
0.15	*	66	*	*	56	*
0.24	*	63.43	*	*	53.44	*
0.543	*	56	*	*	46	*
5.00	*	56	*	*	46	*
10.00	*	60	*	*	50	*
22.00	*	60	*	*	50	*
30.00	*	60	*	*	50	*

[&]quot;*" means the emission level is 6dB lower than the relevant limit.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

+86 (0) 21 6495 1616 +86 (0) 21 5450 0954 Telephone: Report No.: SHEMO060600005IT Fax:

Page 23 of 39

Tino_Pan@sgs.com

N Line:

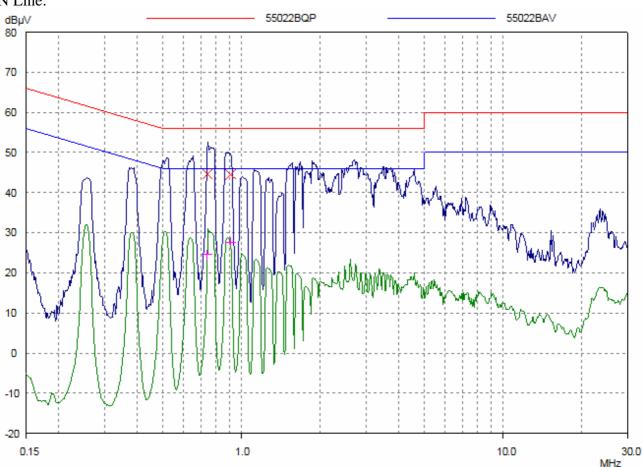

Frequency	QP Level	QP Limit	QP Delta
MHz	dBµV	dBµV	dB
0.73824	44.60	56.00	11.40
0.90817	44.55	56.00	11.45
Frequency	AV Level	ΑV Limit	AV Delta
MHz	dBμV	dBμV	dB
0.73824	24.58	46.00	21.42
0.90817	27.66	46.00	18.34

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:


Page 24 of 39

Tino_Pan@sgs.com

Power Supply 2:

GSM 850 dedicated, charging with adaptor:

L Line:

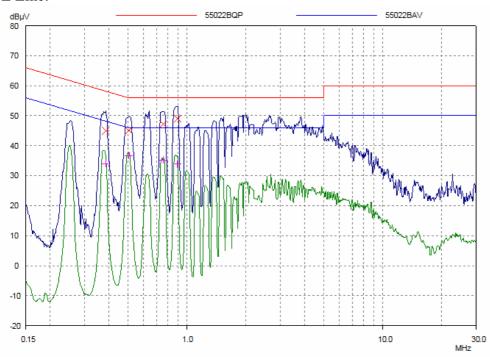

Frequency	QP Level	QP Limit	QP Delta
MHz	dBµ∀	dBμV	dB
0.38409	44.94	58.19	13.25
0.5036	45.03	56.00	10.97
0.7561	47.24	56.00	8.76
0.89382	48.92	56.00	7.08
Frequency	A∀ Level	AV Limit	AV Delta
MHz	dBμ∀	dΒμV	dB
0.38409	33.87	48.19	14.32
0.5036	36.61	46.00	9.39
0.7561	35.08	46.00	10.92
0.89382	33.84	46.00	12.16


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

+86 (0) 21 6495 1616 +86 (0) 21 5450 0954 Telephone: Report No.: SHEMO060600005IT Fax:

25 of 39 Page

Tino_Pan@sgs.com

N line:

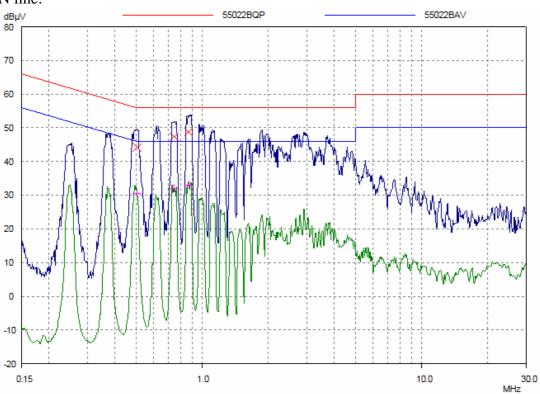

Final Measurement Results						
Frequency MHz	QP Level dBμV	QP Limit dBμ√	QP Delta dB			
0.5036	44.16	56.00	11.84			
0.74414	47.27	56.00	8.73			
0.86578	48.66	56.00	7.34			
Frequency	AV Level	AV Limit	AV Delta			
MHz	dBµ∨	dBµV	dB			
0.5036	30.59	46.00	15.41			
0.74414	31.96	46.00	14.04			
0.86578	32.93	46.00	13.07			

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


+86 (0) 21 6495 1616 +86 (0) 21 5450 0954 Telephone: Report No.: SHEMO060600005IT

Fax: 26 of 39 Page

Tino_Pan@sgs.com

PCS 1900 dedicated, charging with adaptor:

L Line:

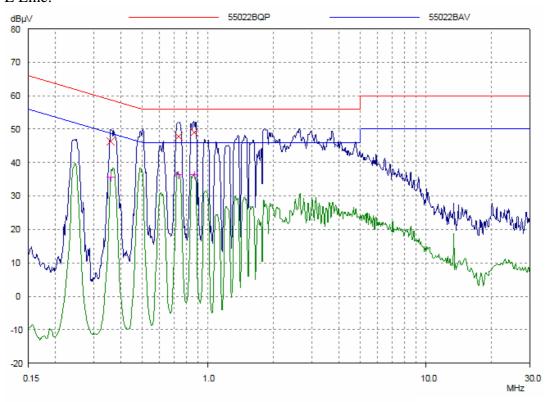

Frequency	QP Level	QP Limit	QP Delta
MHz	dBµV	dBμV	dB
0.35751	46.38	58.79	12.41
0.73238	47.82	56.00	8.18
0.86578	48.92	56.00	7.08
Frequency	AV Level	A∀ Limit	AV Delta
MHz	dBμV	dBμ∀	dB
0.35751	35.63	48.79	13.16
0.73238	36.24	46.00	9.76
0.86578	36.34	46.00	9.66


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT Fax:

+86 (0) 21 5450 0954 Page 27 of 39

Tino_Pan@sgs.com

N Line:

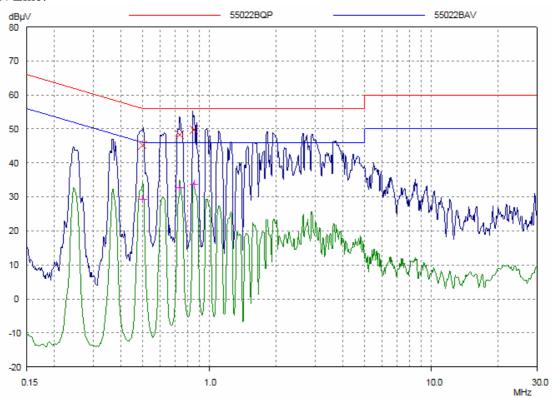

Frequency	QP Level	QP Limit	QP Delta	
MHz	dBµV	dBµ∨	dB	
0.49961	45.20	56.01	10.81	
0.73238	48.22	56.00	7.78	
0.85209	49.65	56.00	6.35	
Frequency	AV Level	AV Limit	AV Delta	
MHz	dBµ∨	dBμV	dB	
0.49961	29.25	46.01	16.76	
0.73238	32.68	46.00	13.32	
0.85209	33.69	46.00	12.31	

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT


Fax: +86 (0) 21 5450 0954 Page 28 of 39

Tino_Pan@sgs.com

Power supply 03

GSM850 dedicated, charging with adaptor:

L line:

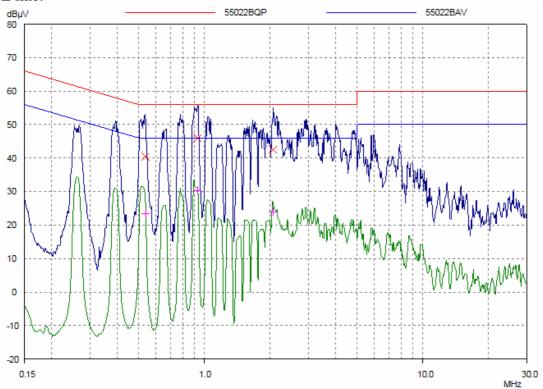

Frequency	QP Level	QP Limit	QP Delta
MHz	dBµV	dBµV	dB
0.53675	40.32	56.00	15.68
0.93015	45.87	56.00	10.13
2.0635	42.50	56.00	13.50
Frequency	AV Level	AV Limit	AV Delta
MHz	dBμV	dΒμV	dB
0.53675	23.30	46.00	22.70
0.93015	30.23	46.00	15.77
2.0635	23.96	46.00	22.04


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

+86 (0) 21 5450 0954 Fax: 29 of 39 Page

Tino_Pan@sgs.com

N line: dBµ∨

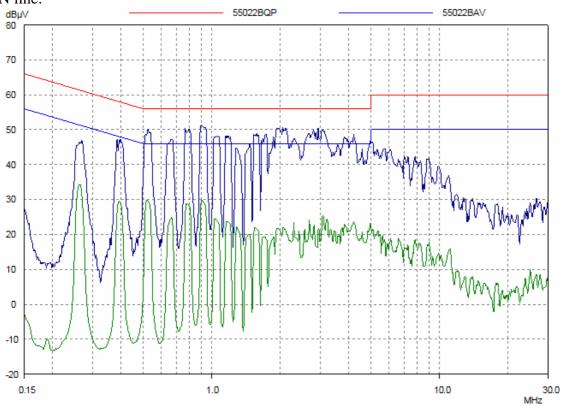

Frequency	Receiver QP Level	Limit	Margin	Receiver AV Level	Limit	Margin
(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)
0.15	*	66	*	*	56	*
0.24	*	63.43	*	*	53.44	*
0.543	*	56	*	*	46	*
5.00	*	56	*	*	46	*
10.00	*	60	*	*	50	*
22.00	*	60	*	*	50	*
30.00	*	60	*	*	50	*

[&]quot;*" means the emission level is 6dB lower than the relevant limit.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 30 of 39

Tino_Pan@sgs.com

PCS1900 dedicated, charging with adaptor:

L line:

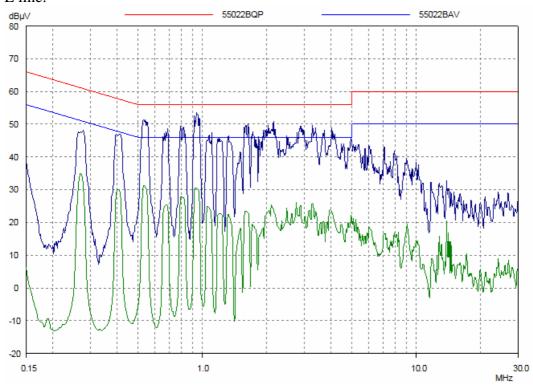

Frequency	Receiver QP Level	Limit	Margin	Receiver AV Level	Limit	Margin
(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)
0.15	*	66	*	*	56	*
0.24	*	63.43	*	*	53.44	*
0.543	*	56	*	*	46	*
5.00	*	56	*	*	46	*
10.00	*	60	*	*	50	*
22.00	*	60	*	*	50	*
30.00	*	60	*	*	50	*

[&]quot;*" means the emission level is 6dB lower than the relevant limit.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT Fax:

+86 (0) 21 5450 0954 Page 31 of 39

Tino_Pan@sgs.com

N line:

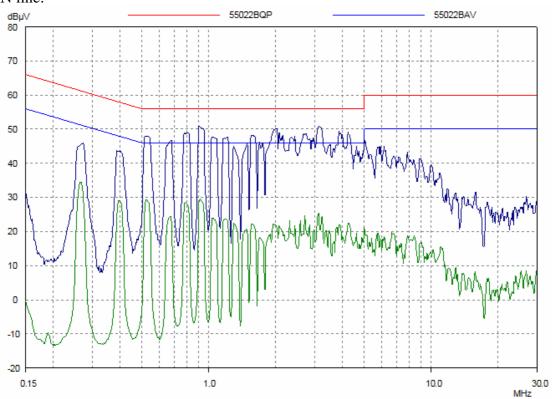

Frequency	Receiver QP Level	Limit	Margin	Receiver AV Level	Limit	Margin
(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)
0.15	*	66	*	*	56	*
0.24	*	63.43	*	*	53.44	*
0.543	*	56	*	*	46	*
5.00	*	56	*	*	46	*
10.00	*	60	*	*	50	*
22.00	*	60	*	*	50	*
30.00	*	60	*	*	50	*

[&]quot;" means the emission level is 6dB lower than the relevant limit.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT


Fax: +86 (0) 21 5450 0954 Page 32 of 39

Tino_Pan@sgs.com

Power supply 04

GSM850 dedicated, charging with adaptor:

L line:

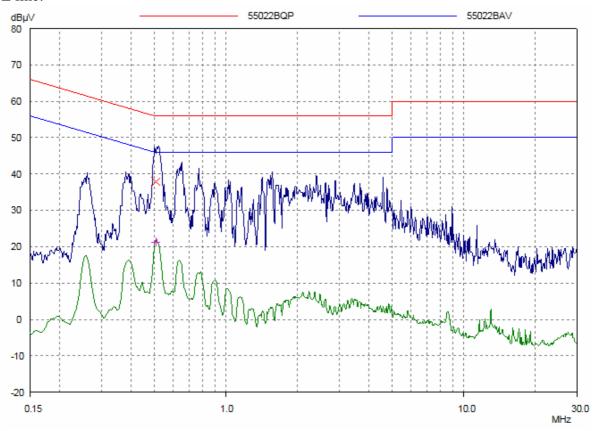

Final Measurement Results						
Frequency MHz	QP Level dBµV	QP Limit dBµ√	QP Delta dB			
0.50763	37.85	56.00	18.15			
Frequency MHz	A√ Level dBμ√	AV Limit dΒμV	AV Delta dB			
0.50763	21.19	46.00	24.81			


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:

33 of 39 Page

Tino_Pan@sgs.com

N line:

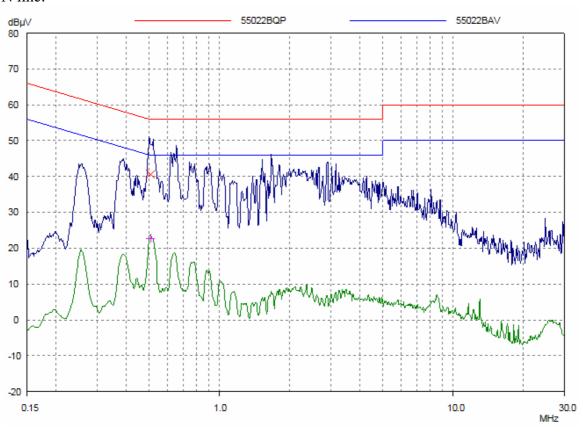

Final Measurement Results						
Frequency MHz	QP Level dBμV	QP Limit dBµV	QP Delta dB			
0.50763	40.62	56.00	15.38			
Frequency MHz	AV Level dBμV	A∀ Limit dBµ∀	AV Delta dB			
0.50763	22.73	46.00	23.27			

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT

Fax: +86 (0) 21 5450 0954 Page 34 of 39

 $Tino_Pan@sgs.com$

PCS1900 dedicated, charging with adaptor:

L line:

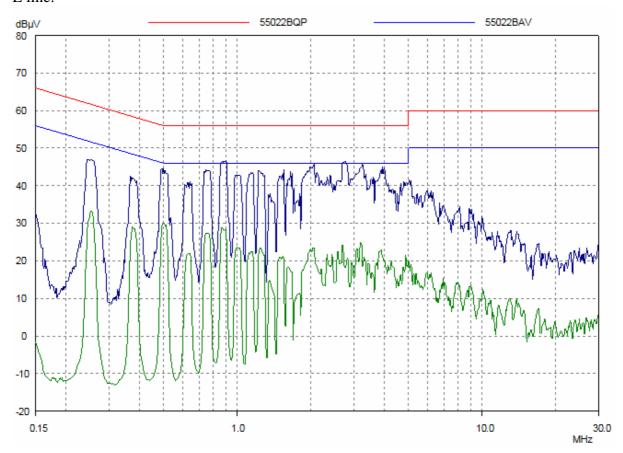

Frequency	Receiver QP Level	Limit	Margin	Receiver AV Level	Limit	Margin
(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)
0.15	*	66	*	*	56	*
0.24	*	63.43	*	*	53.44	*
0.543	*	56	*	*	46	*
5.00	*	56	*	*	46	*
10.00	*	60	*	*	50	*
22.00	*	60	*	*	50	*
30.00	*	60	*	*	50	*


[&]quot;*" means the emission level is 6dB lower than the relevant limit.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:

Page 35 of 39

Tino_Pan@sgs.com

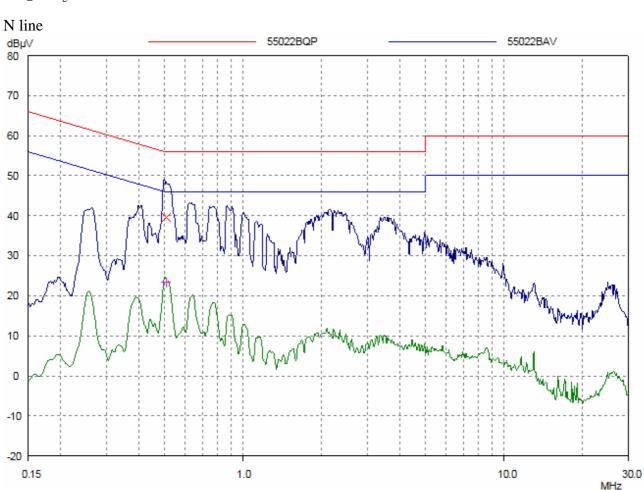

Final Measurement Results						
Frequency MHz	QP Level dBμV	QP Limit dBµV	QP Delta dB			
0.50763	39.59	56.00	16.41			
Frequency MHz	AV Level dBμV	AV Limit dΒμV	AV Delta dB			
0.50763	23.22	46.00	22.78			

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:

Page 36 of 39


Tino_Pan@sgs.com

Photographs 7

7.1 Radiated Emission Test Setup



7.2 Conducted Emission Test Setup

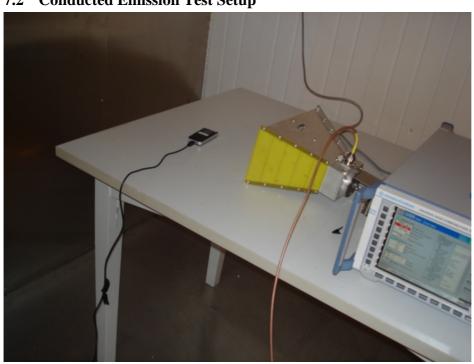

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:

37 of 39 Page

Tino_Pan@sgs.com

7.3 **EUT Constructional Details**





1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

+86 (0) 21 6495 1616 +86 (0) 21 5450 0954 Telephone: Report No.: SHEMO060600005IT Fax:

38 of 39 Page

Tino_Pan@sgs.com





1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889, Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616 Report No.: SHEMO060600005IT +86 (0) 21 5450 0954 Fax:

Page 39 of 39

Tino_Pan@sgs.com





THE END OF REPORT