



55 mm

80 mm



**QCY**


QCY-T4  
Mini TWS Bluetooth Earbuds




Instruction Video

**Overview**

**Choose Your Eartips**  
Please try medium eartips first as they fit most people.



L M S

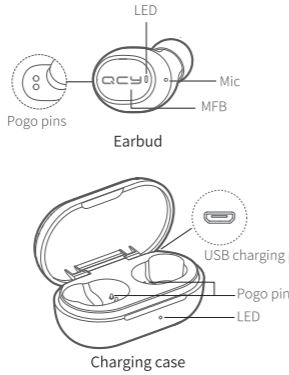


Earbud

Charging case

**How to Pair**


**First Time Pairing:**  
1. Pick up both earbuds, pop both earbuds into the case to activate them.  
2. Pick up both earbuds again.  
3. On cellphone, search for QCY-T4 and tap to connect.  
\*Once paired earbuds will auto power on upon picking up from the case. If earbuds fail to auto power on, please charge them and try again.

**Switch Paired Device:**  
1. Turn off phoneA's Bluetooth faculty and earbuds will auto disconnect and enter into pairing mode.  
2. On phoneB, search for QCY-T4 and tap to connect.  
\*Multi-point connection is not available. Earbuds will auto reconnect to phoneB upon powering up again.




**Factory Setting**

(Try the following steps to fix connectivity issue)  
**Set to factory:**  
1. On cellphone, search for QCY-T4, tap and choose ignore or cancel pairing.  
2. Pick up two earbuds, keep touching both bars for 8s or until LEDs blink red and green 3 times to power off.  
3. Keep touching both bars for 10s or until LEDs blink red and green 3 times then blink red to set earbuds to factory.  
\*Please refer "First Time Pairing" to connect after factory setting. Manual Pairing (please refer the following steps in case two earbuds lose connection)  
Power off earbuds then keep touching panels for 5s or until LEDs blink red and green. After then, double touch panels and LEDs will blink red and green. Two earbuds will then auto pair with each other when left LED blinks red and green and the other one turns off.



**How to Wear**



1. Rotate earbud and pop it into your ear then shake head to check wearing stability.
2. Please adjust mic towards your mouth to gain better calling experience.

**Three-way Calling & Swith**  
Press MFB to answer incoming call. If another call is coming in sync, press MFB to put the first call on hold while activating the second call or hold MFB to ignore the second call. Double press MFB to switch between held call and active call.

**Mono Mode**

1. Power off earbuds, keep touching either panel for 5s to enter pairing mode (LED blinks red and green).
2. On cellphone, search for QCY-T4 and tap to connect.
3. Connected.

**Charging Earbud**  
Push earbuds into case and earbuds will auto be charged. LEDs will glow solid red when charging and turn green for 1 minute once topped up.

**Charging the Case**  
Charge the case via USB cable.  
LED:  
Battery level ≤60%: solid red  
Battery level 60%-95%: solid green  
Battery level ≥95%: solid white

**Parameter**  
Bluetooth version: V5.0      Standby time: approx. 70hr  
Charging time: approx. 2hr      Music time: approx. 4.5hr  
Operation range: 10m(with no obstacle)  
Talk time: approx. 4hr  
Battery type: li-ion  
Battery capacity(earbud): 3.7V 43mAh  
Battery capacity(case): 3.7V 380mAh  
Input parameter(case): 5V 300mA  
Bluetooth profiles: HSP/HFP/A2DP/AVRCP

**Function Introduction**

| Functions                  | Current status          | Operation/result   | LED                              | Prompt |
|----------------------------|-------------------------|--|----------------------------------|--------|
| Power-on                   | Power-off               | Hold MFB for 1s  | LED glows green for 1s           | TONE   |
|                            | Charging                | Pick up earbuds from case  | LED glows green for 1s           | TONE   |
| Power-off                  | Power-on                | Hold MFB for 3s (two earbuds will power off together in case they are not connected to device) | LED glows red for 2s             | TONE   |
|                            |                         | Pull back into case  | LED glows solid red              | TONE   |
| Factory setting            | Power-off               | Hold MFB for 10s   | LED blinks red and green 3 times | TONE   |
| Answer/end call            | Incoming call/calling   | Press MFB  | \                                | TONE   |
| Ignore call                | Incoming call           | Hold MFB for 1s  | \                                | TONE   |
| Voice assistant            | Connected               | Hold MFB for 1s  | \                                | TONE   |
| Mute on/off                | Calling                 | Double press MFB   | \                                | TONE   |
| Music pause/resume playing | Playing                 | Press MFB  | \                                | \      |
| Skip track                 | Playing                 | Double press MFB on right/left earbud to skip track forward/backward                           | \                                | \      |
| Switch call to earbud      | Call handled by phone   | Hold MFB for 1s  | \                                | TONE   |
| Switch call to phone       | Call handled by earbuds | Hold MFB for 1s  | \                                | TONE   |

**Warranty Card**

Warranty Period  
12 months after you purchase this item.(or you may inquire your local shopper for more details.)  
Free Service:  
Supposing any defects caused by quality issues occur within the warranty period, please take this warranty card and purchase receipts to your distributor for free exchange service.

|                     |
|---------------------|
| Model Number:       |
| Date of Purchasing: |
| User's Name:        |
| User's Phone:       |
| User's Address:     |
| Shop's Name:        |
| Shop's Address:     |
| Comments:           |

Free exchange service will not be accessed under following circumstances:  
1. Damages caused unauthorized disassembly.  
2. Defects or physical damages caused by leaking or dropping off.  
3. Damages by act of God. Supposing your item is within any damages or defects except the above circumstances, please return to us or your distributor for free repairing.

**FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
- Reorient or relocate the receiving antenna.  
- Increase the separation between the equipment and receiver.  
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Hazardous substances and their contents in the item**

| Part Name      | Hazardous Substances |    |    |        |     |      |      |     |     |
|----------------|----------------------|----|----|--------|-----|------|------|-----|-----|
|                | Pb                   | Hg | Cd | Cr(VI) | PBB | PBDE | DEHP | DBP | BBP |
| Main body      | X                    | O  | O  | O      | O   | O    | O    | O   | O   |
| Battery        | O                    | O  | O  | O      | O   | O    | O    | O   | O   |
| Ear tips       | O                    | O  | O  | O      | O   | O    | O    | O   | O   |
| Accessories    | O                    | O  | O  | O      | O   | O    | O    | O   | O   |
| Charging cable | X                    | O  | O  | O      | O   | O    | O    | O   | O   |

This form is made by SJ/T 11364 regulation.  
O: means that hazardous substance content in the homogeneous materials of this part is within the limits of (EU) 2015/863 regulation.  
X: means that hazardous substance content in ,at least, one certain homogeneous material of this part is beyond the limits of (EU) 2015/863 regulation ,but there is no mature alternative in the industry at present, it still conforms to the EU ROHS Directive in the scope of exemption.

Notes: Please arrange using time properly as your hearing may be damaged by using the device for a long time.  
Manufacturer: Dongguan Hele Electronics Co., Ltd.  
Address: Daojiao Town, Dongguan City, Guangdong, China


**Tips**

1. Before using the headset, please read the manual carefully and keep it for future references.
2. The headset need to be fully charged prior to first-time use.
3. If the headset is left unused for over two weeks, please recharge it periodically.
4. Please use the chargers made by qualified manufacturer.
5. If the headset cannot be found by your phone, please check whether it is in pairing mode; if left unconnected for a long while, the headset will exit pairing mode, please re-enter the mode; if a procedure error of your phone occurs, reboot it; if a procedure error of the headset occurs, reboot or reset it.

**Caveats**

1. Never disassemble or modify your headset for any reasons to avoid any damages and danger.
2. Do not store the headset in extreme temperatures (under 0°C or over 45°C).
3. Avoid using the indicator close to the eyes of children or animals.
4. Do not use this headset during a thunderstorm to avoid irregular function and increased risk of electric shock.
5. Do not use harsh chemicals or strong detergents to clean the headset.
6. Keep the headset dry.

FCC ID: RDR-IN1948



330 mm