


QCY[®]

极
(智能蓝牙耳机)

Your Bluetooth

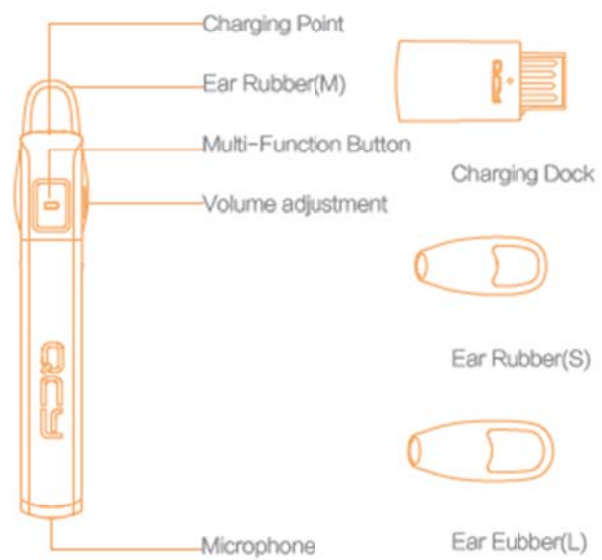

Specification



Model No.: J05
Noise Reduction: CVC Noise Reduction
Bluetooth Version: V4.0
Operation Range: 10 M
Talk Time: 5hrs
Charge Time: 2hrs
Standby Time: 180hrs
Size: 65×14×23mm
Support profiles: HFP, HSP, AVRCP, A2DP
Weight: 6.52g

Wear the Headset



Power On



Long press Multi-Function Button for 1 second(the white LED light on and Voice notify* Power on*)

Connecting



1.Power on the bluetooth headset and enter into the enter into the pairing mode.

When is first time time to pair with the bluetooth headset,it will deirectly enter into the pairing mode;

2. Turn on the bluetooth function on your mobile phone.

If this is not the firstly to be paired,long press the Multi-Function Button for 5 seconds under the mode of power off.

Enter into pairing mode(white LED flash quickly) .



3. Searching and choose the pairing name "J05" on the mobile for connecting

4. The password is 0000 if needed.It it succesfully connecting if the white LED of the the bluettoh headset is on for 2 seconds .

Note:If your mobile phone support safty simple pairing,there is no need to enter the

password.

Charge



1.

2.

Power On

Long press Multi-Function Button for 3 seconds to power off. (The white LED is on, and Voice notify " Power on").

Listen to Music

In the connecting mode, press Multi-Function Button once to play the music, and then press Multi-Function Button once to pause the music when playing music.

Volume Adjustment

When is playing or talking, press the Volume adjustment to volume up and down. (Loop to adjust the volume from up to down, down to up).

Skip the Music

Long press the Volume adjustment button for the next music.

Transfer the voice between

Long press the Multi-Function for

Refuse a Call

When there is a call, long press the Multi-Function Button for 1 second to refuse it.

Microphone Mute

In a call, press the Multi-Function Button twice quickly to activate the microphone mute. In the mute mode, press the Multi-Function Button twice quickly to activate microphone mute and to continue the call.


Redial

In the standby mode, to redial the

Receive/End

When there is a call (the white LED flash quickly), press the Multi-Function Button of the earphone to receive it, and then press the Multi-Function Button of the earphone to end it.

Connecting Two

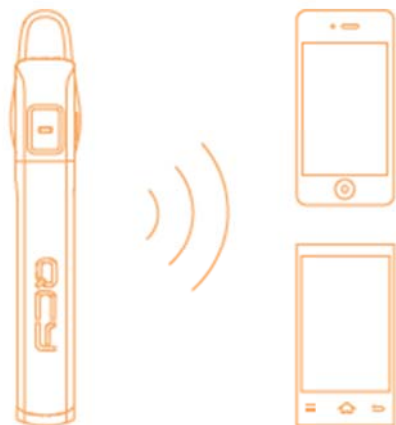

When the headset is connected to the first mobile, power off the headset, then press the Multi-Function Button for 5 seconds, the white LED flash quickly entering into searching mode. Then turn on the bluetooth function on the second mobile, searching the pairing name " J05 " of the headset for connecting. And then searching the pairing name " J05 " on first mobile for connecting. So it is connected with two mobiles.


When there is a call on first mobile, press Multi-Function Button once to receive the call.

When there is a call on the second mobile, double press Multi-Function Button quickly to hold on the call of the first mobile, and talk the call of the second mobile.

Transfer Calls Between Two Mobiles: Double press Multi-Function Button quickly to transfer the calls between two mobiles.

Default Settings

When it is charging, Press press the Volume Adjustment button and Multi-Function Button at the same time for 3 seconds to complete default settings (the white LED flash 3 times).

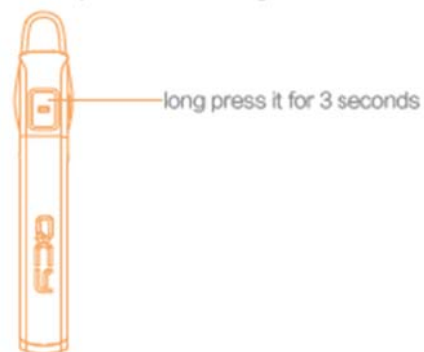

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.