


# Model Number: S3 Bluetooth Speaker Quick Start Guide

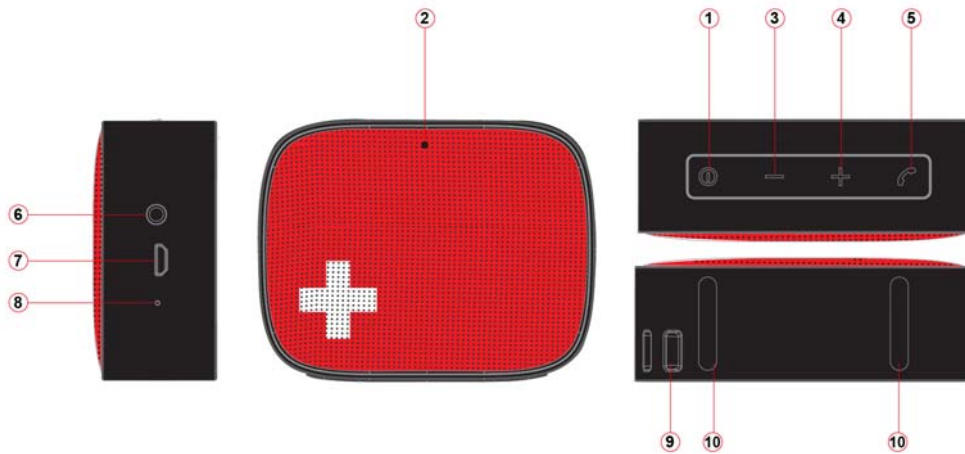

1	ⓘ Power on/off	6	Aux-in Hole
2	Mode / Charging LED indicator	7	Mini USB socket
3	— V— / Previous Song	8	Micro Hole
4	+ V+ / Next Song	9	Strap-Hook
5	⏸ Pause/Play/Hands-free	10	Foot Cushion

## Charging The Bluetooth Speaker

1. Connect the Bluetooth Speaker's Mini USB socket (7) with the Computer's USB port through USB cable.
2. The Charging LED (2) will turn ON in red light; the rechargeable battery is in charging.
3. The Charging LED (2) red light will turn OFF when the rechargeable battery is fully charged.

## Bluetooth Speaker Pairing / Reconnecting

1. Press and hold the button ⓘ (1) for 2 - 3 seconds, a tone sound will announce from speaker and the Mode LED (2) will blinking between blue and red, the device is turned ON and goes into reconnect / searching mode for pair depend on status;
2. Now, turn ON the Bluetooth function on your device, search for device name **"BLT-10"** and select it to pair.
3. If pairing is successful, a tone sound will announce from speaker and the Mode LED (2) light will switch to slow blink in blue (every 3 seconds once).
4. The Bluetooth Speaker will be reconnecting automatically if your mobile phone has been paired. (Depend on the mobile phone's type and configuration, manual reconnection may require on some devices)
5. Press and hold the ⓘ button (1) for 2 - 3 seconds, a tone sound will announce and Bluetooth speaker turned to OFF when you not use it.

**Note:** During in searching / pairing mode, the Bluetooth Speaker will power OFF automatically in 5 minutes if no device is connected and idle.

### Bluetooth Speaker Control Function

1. In playing music, press **⏸** button (5) to pause music, press it once again to play.
2. Pressing or press and hold the **+** button (4) to increases the volume level.
3. Pressing or press and hold the **-** button (3) to decreases the volume level.
4. When maximum or minimum volume is reached, a tone sound will be heard.
5. Press the **+** button (4) to play next music file.
6. Press the **-** button (3) to play previous music file.

### Hand Free Function

1. When there is an incoming call;
2. The ringing sound will up and the playing music will pause automatically.
3. Press **⏸** button (5) to pick up the call if you want.
4. Now you have hand free function with the Bluetooth speaker.
5. Press **⏸** button (5) again to hang up the call when finished.
6. The paused music will start to play automatically.

**Tip:** speak to the MIC hole (8) direct with distance in 30 cm to get the best speakerphone performance when necessary.

### Redial For Last Call function

1. To redial for last called number by the Bluetooth Speaker, even it is in music playing mode.
2. Press twice the **⏸** button (5) to enter into redial function, the playing will pause and switch to hand free function for redial.
3. Press the **⏸** button (5) again to hang up the redial call.


### Low Power Reminder And Auto Sleep

1. The Bluetooth Speaker will send tone sound once in very few seconds, when you heard this tone sound, please connect the device to the USB power for charging if you still want to use the device.
2. If not, the Bluetooth Speaker will power Off to sleep mode when the battery is keeping low energy level in minutes.

### Reset The Bluetooth Speaker

1. In some circumstances the device's function may hanging and need to reset. To reset the Bluetooth speaker;
2. Press and hold the **-** button (3) and **+** button (4) at the same time. The device is reset and will turn Off and turn On automatically.

**Important:** Do not reset the device if it is proper working.

1. Open your device, and connect with Aux-in cable, the indicator will be always light in blue when it works. Under this status, all buttons can not use, expect the  button (1).

### **FCC Warning Statement**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does

cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.