


Schematics Diagram of the model 4UELM-00

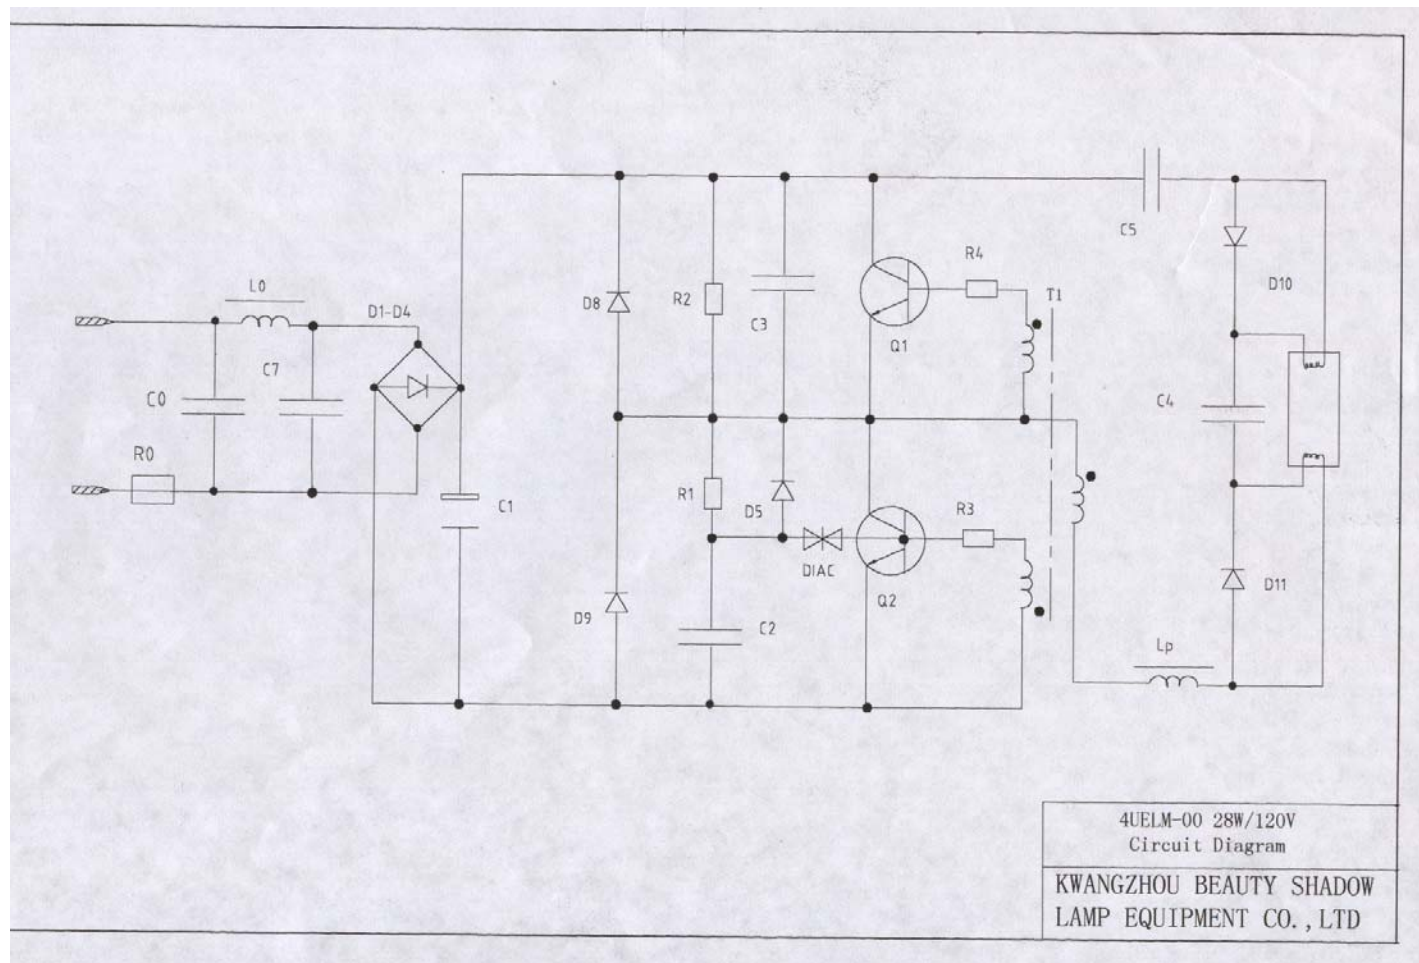

FCC ID RRHBEAUTYLIGHT

BILL OF MATERIAL

(4UELM-00 28W/120V)


VERSION A							
	CODE	DESCRIPTION	SPECIFICATION	QTY	UNIT	REMARK	MANUFACTURE
1	R0	FUSE	1.5A -250V	1	Pc	UL	
2	R1	RESISTOR	RT-330K Ω -0.25W	1	Pc		
3	R2	RESISTOR	RT-560K Ω -0.25W	1	Pc		
4	R3, R4	RESISTOR	RT-10 Ω -0.5W	2	Pcs		
5	C0, C7	CAPACITOR	CL21/MKT 400V-0.1 μ F	2	Pcs		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.
6	C1	ELCAP	200V-33 μ f	1	Pc		
7	C2	CAPACITOR	CL11/MKT 100V-0.022 μ F	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.
8	C3	CAPACITOR	CL11/MKT 1000V-1000PF	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.
9	C4	CAPACITOR	CL11/CBB13/MKT 1200V/1000V 10000PF	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD.OR SIMMONS ELECTRONIC PRODUCTS LTD.
10	C5	CAPACITOR	CL21/MKT 400V-0.1 μ F	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.

FCC ID RRHBEAUTYLIGHT

11	C6	/	/	/	/	/	/
12	D1-D5	DIODE	D0-41-IN4007	5	Pcs		
13	D6-D7	/	/	/	/	/	/
14	D8-D9	DIODE	D0-41-IN4007	2	Pcs		
15	D10-D11	DIODE	D0-41-FR107	2	Pcs		
16	DIAC	TRIGGER DIODE	D0-32V-DB3	1	Pc		
17	Q1, Q2	TRANSISTOR	TO-220-13007	2	Pcs		
18	L0	FILTER COIL	ϕ 6x8 1mH 200T 2 Ω ϕ 0.19mm -20°C →120°C	1	Pc	UL	
19	L1	CHOKE COIL	EE-22	1	Set		
20	T1	TOROID	FR-10x6x3	1	Pc		
21	PCB	PRINTED CIRCUIT BOARD	BS-4	1	Pc	UL	
22		TUBE	ϕ 12 4U 28W 2700K	1	Pc		
23		BASE	E26	1	Pc		
24		TOP CABINET	4UELM-00 E26	1	Pc	UL	
25		BOTTOM CABINET	4UELM-00	1	Pc	UL	
26		BASE WIRE	ϕ 0.5mm 200°C	2	Pcs	UL	
27		TOROID WIRE	ϕ 0.4mm 200°C	3	Pcs	UL	

ISSUED BY: 刘白英CHECKED BY: 王瑞红DATE: 2003.8.26

Schematics Diagram of the model SELM-00

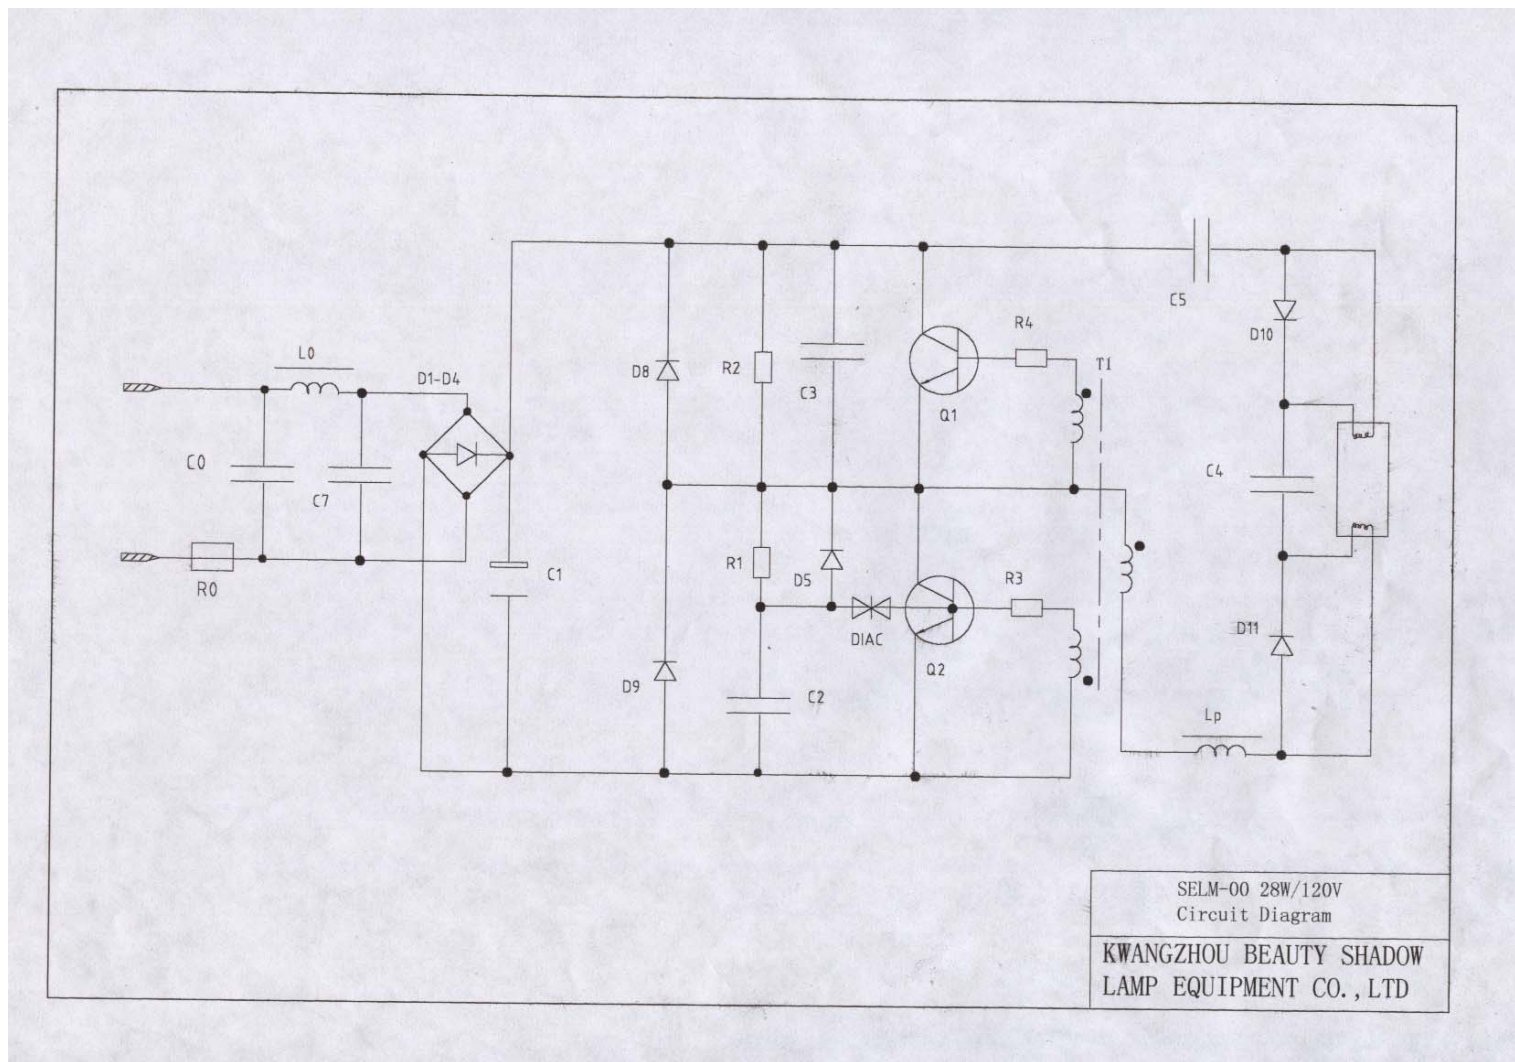

FCC ID RRHBEAUTYLIGHT

BILL OF MATERIAL

(SELM-00 28W/120V)

VERSION A							
	CODE	DESCRIPTION	SPECIFICATION	QTY	UNIT	REMARK	MANUFACTURE
1	R0	FUSE	1.5A -250V	1	Pc	UL	
2	R1	RESISTOR	RT-330K Ω -0.25W	1	Pc		
3	R2	RESISTOR	RT-560K Ω -0.25W	1	Pc		
4	R3, R4	RESISTOR	RT-10 Ω -0.5W	2	Pcs		
5	C0, C7	CAPACITOR	CL21/MKT 400V-0.1uF	2	Pcs		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONISC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.
6	C1	EL.CAP	200V-33uf	1	Pc		
7	C2	CAPACITOR	CL11/MKT 100V-0.022uF	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.
8	C3	CAPACITOR	CL11/MKT 1000V-1000PF	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.
9	C4	CAPACITOR	CL11/CBB13/MKT 1200V/1000V 10000PF	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD.OR SIMMONS ELECTRONISC PRODUCTS LTD.
10	C5	CAPACITOR	CL21/MKT 400V-0.1 μ F	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.

FCC ID RRHBEAUTYLIGHT


11	C6	/	/	/	/	/	/
12	D1-D5	DIODE	D0-41-IN4007	5	Pcs		
13	D6-D7	/	/	/	/	/	/
14	D8-D9	DIODE	D0-41-FR107	2	Pcs		
15	D10-D11	DIODE	D0-41-IN4007	2	Pcs		
16	DIAC	TRIGGER DIODE	D0-32V-DB3	1	Pc		
17	Q1, Q2	TRANSISTOR	TO-220-13007	2	Pcs		
18	L0	FILTER COIL	$\phi 6 \times 8$ 1mH 200T 2 Ω $\phi 0.19\text{mm}$ -20°C $\rightarrow 120^{\circ}\text{C}$	1	Pc	UL	
19	L1	CHOKE COIL	EE-22	1	Set		
20	T1	TOROID	FR-10 $\times$ 6 $\times$ 3	1	Pc		
21	PCB	PRINTED CIRCUIT BOARD	BS-4	1	Pc	UL	
22		TUBE	$\phi 12$ S 28W 2700K	1	Pc		
23		BASE	E26	1	Pc		
24		TOP CABINET	SELM-00 E26	1	Pc	UL	
25		BOTTOM CABINET	SELM-00	1	Pc	UL	
26		BASE WIRE	$\phi 0.5\text{mm}$ 200 $^{\circ}\text{C}$	2	Pcs	UL	
27		TOROID WIRE	$\phi 0.4\text{mm}$ 200 $^{\circ}\text{C}$	3	Pcs	UL	

ISSUED BY: 刘仁英

CHECKED BY: 刘仁英

DATE: 2003. 8. 26

Schematics Diagram of the model 3UELM-08-20

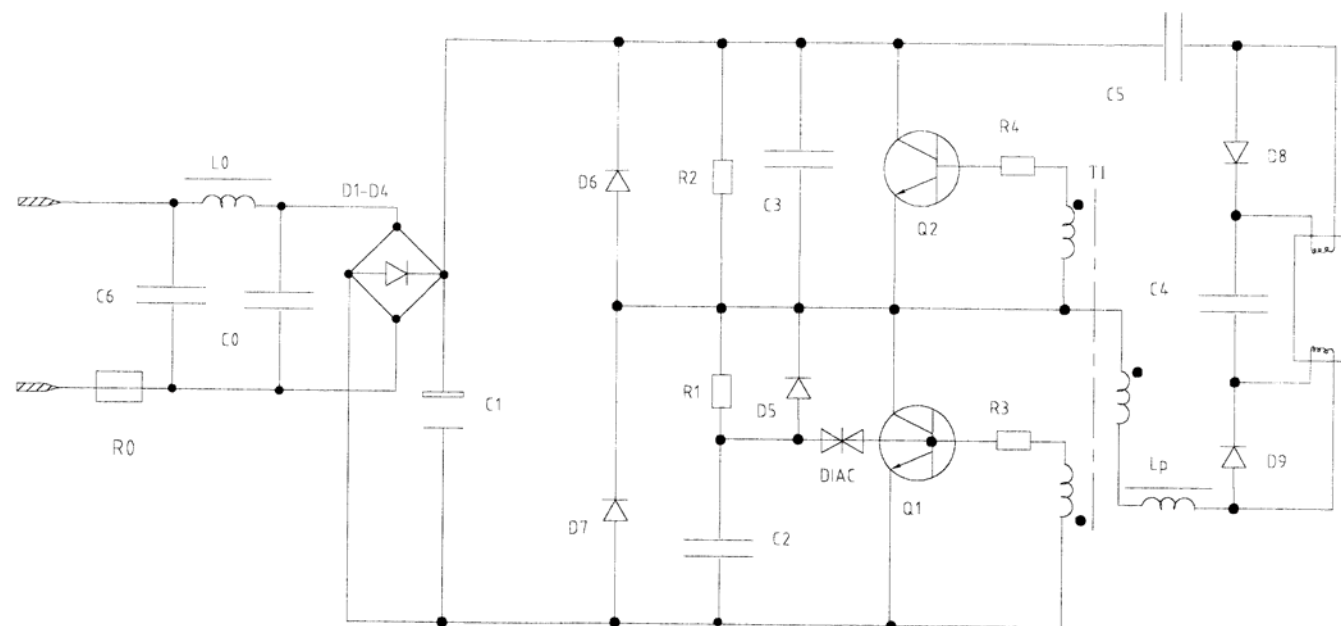

3UELM-08-20 20W/120V

KWANGZHOU BEAUTY SHADOW
LAMP EQUIPMENT CO., LTD

FCC ID RRHBEAUTYLIGHT

BILL OF MATERIAL

3UELM-08-20 20W/120V


VERSION A							
	CODE	DESCRIPTION	SPECIFICATION	QTY	UNIT	REMARK	MANUFACTURE
1	R0	FUSE	1A -250V	1	Pc	UL	
2	R1、 R2	RESISTOR	RT-560K Ω -0.25W	2	Pcs		
3	R3、 R4	RESISTOR	RT-22 Ω -0.25W	2	Pcs		
4	C0、 C6	CAPACITOR	CL21/MKT 400V-0.1 μ F	2	Pcs		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.
5	C1	EL.CAP	200V-22 μ F	1	Pc		
6	C2	CAPACITOR	CL11/MKT 100V-0.022 μ F	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.
7	C3	CAPACITOR	CL11/MKT 1000V-1000PF	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.
8	C4	CAPACITOR	CL11/CBB13/MKT 1000V-5600PF	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD.OR SIMMONS ELECTRONIC PRODUCTS LTD.
9	C5	CAPACITOR	CL21/MKT 400V-0.1 μ F	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.
10	D1-D9	DIODE	D0-41-1N4007	9	Pcs		
11	DIAC	TRIGGER DIODE	D0-32V-DB3	1	Pc		

FCC ID RRHBEAUTYLIGHT

12	Q1, Q2	TRANSISTOR	TO-220-13005	2	Pcs		
13	L0	FILTER COIL	$\phi 6 \times 8$ 1mH 200T 2 Ω $\phi 0.19$ mm -20°C $\rightarrow 120^{\circ}\text{C}$	1	Pc	UL	
14	L1	CHOKE COIL	EE-19	1	Set		
15	T1	TOROID	FR-10 $\times$ 6 $\times$ 3	1	Pc		
16	PCB	PRINTED CIRCUIT BOARD	B-5	1	Pc	UL	
17		TUBE	$\phi 12$ 3U 20W 2700K	1	Pc		
18		BASE	E26	1	Pc		
19		TOP CABINET	3UELM-08 E26	1	Pc	UL	
20		BOTTOM CABINET	3UELM-08	1	Pc	UL	
21		BASE WIRE	$\phi 0.5$ mm 200°C	2	Pcs	UL	
22		TOROID WIRE	$\phi 0.4$ mm 200°C	3	Pcs	UL	

ISSUED BY: 刘仁英CHECKED BY: 王华DATE: 2003.9.26

Schematics Diagram of the model 3UELM-08-15

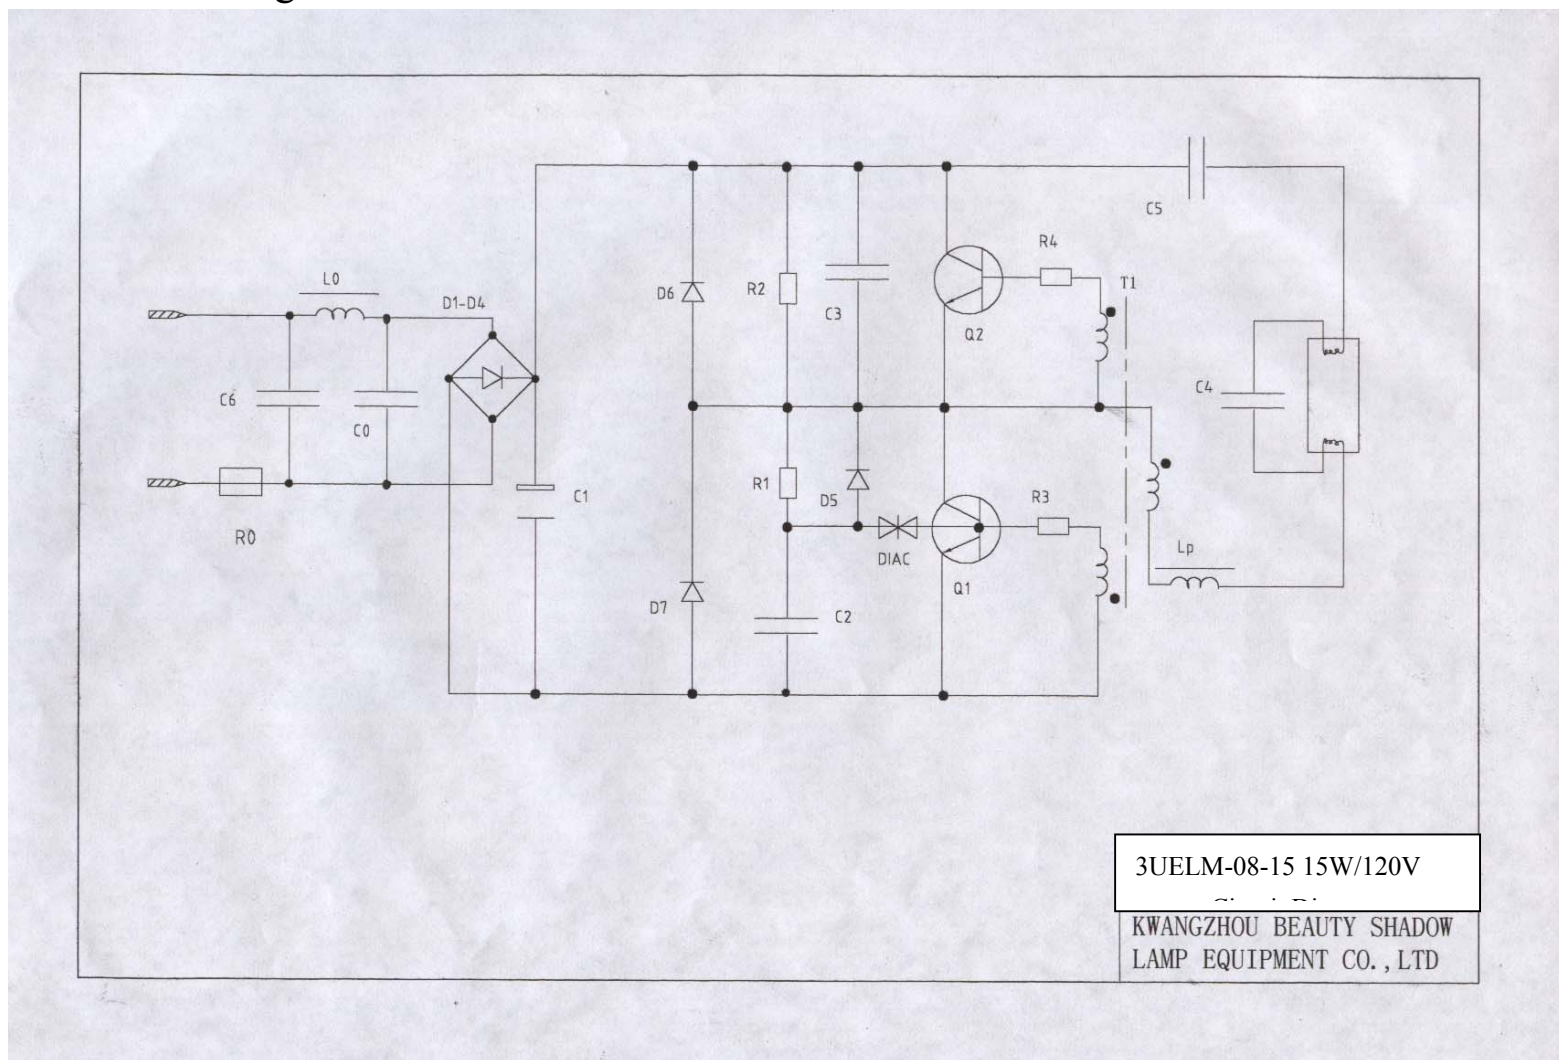

FCC ID RRHBEAUTYLIGHT

BILL OF MATERIAL

3UELM-08-15 15W/120V

VERSION A							
	CODE	DESCRIPTION	SPECIFICATION	QTY	UNIT	REMARK	MANUFACTURE
1	R0	FUSE	1A-250V	1	Pc	UL	
2	R1、R2	RESISTOR	RT-560K Ω -0.25W	2	Pcs		
3	R3、R4	RESISTOR	RT-10 Ω -0.25W	2	Pcs		
4	C0、C6	CAPACITOR	CL21/MKT 400V-0.1uF	2	Pcs		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.
5	C1	EL.CAP	200V-22uF	1	Pc		
6	C2	CAPACITOR	CL11/MKT 100V-0.022uF	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.
7	C3	CAPACITOR	CL11/MKT 1000V-1500PF	1	Pc		ZHANJIANG DON'S ELECTRONIC CO.,LTD. OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONISC PRODUCTS LTD.
8	C4	CAPACITOR	CL11/CBB13/MKT 1000V-4700PF	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD.OR SIMMONS ELECTRONIC PRODUCTS LTD.
9	C5	CAPACITOR	CL21/MKT 400V-0.1 μ F	1	Pc		DONGGUAN HUMEN ZHONG SHENG CAPACITOR FACTORY OR BENNIC INDUSTRIES CO.,LTD. OR SIMMONS ELECTRONIC PRODUCTS LTD.OR XIAMEN FARATRONIC CO.,LTD.
10	D1-D7	DIODE	D0-41-1N4007	7	Pcs		

FCC ID RRHBEAUTYLIGHT

11	DIAC	TRIGGER DIODE	D0-32V-DB3	1	Pc		
12	Q1, Q2	TRANSISTOR	TO-220-13003	2	Pcs		
13	L0	FILTER COIL	ϕ 6x8 1mH 200T 2 Ω ϕ 0.19mm -20°C→ 120°C	1	Pc	UL	
14	L1	CHOKE COIL	EE-19	1	Set		
15	T1	TOROID	FR-10×6×3	1	Pc		
16	PCB	PRINTED CIRCUIT BOARD	B-5	1	Pc	UL	
17		TUBE	ϕ 12 3U 15W 2700K	1	Pc		
18		BASE	E26	1	Pc		
19		TOP CABINET	3UELM-08 E26	1	Pc	UL	
20		BOTTOM CABINET	3UELM-08	1	Pc	UL	
21		BASE WIRE	ϕ 0.5mm 200°C	2	Pcs	UL	
22		TOROID WIRE	ϕ 0.4mm 200°C	3	Pcs	UL	

ISSUED BY: 刘白英CHECKED BY: 叶明华DATE: 2003. 9. 26