


DTD:13/11/2019

Wireless Headset Model:


RZ04-024901

WHAT'S INSIDE

- Wireless Headset model:RZ04-024901

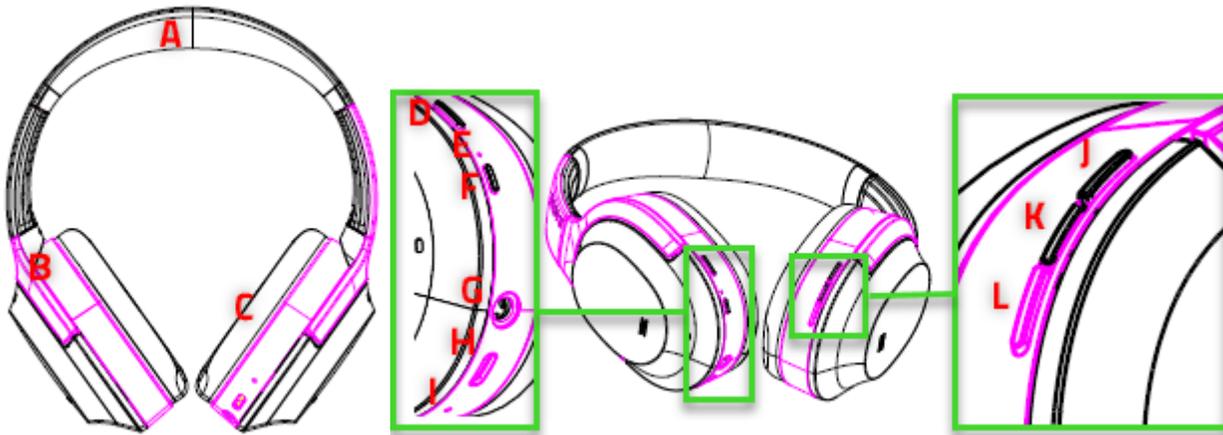

- A. Adjustable padded leatherette headband
- B. Rotatable circumaural ear cup design
- C. Plush memory foam ear cushions
- D. ANC/Ambient button**
- E. Status indicator
- F. Power button**
- G. 3.5mm audio socket
- H. USB-C port
- I. Mic diaphragm
- J. Volume up button
- K. Center button
- L. Volume down button

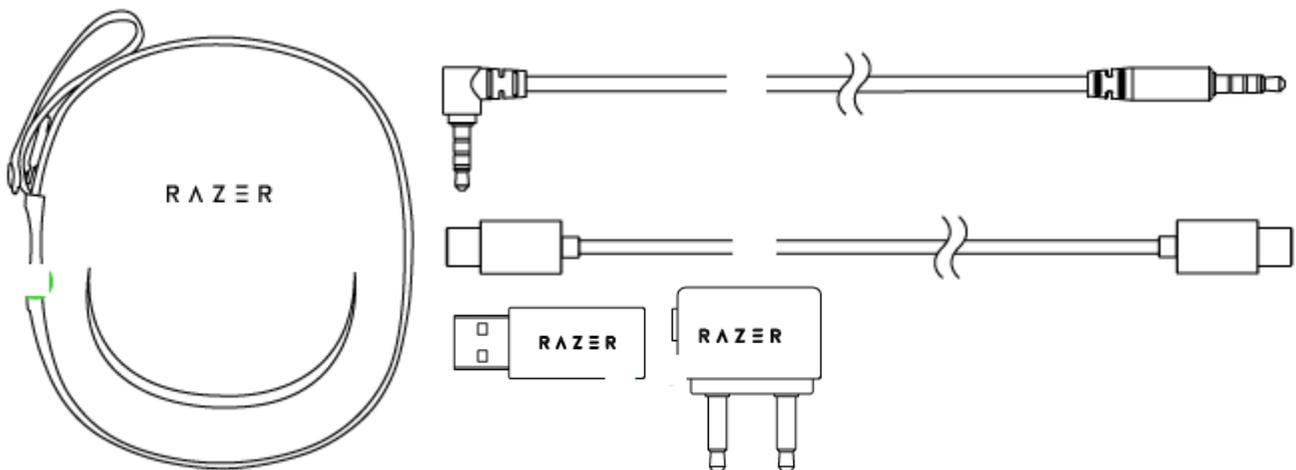

- Premium Carry Case
- 3.5mm audio cable
- USB-C charging cable
- USB-A to USB-C adapter
- Airline headphone adapter

WHAT'S NEEDED

PRODUCT REQUIREMENTS


- [Wireless mode] Devices with Bluetooth connectivity
- [Wired mode] Devices with a 3.5mm headphone socket

MOBILE APP REQUIREMENTS

- iOS or Android device with Bluetooth connectivity
- Internet connection
- 50 MB of free storage space for iOS
- 10 MB of free storage space for Android

LET'S GET YOU COVERED

You've got a great device in your hands complete with a 2-year limited warranty coverage. Now maximize its potential and score exclusive Razer benefits by registering at razerid.razer.com

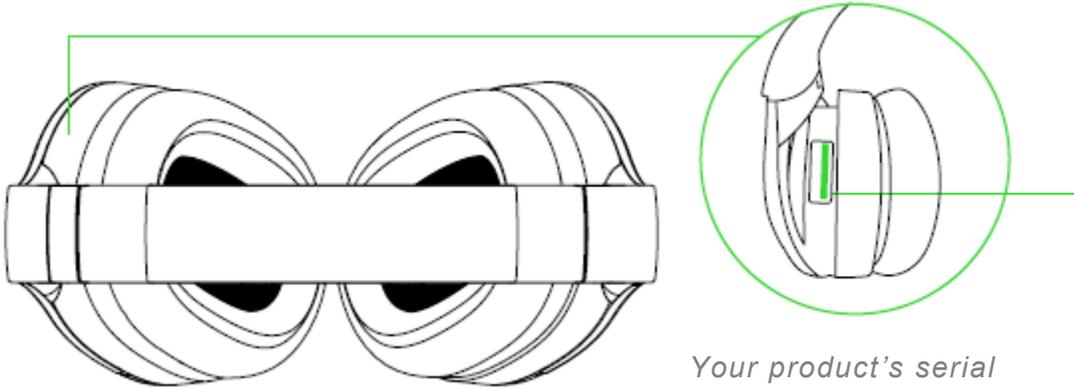


Your product's serial number can be found

GETTING STARTED


CHARGING YOUR HEADSET

Connect your Razer Opus directly to any USB-C port using the charging cable or to any USB-A port using the adapter. For best results, please fully charge your headset before using it for the first time. A depleted battery will fully charge in about 4 hours.

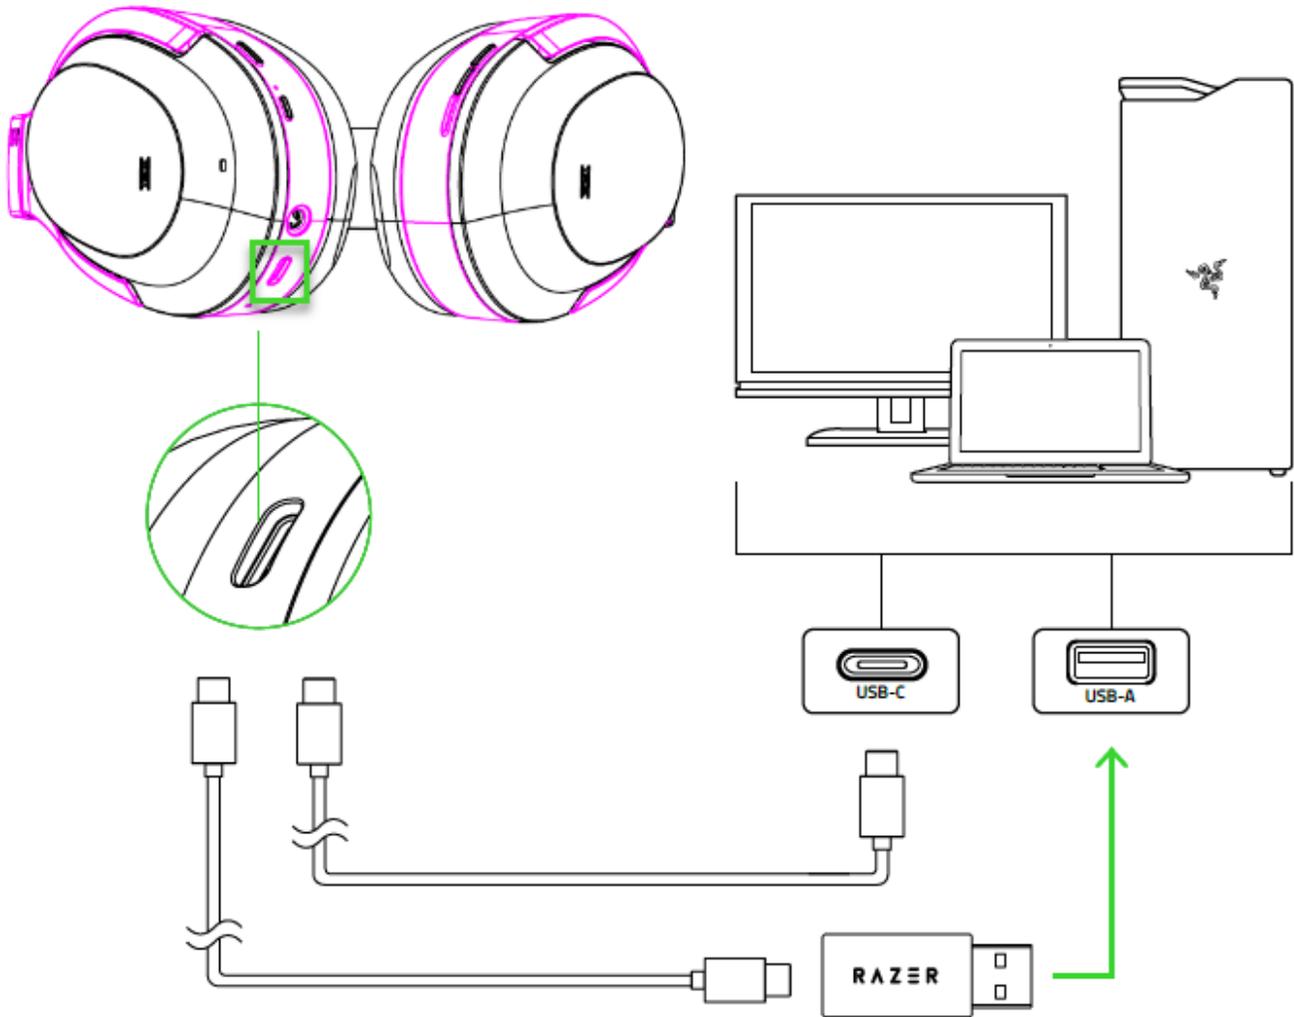


While charging, your Razer Opus will continuously show its battery level on the status indicator, as shown here:

| STATUS INDICATOR | DESCRIPTION |
|---|---------------|
|  | Charging |
|  | Fully charged |

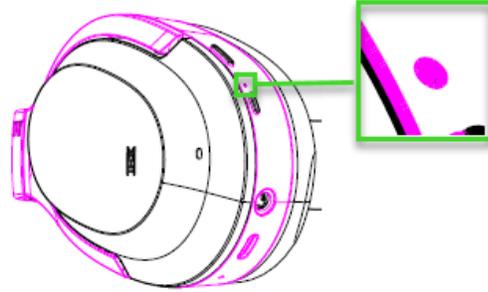


WIRELESS MODE

While powered off, press and hold the power button until the status indicator starts blinking blue. A pairing mode tone will notify you that your Razer Opus is searching for compatible Bluetooth devices. Follow your device's instructions to pair it with your Razer Opus. Once the headset is paired, the status indicator will change to static blue.

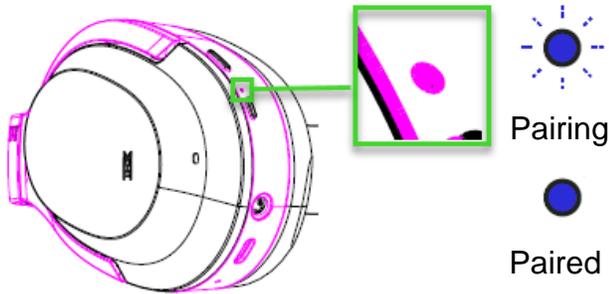

WIRED MODE


Connect your Razer Opus to any 3.5mm audio socket using the provided 3.5mm audio cable. You can also use the airline headphone adapter along with the 3.5mm audio cable for in-flight audio jacks. As long as your headset is powered on, you can still use ANC and Ambient Awareness in wired mode.

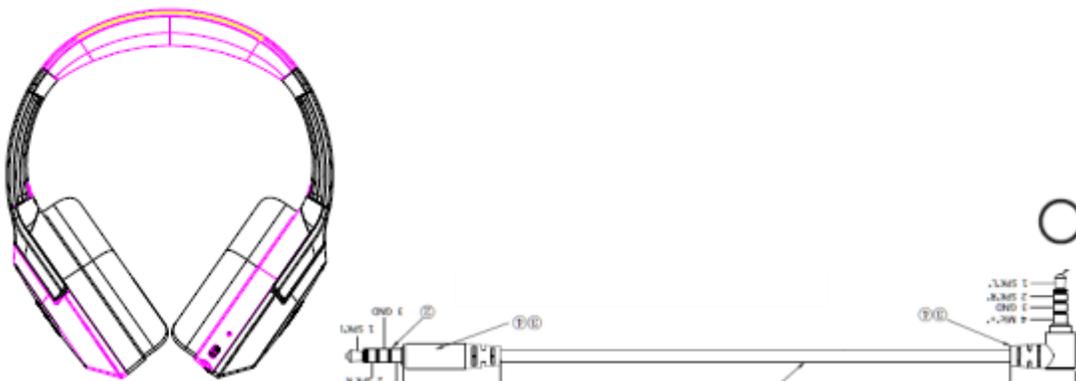

USING YOUR RAZER OPUS


POWER ON/OFF

Press and hold the power button until the status indicator turns green to power on. Press and hold the power button again until the status indicator turns red to power off. Two distinct tones will help notify you that your Razer Opus is powered on or off.

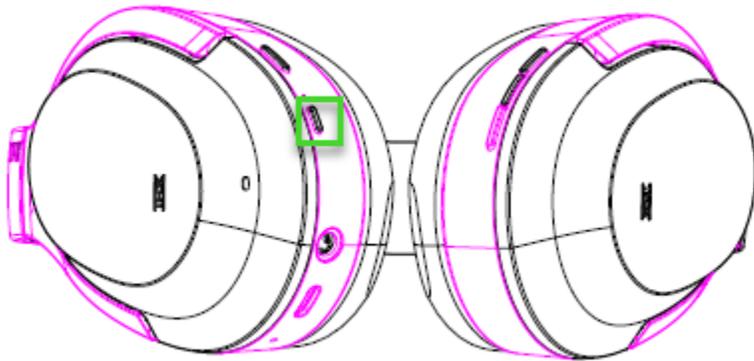

BATTERY LEVEL

While unplugged, your Razer Opus will briefly show its battery level on the status indicator when you power on the headset. While in use, there will be a tone notification when the battery needs recharging, as shown here:

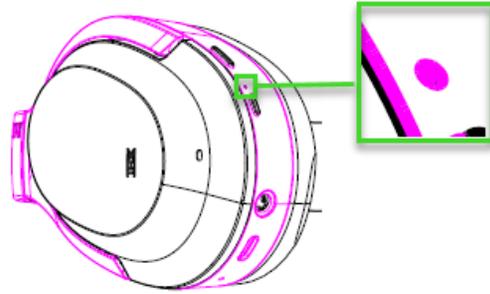

| STATUS INDICATOR | TONE NOTIFICATION | DESCRIPTION |
|---|---|------------------------------|
|  | None  | Battery sufficiently charged |
|  | Once  | Battery low |
|  | Every 5 minutes  | Battery critically low |

HEADSET CONTROLS


The following controls are available when connected to your device via Bluetooth. **These controls operate based on your device's current activity.**

Note: Some features listed here may not be applicable to certain devices.

| | | |
|---|--------------------|---|
|  | VOLUME UP BUTTON | |
| | Single press | Increase audio volume |
| | Press and hold | Continuously increase audio volume |
|  | VOLUME DOWN BUTTON | |
| | Single press | Decrease audio volume |
| | Press and hold | Continuously decrease audio volume |
|  | CENTER BUTTON | |
| | Single press | Play/pause |
| | | Accept incoming call or end current call |
| | | Put call on-hold and accept incoming call |
| | | End call and swap to on-hold call |
| | Press and hold | Launch voice command |
| | | Reject incoming call |
| Swap calls | | |
| Double press | Skip track | |
| Triple press | Rewind track | |


ACTIVE NOISE CANCELLATION (ANC)

Active Noise Cancellation helps eliminate background noise. While powered on, press the ANC/Ambient button to enable or disable ANC. Two distinct tones will notify you that the ANC is either enabled or disabled. Active noise cancellation will work for both wired and wireless connection.

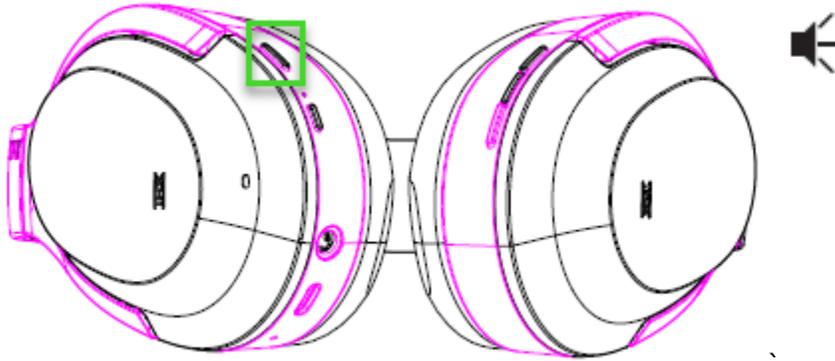


AMBIENT AWARENESS

Ambient awareness allows you to hear your surroundings without needing to remove your headset. While connected via Bluetooth, press and hold the ANC/Ambient button to activate ambient awareness. To deactivate this function, simply remove your finger from the button.

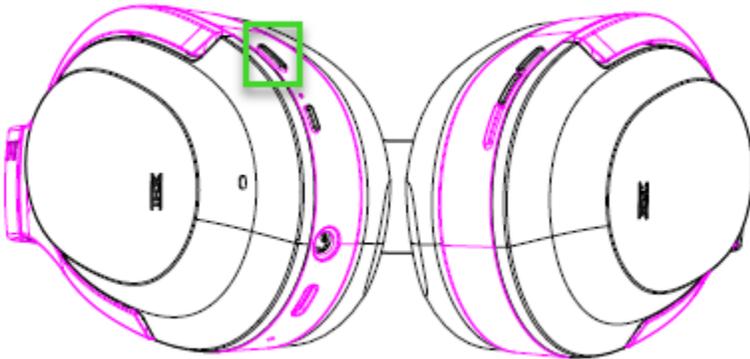


COMFORT

We recommend stretching the headset gently apart before placing them over your head to minimize headband stress. However, please avoid overstretching the headset beyond its technical limits.

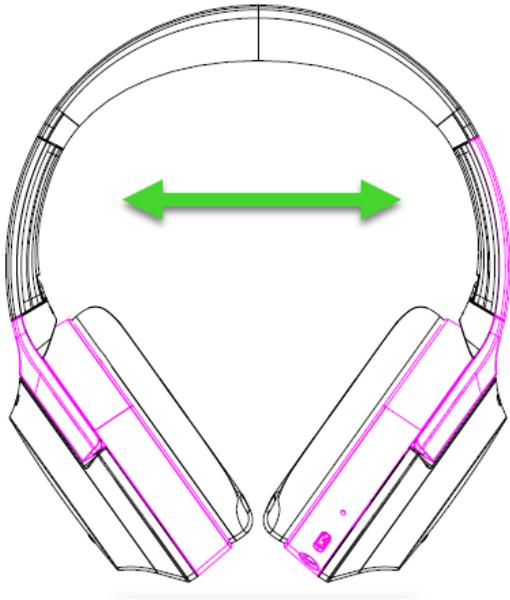

DOWNLOAD THE APP

Making advanced customization just got a whole lot easier for your Razer Opus. With its own mobile app, you can select THX or other equalizer presets, and much more—anytime, anywhere.

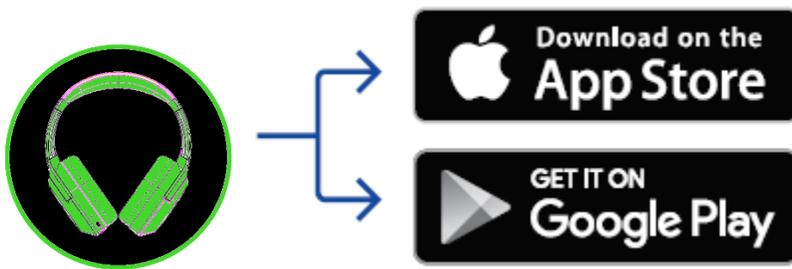

1. Download the mobile app on your mobile device.
2. Launch the app and follow the onscreen instructions.

Please refer to the Online Master Guide at support.razer.com for in-depth instructions on how to configure and use your Razer Opus.

SAFETY AND MAINTENANCE

SAFETY GUIDELINES

In order to achieve maximum safety while using your Razer Opus, we suggest that you adopt the following guidelines:

Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to support.razer.com for assistance.

Do not take apart the device (doing so will void your warranty) and do not attempt to operate it under abnormal current loads.

Keep the device away from liquid, humidity or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device in order to let the temperature stabilize to an optimal level.

The device isolates external ambient sounds even at low volumes, resulting in lowered awareness of your external surroundings. Please remove the device when engaging in any activity that requires active awareness of your surroundings.

Listening to excessively loud volume over an extended period of time can damage your hearing. Furthermore, legislation of certain countries permits only a maximum sound level of 86dB for 8 hours a day. We therefore recommend that you reduce the volume to a comfortable level when listening for prolonged periods of time. Please, take good care of your hearing.

MAINTENANCE AND USE

The Razer Opus requires minimum maintenance to keep it in optimum condition. Once a month we recommend you clean it using a soft cloth or cotton swab to prevent dirt buildup. Do not use soap or harsh cleaning agents.

LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2020 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, “For Gamers. By Gamers.”, and “Powered by Razer Chroma” logo are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States or other countries. All other trademarks and trade names are the property of their respective owners and other company and product names mentioned herein may be trademarks of their respective companies.

THX and the THX logo are trademarks of THX Ltd., registered in the U.S. and other countries.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. App Store is a service mark of Apple Inc.

Android™ and Google Play™ are trademarks of Google Inc.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Razer Inc. (“Razer”) may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Opus (the “Product”) may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit: [razer.com/warranty](https://www.razer.com/warranty).

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer’s liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.



STATEMENT OF COMPLIANCE WITH EU DIRECTIVE

ENGLISH

STATEMENT OF COMPLIANCE WITH EU DIRECTIVE

Hereby, Razer (Europe) GmbH, declares that this Razer Opus (Wireless headset Model: RZ04-024901) is in compliance with the essential requirements and other relevant provisions of Directive 2014/30/EU and 2015/863/EU.

Wireless Headset

Radio Frequency: Bluetooth

Operating Frequency: 2402-2480Mhz

Max Output power: <7dBm

SW version: 1.0

The full Declaration of Conformity can be requested via the following :

Company: Razer (Europe) GmbH

Address: Essener Bogen 23, 22419 Hamburg,Germany

E-mail: compliance@razer.com

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. FOR GAMERS. BY GAMERS.™ 14

Canada Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

1) L'appareil ne doit pas produire de brouillage;

2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.