

# BP075CU

## Bluetooth Stereo Speaker User Manual

The Bluetooth stereo speaker is compatible with laptops, mobile phones or other portable devices with Bluetooth function. You can enjoy the stereo music with output 2.0 power amplify through Bluetooth connecting.

It can also connect all kinds of audio resources through the two ends  $\Phi 3.5$  audio. So you can use it as a smart portable speaker with the features of good flexibility, using conveniently, good quality and low distortion.

Please read this user manual carefully before using the stereo Bluetooth speaker, and also read your device's user manual regarding the bluetooth function and pay attention to those important safety and maintenance information.

Please keep the speaker away from children.

### Specifications

Connecting way	Line IN/Bluetooth
Sound Track System	2.0 power amplify output
Output power	2x5W
Bluetooth Profiles Supported	V3.0+EDR Stereo
Transmission Power	Class 2
Operation Range	10 meters
Frequency Range	2.4-2.4835GHz
Battery (external)	700mah
Charging Voltage	4.5-5.5V
Dimensions (mm)	184(L) x47(W) x47(H)


### Working time

1. It can work continuously more than 8 hours with 700mah Lithium battery in 50% volume via Bluetooth connecting. While it can work more than 9 hours continuously with LINE inputting sound resources.

2. It can work continuously more than 4 hours with 700mah Lithium battery in maxima volume via Bluetooth connecting. While it can work more than 5 hours continuously with LINE inputting sound resources.

\*The playing time is deeply related to the status of signal when playing music. Above time is only for reference. The actual circumstance may have the error margin.

### Structure Sketch

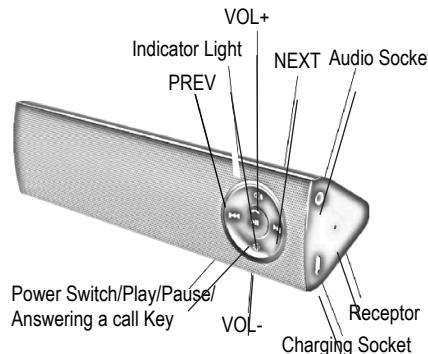

### Base Operations

#### Charging the Speaker

1. When the Bluetooth speaker is running out of battery, the sound will become diminishing or cracked, please charge the Bluetooth speaker or replace battery at this time.

2. The indicator light turns red while being charged. If the speaker is working while being charged, the indicator light will flash red and pink alternately. While if use the line-input function while being charged, the indicator light will flash pink.

#### Note:

\*Use only the supplied charger to charge the speaker, or could be dangerous and obey the validation for this product or the maintenance article.

\*The Micro USB port is used only to charge the Bluetooth speaker. You can use the USB port of computer or other 5V compatible chargers with charging voltage of 4.5-5.5V to charge. Over-voltage may cause serious danger.

### Pairing the Speaker with Bluetooth Devices

1. Ensure the speaker is off, and the distance between the speaker and Bluetooth devices is within 1 meter.
2. Press and hold the PLAY key for 4 seconds, and then you will hear four beeps, and this speaker will enter the state of turning on. When you still press for another 2 seconds and hear 2 beeps, the speaker will enter the state of searching and the indicator light will flash blue each second. Once the bluetooth devices search out the Bluetooth speaker "BP075CU", please enter the passkey "0000", then the indicator light will flash blue shortly. It will take a long beep after paired successfully. The blue indicator light will flash blue each 5 seconds, and then you can enjoy perfect music wirelessly.

You need press and hold the PLAY key for 4 seconds to turn off the speaker, and then you will hear a short noting sound and 4 beeps, then the speaker will enter the power off mode, and end your music playing.

### Connect With Other Sound Source Devices

1. When inserting the 3.5mm audio plug, the Bluetooth function will automatically disconnected and enter into AUX mode. So the Bluetooth speaker also can be used as a portable 2.0 speaker.

2. When using line-input function, the Bluetooth speaker can be used as a common portable speaker. Please control the buttons of PLAY/PAUSE/BACKWARD/FORWARD from your devices directly, but VOL+/VOL- from this Bluetooth speaker.

### Instructions for Buttons and Sockets

1. Prev: Press once to backward to the last song
2. PLAY/PAUSE: Press once for music playing, or answering the calls and press again to pause.
3. NEXT: Press once to forward to next song
4. VOL+: Press constantly to increase volume
5. VOL-: Press constantly to reduce volume
6. AUX: Input port to connect sound resources
7. OFF/ON: Power switch, turn on/off the speaker
8. DC5V Micro USB Socket
9. Receptor

### Disconnecting

To disconnect the speaker from your Bluetooth device, please turn off the speaker or disconnect the speaker from the Bluetooth menu of your mobile phone or other devices.

### Care and Maintenance

1. Do not use abrasive cleaning solvents to clean the speaker.
2. Do not allow the speaker to touch with any sharp objects since this will cause scratching and damage.
3. Be sure to store the speaker in a dry place, free from high temperature, humidity and dust.

#### NOTE:

1. The bluetooth speaker will pair again in over 20 seconds when disconnected or power off while being used (both the 2 device's Bluetooth function stopped acting).
2. Most brand Bluetooth devices can connect this Bluetooth speaker automatically after both turned on and paired well; If any brand mobile phones cannot connect automatically, then you need to operate manually.

3. After connected with most brands Bluetooth devices, the speaker can work well with main functional buttons to Play/Pause, Backward/Forward, but several brand mobile phones cannot control all the buttons, only can play VOL+/VOL-

4. If your device's Bluetooth function breaks off when playing music, please reactivate your Bluetooth function and press the PLAY/PAUSE button once. Then they will reconnect soon. You needn't restart your Bluetooth speaker.

### Additional Statements

- The speaker is compliant with the specified Bluetooth version. It does not guarantee compatibility of all functions on every Bluetooth enabled device. please check your device's user manual for compatibility and functionality.
- The above operations may vary due to different devices.
- Manufacturer reserves the right of final explanation of all the above statements.

### FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio

communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.