

WHA YU INDUSTRIAL CO., LTD. (HEAD OFFICE)
 DONGGUAN AEON TECH CO.,LTD.(CHINA)
 TAI HWA ELECTRONIC CO., LTD.(CHINA)
 SHANGHAI HUA YU ELECTRONIC CO., LTD.(CHINA)
 SU ZHOU AEON TECH CO., LTD. (CHINA)

SPECIFICATION FOR APPROVAL

CUSTOMER: 明泰科技股份有限公司


PART NAME: RF Antenna Assembly

PART NO.:

REVISION:

W. Y. P/NO.: C037-510734-A

REV.: X2

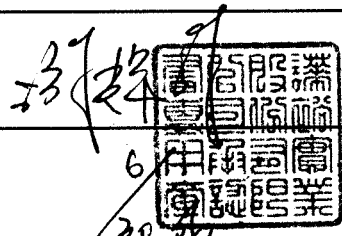	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :	6/20/08	

WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

譚裕實業股份有限公司

Address: No. 326, Sec. 2, Kung Tao 5 Road, Hsin Chu City, Taiwan, R.O.C.

Tel: +886-3-5714225(REP) Fax: + 886-3-5713853 · + 886-3-5723600

DONGGUAN AEON TECH CO.,LTD.(CHINA)

東莞台霖電子通訊有限公司

Address: Lakeside Industrial Park, Da Ling Shan Town, Dong Guan City, Guangdong, China

Tel: + 86-769-85655858 Fax: + 86-769-8565525

TAI HWA ELECTRONIC FACTORY

台樺電業製品廠

Address: Pak Ho District, Hou Street Town, Dong Guan City, Guangdong, China

Tel: + 86-769-85599375 · + 86-769-85912375 Fax: + 86-769-85599376

HUA HONG INTERNATIONAL LTD.

華弘國際有限公司

Address: Rm. 1103A, President Commercial Centre, 608 Nathan Road, Mong Kok, Kowloon, Hong Kong

Tel: + 86-852-27712210 Fax: + 86-852-23843747

SHANGHAI HUA YU ELECTRONIC CO., LTD. (CHINA)

上海譚裕電子有限公司

Address: 3586, Wai Qing Song Road, Qing Pu County, Shanghai China

Tel: + 86-21-59741348 · + 86-21-59744101~4 Fax: + 86-21-59741347

SU ZHOU AEON TECH CO., LTD. (CHINA)

蘇州華廣電通有限公司

Address: Limin North Road, LiLi Town, LiLi Industrial Park, LinHu Economic Zone

Wujiang City, Jiangsu Province, China

Tel: + 86-512-63627980 Fax: + 86-512-63627981

Contents

<i>Item</i>	<i>Description</i>	<i>Page</i>
1.	天線規格表 1
2.	成品圖 2
3.	測試報告 3~5
4.	Cable 規格 6~7
5.	Connector 材質特性 8
6.	SGS 測試

RF Antenna Cable Assembly

Specification

1. Electrical Properties :

- 1.1 Frequency Range..... 2.4GHz ~ 2.5GHz
- 1.2 Impedance 50Ω Nominal
- 1.3 VSWR 1.92 Max.
- 1.4 Return Loss..... -10 dB Maximum
- 1.5 Radiation Omni-directional
- 1.6 Gain(peak)..... 2.0dBi
- 1.7 Polarization..... Linear Vertical
- 1.8 Admitted Power..... 1W

2. Physical Properties :

- 2.1 Cable..... RG-178 Coaxial Cable
- 2.2 Antenna Cover..... TPE
- 2.3 Antenna Base..... PC
- 2.4 Antenna Base..... PBT
- 2.5 Operating Temp. -20°C ~ +65°C
- 2.6 Storage Temp. -30°C ~ +75°C
- 2.7 Color Black
- 2.8 Connector..... SMA Plug Reverse

CG-	A	B	C	D	E	F	G																														
1	2	3	4	5	6																																
							<table border="1"> <tr> <th>NO</th> <th>DESCRIPTION</th> <th>QTY</th> <th>REMARK</th> </tr> <tr> <td>6</td> <td>Cable</td> <td>1</td> <td>RG-178, Translucent Brown; 50 Ω</td> </tr> <tr> <td>5</td> <td>Connector</td> <td>1</td> <td>SMA Straight Plug/Reverse</td> </tr> <tr> <td>4</td> <td>Rivet</td> <td>2</td> <td>Brass, Zn Plated (Black)</td> </tr> <tr> <td>3</td> <td>Antenna Base</td> <td>1</td> <td>PBT; Color:Black</td> </tr> <tr> <td>2</td> <td>Antenna Base</td> <td>1</td> <td>PC; Color:Black</td> </tr> <tr> <td>1</td> <td>Antenna Cover</td> <td>1</td> <td>TPE; Color:Black</td> </tr> </table>	NO	DESCRIPTION	QTY	REMARK	6	Cable	1	RG-178, Translucent Brown; 50 Ω	5	Connector	1	SMA Straight Plug/Reverse	4	Rivet	2	Brass, Zn Plated (Black)	3	Antenna Base	1	PBT; Color:Black	2	Antenna Base	1	PC; Color:Black	1	Antenna Cover	1	TPE; Color:Black		
NO	DESCRIPTION	QTY	REMARK																																		
6	Cable	1	RG-178, Translucent Brown; 50 Ω																																		
5	Connector	1	SMA Straight Plug/Reverse																																		
4	Rivet	2	Brass, Zn Plated (Black)																																		
3	Antenna Base	1	PBT; Color:Black																																		
2	Antenna Base	1	PC; Color:Black																																		
1	Antenna Cover	1	TPE; Color:Black																																		
							<table border="1"> <tr> <td>XX.</td> <td>±5</td> <td>±1.0</td> <td>±0.1</td> <td>±0.01</td> <td>±0.005</td> </tr> <tr> <td>X.</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.X</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XXX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	XX.	±5	±1.0	±0.1	±0.01	±0.005	X.						.X						.XX						.XXX					
XX.	±5	±1.0	±0.1	±0.01	±0.005																																
X.																																					
.X																																					
.XX																																					
.XXX																																					
							<table border="1"> <tr> <td>XX.</td> <td>±5</td> <td>±1.0</td> <td>±0.1</td> <td>±0.01</td> <td>±0.005</td> </tr> <tr> <td>X.</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.X</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XXX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	XX.	±5	±1.0	±0.1	±0.01	±0.005	X.						.X						.XX						.XXX					
XX.	±5	±1.0	±0.1	±0.01	±0.005																																
X.																																					
.X																																					
.XX																																					
.XXX																																					
							<table border="1"> <tr> <td>XX.</td> <td>±5</td> <td>±1.0</td> <td>±0.1</td> <td>±0.01</td> <td>±0.005</td> </tr> <tr> <td>X.</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.X</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XXX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	XX.	±5	±1.0	±0.1	±0.01	±0.005	X.						.X						.XX						.XXX					
XX.	±5	±1.0	±0.1	±0.01	±0.005																																
X.																																					
.X																																					
.XX																																					
.XXX																																					
							<table border="1"> <tr> <td>XX.</td> <td>±5</td> <td>±1.0</td> <td>±0.1</td> <td>±0.01</td> <td>±0.005</td> </tr> <tr> <td>X.</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.X</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XXX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	XX.	±5	±1.0	±0.1	±0.01	±0.005	X.						.X						.XX						.XXX					
XX.	±5	±1.0	±0.1	±0.01	±0.005																																
X.																																					
.X																																					
.XX																																					
.XXX																																					
							<table border="1"> <tr> <td>XX.</td> <td>±5</td> <td>±1.0</td> <td>±0.1</td> <td>±0.01</td> <td>±0.005</td> </tr> <tr> <td>X.</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.X</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XXX</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	XX.	±5	±1.0	±0.1	±0.01	±0.005	X.						.X						.XX						.XXX					
XX.	±5	±1.0	±0.1	±0.01	±0.005																																
X.																																					
.X																																					
.XX																																					
.XXX																																					

PE Bag
Shrink Line

Packing : 20 pcs/bag

CUSTOMER'S SIGNATURE

CUSTOMER: 明泰

PART NO :

PARTNAME: RF Antenna Assembly

W.Y PNO : C037-510734-A

REV : X1

UNIT : m/m

FILE : 1/1




Wha Yu
INDUSTRIAL CO.,LTD.

諱裕實業股份有限公司
THIS DRAWING, AND ITS INHERENT DESIGN CONCEPTS, ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.




RF Antenna Assembly

P/NO : C037-510734-A SPEC : 2.4GHz

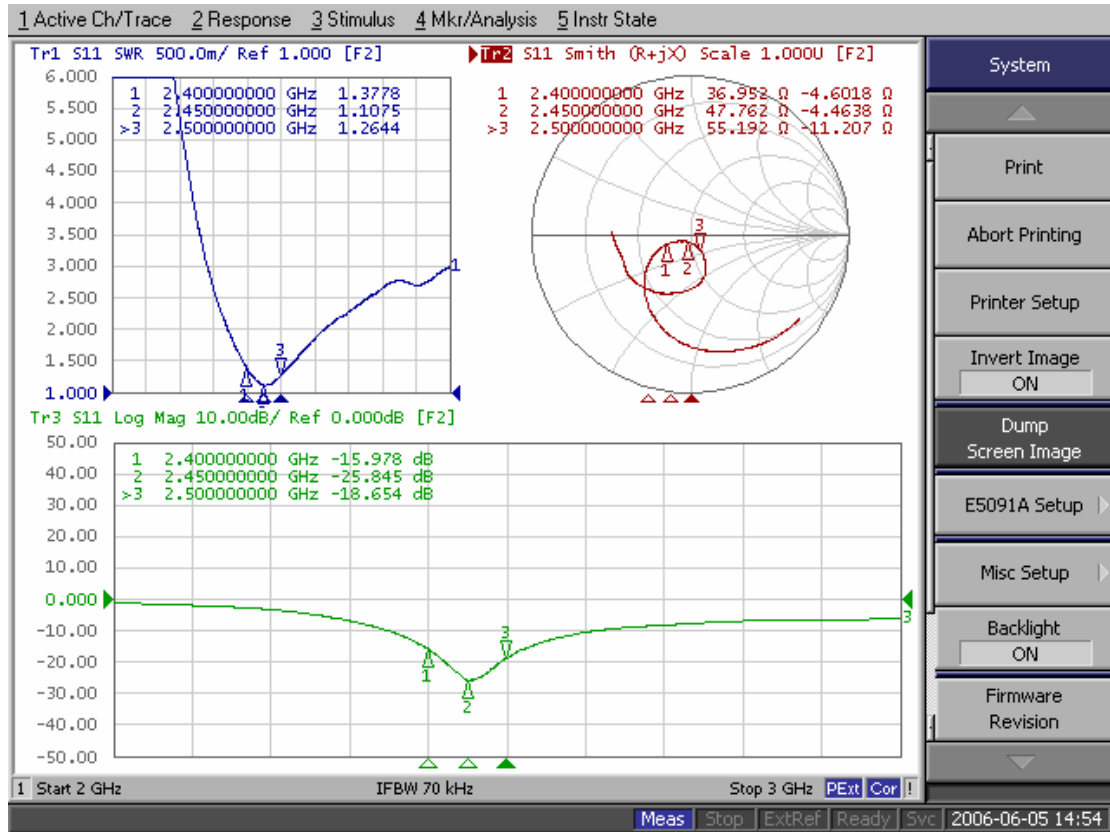


6/6/2006

Far-field amplitude of C037-510734-A-H.nsi

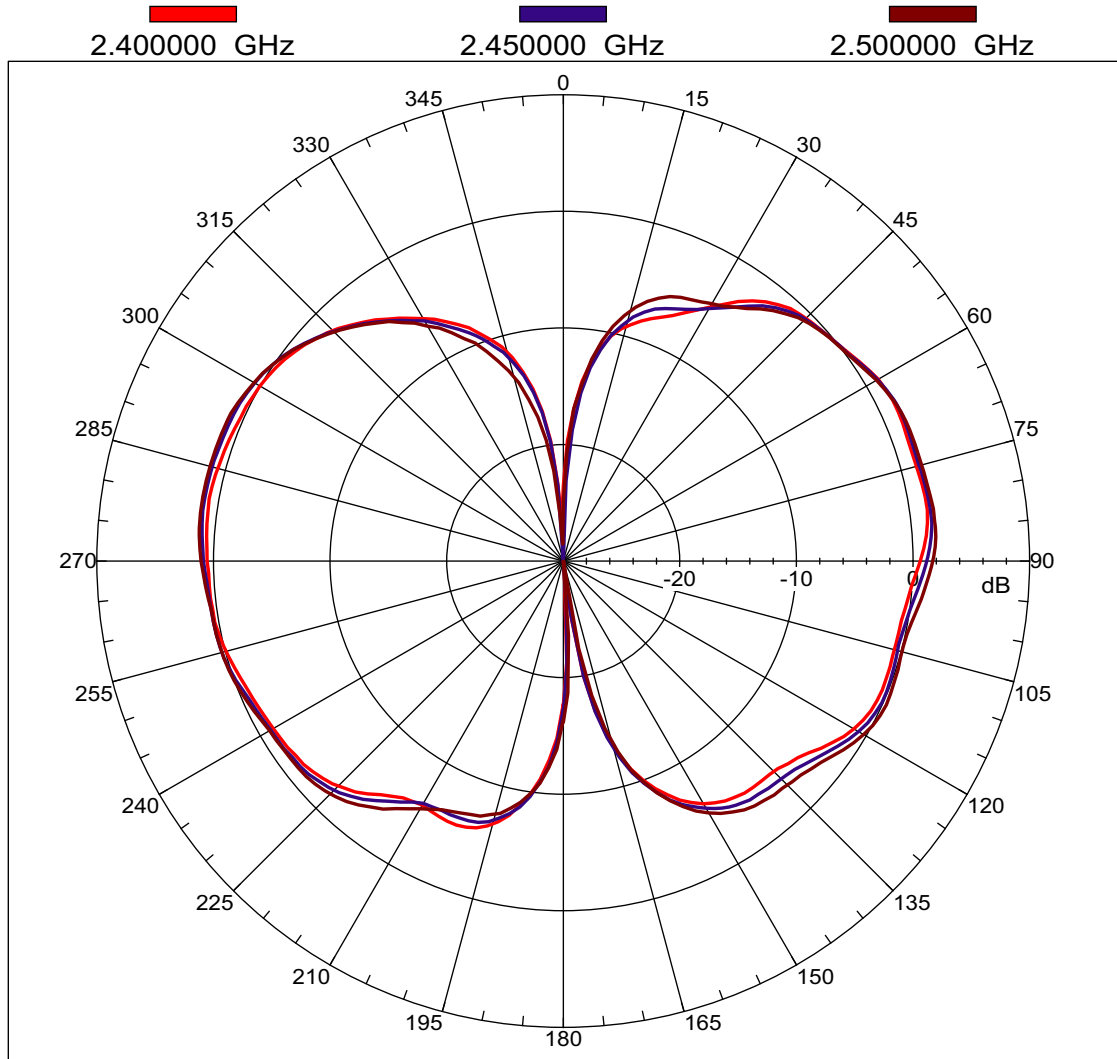

6/6/2006

Far-field amplitude of C037-510734-A-V.nsi

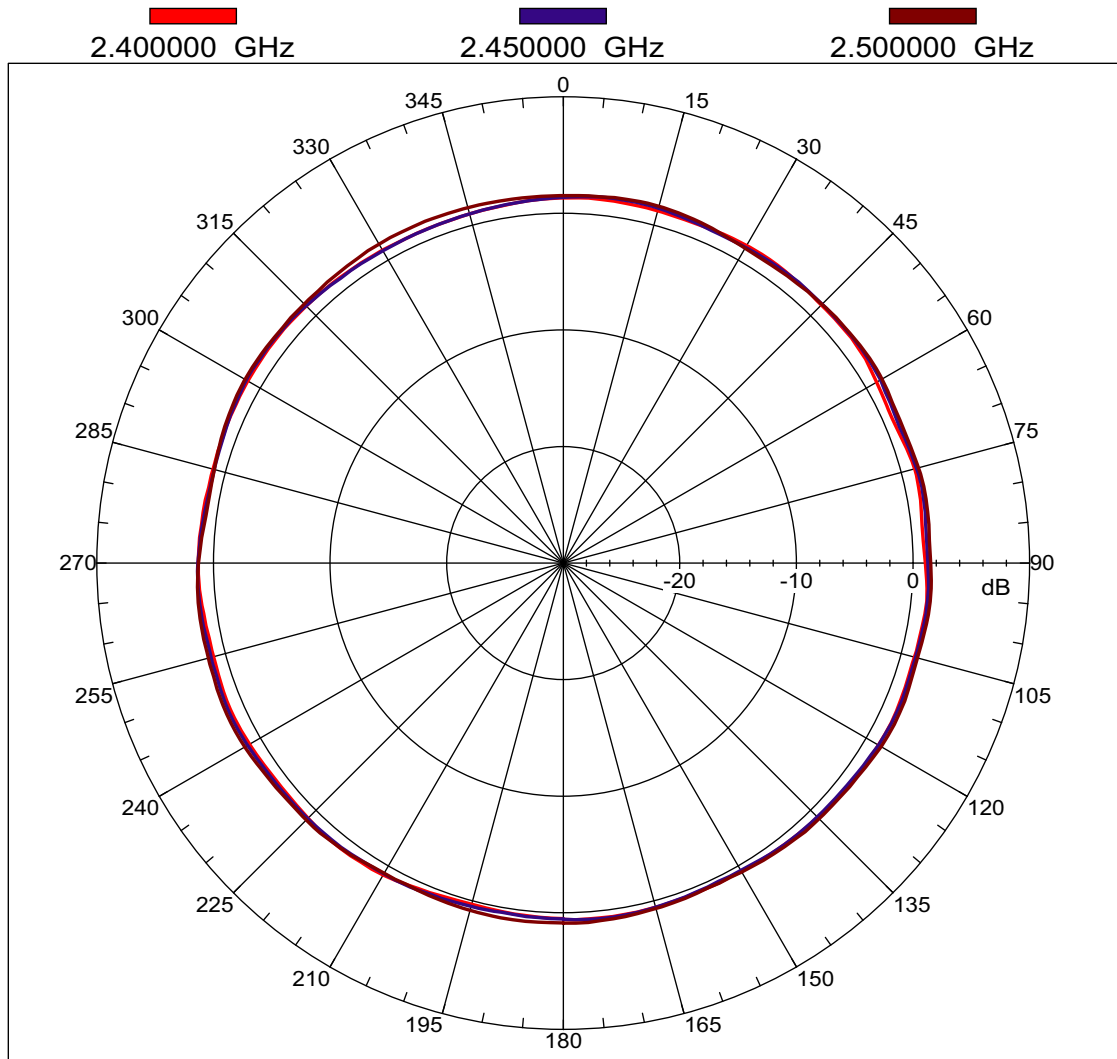

6/6/2006