


CANT-0031 Multi-Band Directional Indoor Window Mounted Signal Antenna

The CANT-0031 multi-band indoor mounted signal antenna is a high gain directional antenna supporting both cellular, AWS, and PCS frequency bands. The CANT-0031 is a directional antenna and will transmit and receive signals to network towers in the transmission path. The CANT-0031 has an f female connection that is compatible with the RG-6 cabling provided by the Zboost product.

For best performance, the antenna should be mounted on the highest point available on the window. Avoid mounting the antenna within 6" of any metal window framework.

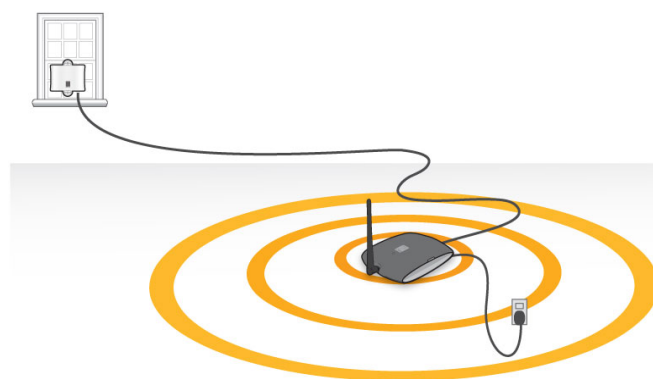

CANT-0031 Specifications

Directional Window Mounted Signal Antenna

Frequency	824-960 MHz	1710-2170 MHz
Gain	3 dBi	5 dBi
Beam width	72 degree	60 degree
VSWR	<= 1.5 : 1	
Connector	Type F Female	
Impedance	75 Ohm	
Supported transfer protocols	GSM, CDMA, GPRS, EDGE, EV-DO, HSPA+	
Dimensions	7" x 5.5" x 2.25"	
Weight	11 oz	