


# **BTK-901 Dual Microphones Bluetooth Headset User Manual**

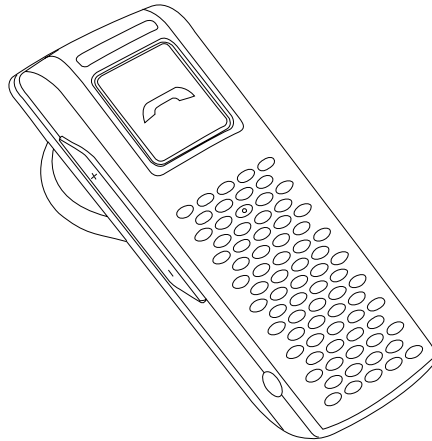

**Thank you for purchasing the Dual Microphone Bluetooth Headset BTK-901, we hope you will be delighted with its operation.**

Know more about your BTK-901 Headset

The dual Microphone Headset BTK-901 adopts revolutionary Voice Isolation Technology. Built-in dual microphones array technology which produces world class noise suppression and echo cancellation, with zero voice distortion. It separates the desired voice signal from background signals enabling crystal clear communication in the noisiest of environments. Therefore, BTK-901 user does not need to speak louder and can always keep talking elegantly.

**Please read this user's guide to get started to make the best use of the headset's many features.**

## **Driving safety**


- 1. When you are driving a car, driving is your first responsibility.**
- 2. When using your headset while driving, follow local regulations in the country or region you are in.**

## **BEFORE USING YOUR HEADSET**

### **Checking phone compatibility**

**Your headset is compatible with most Bluetooth phones that are compliant with Bluetooth version V2.1 + EDR and support the headset and/or hands- free profile(s). Ensure that your phone has Bluetooth capability by visiting your phone manufacturer's web Site.**

## Your headset overview

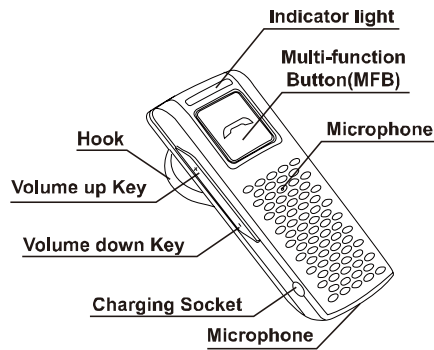


## Checking the accessories

Make sure you have the following items with your headset: Travel adapter, Manual, Ear-hook.

## Charging the headset

Your headset uses a rechargeable battery. You must charge the battery fully before using the headset for the first time.

1. Plug the travel charger into an AC socket.
2. Connect the charger with headset as shown on the picture. The blue indicator of headset will turn on when charging.
3. When the battery is fully charged, the blue indicator of the headset will be off.

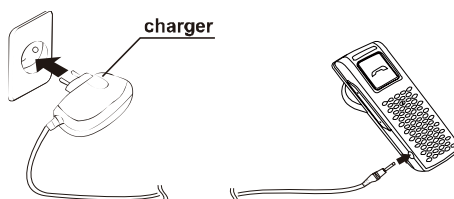

- 1) Depending on your country, the travel adapter may appear different from the above illustration.
- 2) **When the headset is in low battery, you will hear 5 beeps every 10seconds.**
- 3) The headset will be fully charged in approximately 1.5-3 hours.
- 4 Remove the travel adapter from the AC socket.

**WARNING:** Do not attempt to charge the headset with anything other than the travel adapter provided. Using unauthorized travel adapter may damage the headset.

**IMPORTANT:** The headset cannot be used while charging.

## BASIC OPERATIONS

### Turning headset on/off

#### 1. Turning the headset on

Press and hold MFB Button for about **3** seconds, the blue indicator of the headset will flash 2 times rapidly. The headset is now turned on.

#### 2. Turning the headset off

Press and hold MFB Button for about 3 seconds, the indicator will be on **blue** for 2s. Then the headset is off.

3. When the headset is low battery, it will quickly beep 5 times every 10 seconds. Please charge the headset.

### Pairing

Pairing will create a unique and encrypted wireless link between two Bluetooth enabled devices, such as your Bluetooth phone and Bluetooth headset.

1. Ensure that the headset is off (*see Turning headset on/off* section).

2. Press and hold the MFB Button for about 5 seconds and the indicator be on blue stillness.

3. Set your Bluetooth phone to discover the headset by following your phone's guide. Typically, the steps involve going to a 'Setup', 'Connect', or 'Bluetooth' menu on your phone and then selecting the option to discover Bluetooth devices.

4. Your phone will find the "BTK-901" headset and ask if you want to pair with it. Confirm this by pressing the "Yes" or "OK" key.

5. Enter a passkey or PIN code "0000" (4 zeros), then press the "Yes" or "OK" key.

6. Once the headset successfully connected with mobile phone, the indicator will flashes 1 time every 7 seconds. Otherwise, the indicator will flash blue 2 times every 5 seconds.

**IMPORTANT:** If the pairing can't be completed within 120 seconds while the pairing mode is activated, that meant the pairing was unsuccessful, please repeat Step 1 to Step 5 to pair the headset and the mobile phone again.

## **Pairing Your Headset with Two Mobile Phones (Multipoint connecting)**

**BTK-901 supports a Multipoint function to allow simultaneous pairing with two mobile phones.**

- 1. Follow the pairing procedure as instructed in “Pairing” section to pair the headset with the first mobile phone.**
- 2. Turn off the headset.**
- 3. Repeat the same pairing procedure on the second mobile phone.**
- 4. On the first mobile phone’s menu, active its Bluetooth connection with the headset.**

**Notes: If the headset connected with two mobile phones, when there is a call in or call out on one phone, the other phone will be disconnected with the headset. Once the call is off, the headset will connect with the mobile phone automatically**

## **Wearing the headset**

**Wear the headset on your ear. In general, you will get better performance when there are no obstructions (including parts of your body) between the headset and the phone. Depending on what ear you are going to wear the headset, simply adjust the ear-hook accordingly.**

## **Making a call**

**Using the phone’s keypad**

- 1. Dial number on the keypad or select the contact name from the contact list from your mobile phone.**
- 2. Press phone’s “send/call” key.**

**Noise Killing: This headset has built in with dual Microphones, which fulfill the noise killing function. The headset can provide you the clean and clear sound, wherever you are.**

## **Voice Dialing**

**Please ensure your mobile phone supports voice dialing function and the voice tag assigned for this feature.**

- 1. Shortly press MFB Button once.**
- 2. You’ll then hear the voice-activation tone, say the name of the person you wish to call.**

3. Short press MFB Button to stop the voice dialing.

**Note: For the mobile phone which don't support voice dialing function, shortly press the K1 button once will redial the last number.**

**Connected with one mobile phone: This feature will be available on only one mobile phone, typically, it will active the latest mobile phone which you have answered or maken a call**

## Ending a call

1. Shortly press MFB Button once during a call
2. End call from phone's keypad

## Answering a call

1. Press the MFB button briefly, when you receiving an incoming call.
2. Answer the call via your phone's keypad. You may then need to transfer the call to the headset by pressing the **Volume up Key** for 2seconds (depending on your phone).

## Last number redial

**Connected with one mobile phone: Shortly press MFB Button twice to make the last number redial.**

**Connected with one mobile phone: This feature will be available on only one mobile phone, typically, it will active the latest mobile phone which you have answered or maken a call**

## Rejecting an incoming call

Press and hold Volume up Key for 2 seconds to reject the call.

## Adjusting the volume

Press Volume up **Key** to increase the volume level

Press Volume down **Key** to decrease the volume level.

## Transferring a call

**Headset to phone: Press Volume up Button for 2 seconds, when you hear a melody, release it.**

**Phone to Headset: Press Volume up Button for 2 seconds, when you hear a melody, release it.**

**Note: For different mobile phone setting, you could only transfer a call by press the mobile phone's keypad**

## Muting the Microphone

You can put a call on hold by muting the microphone.

**To turn off the Muting Microphone: Shortly Press and hold the volume up and down key. Synchronously, you will hear 1 mute.**

To turn on the Muting Microphone: Shortly Press and hold the volume up and down key. you will hear 1 mute. The earphone will beep twice every 3seconds

## Storage of the headset

- 1. Always store the headset with the power off and make sure it is safely protected.**
- 2. Avoid storage at high temperatures (above 60°C) such as in a hot vehicle or in direct sunlight. (Storage at high temperatures can damage performance and reduces battery life).**
- 3. Do not expose the headset or any of its supplied parts to rain or other liquids.**

## Product Specifications

- Bluetooth Version 2.1 + EDR, Class II
- Support Headset and Handsfree profiles
- Dual microphones technology for pure speech
- **Multipoint Profile: Connect with two Bluetooth devices at the same time**
- Noise Elimination
- Voice Separation Technology
- Wind noise reduction
- Simple easy pairing & power consumption saving
- Compatible with all Bluetooth enabled devices
- Talk time up to 5~6 hours\*
- Standby time up to 80~110 hours\*
- Range up to 30 feet (10 meters )
- Dimensions (L X W X T): 56 X 18 X 10 (mm)
- Weight: 10 g (excluding accessories )

**\*Depending on the phone type and usage, the actual time may vary.**

**This device complies with Part 15 of the FCC Rules.**

**Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

**FCC NOTE:**

**THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.**

## **Correct disposal of this product**



**(Waste Electrical & Electronic Equipment) This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life.**

**To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.**

**Bluetooth® is a trademark owned by Bluetooth SIG, Inc.**