

Bluetooth Headset



User Manual

U & ITM
Colorful Life

Item No.:U&I-03

User Manual


Specifications	1
Headset Features	2
Ear Hook Mode	2
Earcap Mode	3
Charging Headset	4
Replacing Faceplate	5
How to Take off the Faceplate	5
How to Put the Faceplate	6
How to Put Earcap and Ear Hook	7
Wearing Headset	8
Wearing Your Headset	8
Changing for Wearing on the Ear(method 1)	9
Changing for Wearing on the Ear(method 2)	10
Paring Headset	11
Paring Your Headset and Phone	11
Function Statement	12
Function Statement under Paring Mode	12
Using the Headset Indicator LED	13
FCC Warning	14

Specifications

Bluetooth Version:	1.2
Operation Range:	Up to 10 Meters (33 feet)
Frequency:	2.402GHZ-2.480GHZ ISM Band
Connection:	Point to Point
Dimension:	L58mm, W23mm, H20mm
Weight:	12g
	-
Security:	128 bits encryption
Battery:	3.7V 150mA Li-polymer battery
Talking Time:	Up to 8 hours
Standby Time:	Up to 10 days
Operating Temperature:	-10~55°C
Storage Temperature:	-20~60°C
Headset Passkey:	0000


Headset Features

Ear Hook Mode

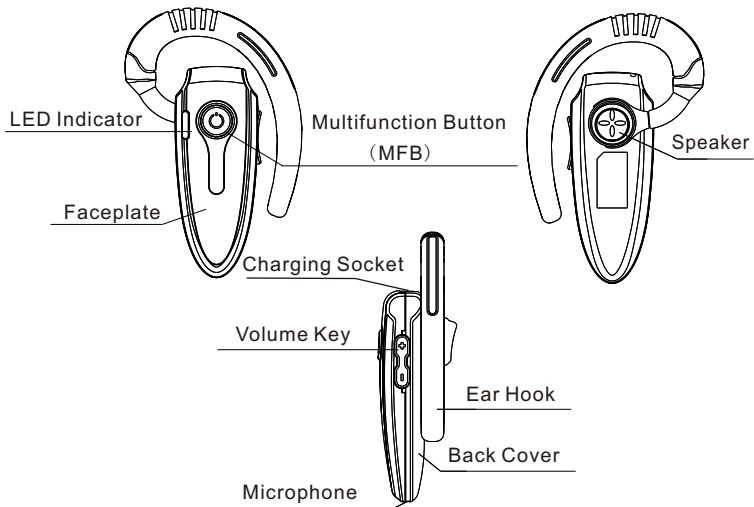

Headset Features


Earcap Mode

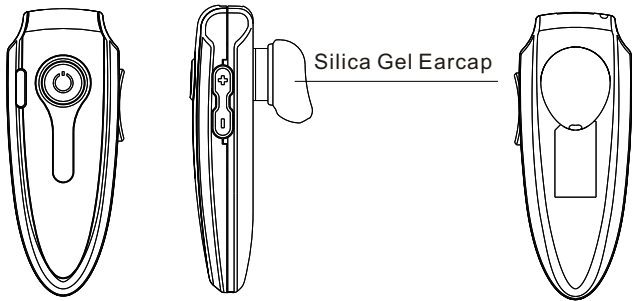

Charging Headset

Charging your Headset

1. Plug USB adaptor to the computer socket , and make the USB charger connect with the headset.
2. When charging, LED flashes constantly in red color. The LED will turn off automatically once the battery is full.
3. Normally, charging time will be 2~3 hours. Talking time is up to 8 hours / Standby time is up to 240 hours after being fully charged.

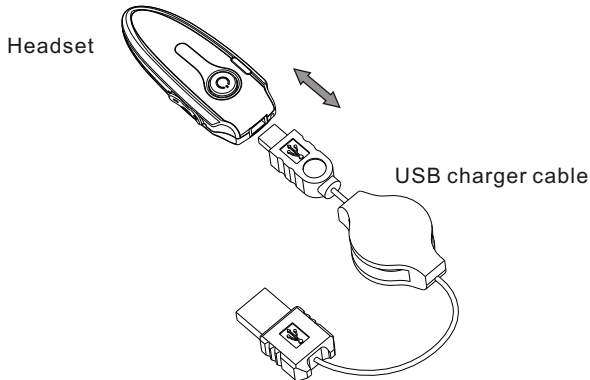

Replacing Faceplate

How to take off the headset faceplate:

(Pls refer to the following pictures showed.)

Fig.A: Loose the faceplate from the top joint.

Fig.B: Draw out the faceplate.




Fig.A






Fig.B



Replacing Faceplate

Put the Faceplate Step:

(Pls refer to the following pictures showed.)

Fig.A: Put the faceplate in the right place of the headset.

Fig.B: Fasten the faceplate into the headset board.

Fig.C: Completion.




Fig.A




Fig.B






Fig.C

How to Put Earcap and Ear Hook

Pls refer to the following pictures showed:



Earcap Mode

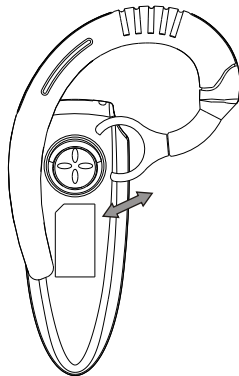


Ear Hook Mode

Wearing Your Headset

When packaged, the headset is originally set to wear on the right ear. And the ear hook can be adjusted to suit the different ear size and make you feel comfortable.

Warning: Make sure not to distort the ear hook always for a long time with large extent while adjusting the hook, otherwise may damage the ear hook.

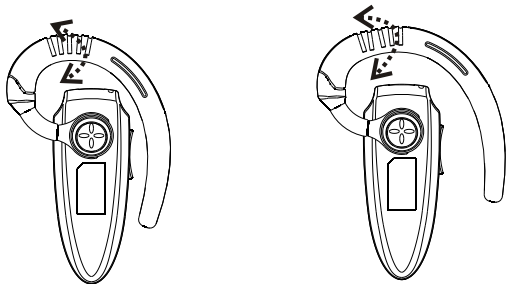

In order to get the best function, please put the headset and the phone on the same side of your body, as the function is always the best without any obstruction (including part of your body) between the headset and the phone.

Wearing Your Headset

Changing for Wearing on the Left and the Right Ear: (Method 1)
Take off the hook, then change the direction and set it up. Please refer to the following pictures showed:

Fig A: Wearing on the Right Ear.

Fig B: Take off the Hook.

Fig C: Change the Direction and Set it up.

Fig D: Wearing on the Left Ear.




Fig.A




Fig.B




Fig.C




Fig.D

Wearing Your Headset

Changing for Wearing on the Left Ear and Right Ear: (Method 2)
Turn the hook to the symmetrical position, and then turn to the degree that showed in Fig.C.

Fig.A: Wearing on the right ear.

Fig.B: Turn the hook to the symmetrical position.

Fig.C: Turn the hook to the degree showed in the picture, which is for wearing on the left ear.




Fig.A




Fig.B




Fig.C

Pairing Your Headset

Pairing Your Headset and phone

Note: You must pair your headset and phone before you make a call. “Pairing” creates a link between devices with Bluetooth wireless technology and allows the phone to remember the headset's unique ID. When your headset and phone are paired, your headset automatically connects to your phone.

Pairing

Put the headset and phone close together:

Step:

1)With the headset on, hold the Volume “+ ” Button for 2 seconds until LED flash red and blue color in turn.

2) Perform a device discovery from the phone.

- For details on device discovery for your phone, refer to the phone's user's guide.

- When the scan is completed, the phone displays the device found.

3)Select the U&I-03 from the discovered devices list and confirm following the screen prompts.

4)When prompted by the phone, enter the passkey 0000 and confirm to pair the headset with the phone. (The device ID is now stored in the phone's memory. Pairing is successful when the headset indicator flashes rapidly.)

Function Statement

With the headset and phone are paired:

- 1) Turning on the Headset: Press the MFB button until LED flashes blue color.
- 2) Answering a Call: When a call comes, press the MFB button to answer a call.
- 3) Ending a Call: Press the MFB button to end the call.
- 4) Making a Voice Dial Call: Shortly press MFB button, speak the name to make the voice dial call.
- 5) Redialing a Call: Long press Volume “ - ” button until you hear the beep, then release the button to redial out a call.
- 6) Rejecting a Call: Long press the MFB button until you hear the beep, then release the button to reject the call.
- 7) Adjusting Headset Volume:

To increase speaker volume, repeatedly press “+” button until you reach the desired volume level.

To decrease speaker volume, repeatedly press “-” button until you reach the desired volume level.

Notice for Making and Receiving Calls:

1. Your headset supports both handsfree and headset profiles. Accessing call functions depends on which profile your phone supports.
2. If the link abnormally disconnects (for examples, out of range or phone power off), the headset tries to reestablish the link. If the disconnection is over 20 minutes, the headset will turn off automatically, you just turn on the headset again and make the connection for the call will be fine.

Function Statement

Using the Headset Indicator LED

Headset Indicator LED	Status
Blue flashing	Standby mode before pairing
Red and blue flashing in turn	Pairing mode
Blue flashing for continued 3 times	Standby after successful pairing
Blue flashing for continued 4 times	Connected (on a call)
Red flashing	Indicating low battery

FCC Warning

CAUTION:

Changes or modifications to this unit not expressly approved by the party responsible for compliance will void the user's authority to operate the equipment. Any change to the equipment will void FCC grant.

NOTE:

This equipment has been tested and found to comply with the limits for a digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.