

# *Bluetooth Hands-free BHF2000S*

**Model Name: BHF2000S**

User Manual ver 1.0

# Contents


|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. OVER VIEW .....</b>                              | <b>3</b>  |
| 1.1 ABOUT YOUR DEVICE.....                             | 3         |
| 1.2 Specifications.....                                |           |
| 1.3 Box Contents .....                                 | 4         |
| <b>2. GETTING STARTED.....</b>                         | <b>5</b>  |
| 2.1 CHARGE YOUR DEVICE .....                           | 5         |
| 2.2 TURING YOUR DEVICE ON AND OFF .....                | 6         |
| 2.3 PAIRING DEVICE WITH YOUR PHONE .....               | 7         |
| 2.4 CONNECTING WITH YOUR PHONE .....                   | 8         |
| <b>3. PLACE THE BHF2000S IN YOUR CAR .....</b>         | <b>8</b>  |
| <b>4. HOW TO .....</b>                                 | <b>8</b>  |
| 4.1 Switch proximity(Gesture sensing)/touch mode ..... | 8         |
| 4.2 Answer/End a call .....                            | 9         |
| 4.3 Make a call .....                                  | 9         |
| 4.4 Volume control .....                               | 9         |
| 4.5 Mute on/off.....                                   | 11        |
| 4.6 Transfer call .....                                | 12        |
| 4.7 Play music* .....                                  | 12        |
| 4.8 Setting.....                                       | 12        |
| <b>5. ADDITIONAL FEATURES .....</b>                    | <b>13</b> |
| 5.1 Using your DEVICE with TWO mobile devices .....    | 13        |
| 5.2 FM transmit.....                                   | 14        |
| 5.3 Download phonebook and caller ID* .....            | 14        |
| 5.4 Voice Trigger.....                                 | 12        |
| 5.5 Firmware upgrade .....                             | 12        |
| <b>6. VOICE COMMAND.....</b>                           | <b>15</b> |
| <b>7. TROUBLESHOOTING &amp; FAQ.....</b>               | <b>17</b> |
| <b>8. FOR MORE HELP .....</b>                          | <b>19</b> |
| <b>9. SAFETY and GENERAL INFORMATION .....</b>         | <b>19</b> |
| <b>10. CERTIFICATION and SAFETY APPROVALS .....</b>    | <b>19</b> |
| <b>11. WARRANTY .....</b>                              | <b>19</b> |

**!NOTE:** Before using your new DEVICE, charge and pair it with your selected Bluetooth wireless technology enabled device.

## 1. OVER VIEW

BHF2000S, a sleek style Bluetooth hands-free car kit, realizes a true definition of 'Bluetooth wireless hands-free'. Its features such as Voice, Sensing, Solar, make it unnecessary for users to physically touch the unit.

### 1.1 ABOUT BHF2000S

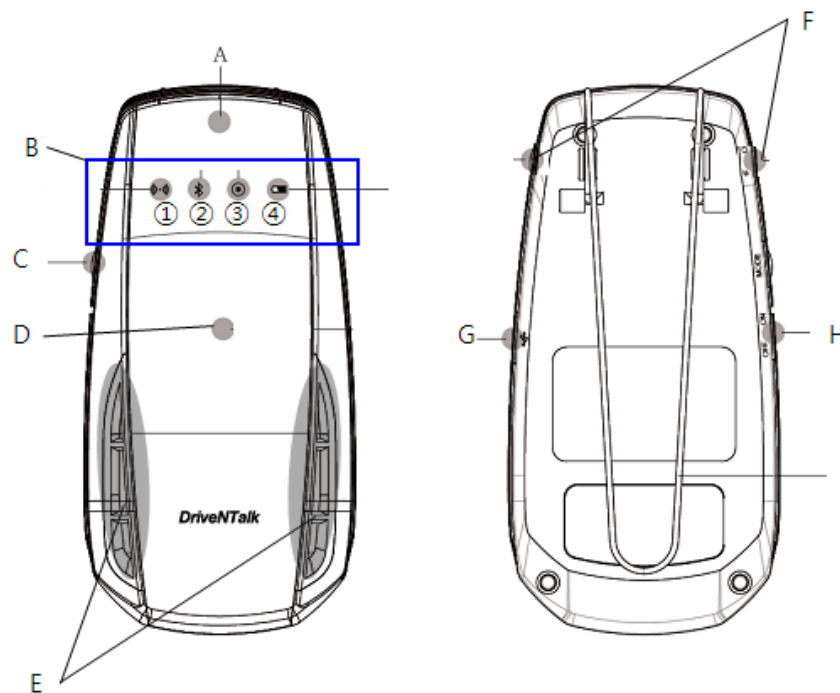

- |                                |                     |
|--------------------------------|---------------------|
| A. MFB (Multi Function Button) | D. Solar panel      |
| B. LED Indicator               | E. Speaker          |
| ① FM status icon               | F. <u>Mic</u>       |
| ② Connection status icon       | G. Charging port    |
| ③ Touch sensor key pad icon    | H. Power switch     |
| ④ Battery status icon          | I. Visor clip mount |
| C. Mode Button                 |                     |

#### WHAT THE LIGHTS MEAN

| LED Indicator              |                         | BHF2000S Status      |
|----------------------------|-------------------------|----------------------|
| Connection status icon     | Flashes rapidly         | Pairing mode         |
|                            | Solid blue              | Connected            |
|                            | Flashes every 2 seconds | Standby/Idle         |
| Touch/Gesture sensing mode | Solid blue              | Touch mode           |
|                            | Off                     | Gesture sensing mode |
| FM status icon             | Solid red               | FM mode              |
|                            |                         |                      |
| Battery status icon        | Flashes every 3 second  | Low battery          |

## 1.2 Box Contents

|                              |           |                |             |             |
|------------------------------|-----------|----------------|-------------|-------------|
| Bluetooth hands-free Car Kit | USB Cable | Sun visor clip | Car charger | User Manual |
|------------------------------|-----------|----------------|-------------|-------------|

## 2. GETTING STARTED

You should follow three steps before using your DEVICE, BHF2000S:

1. **Charge your DEVICE.**
2. **Activate Bluetooth function on your mobile phone (refer to the manual for your mobile phone)**
3. **Pair your DEVICE to your mobile phone.**

The buttons on the DEVICE perform different functions depending on how long you press it.

| Instruction     | Duration of press                                              |
|-----------------|----------------------------------------------------------------|
| Tap             | Press briefly (0~1.5 sec)                                      |
| Double Tap      | 2 quickly repeated taps<br>(max 0.5 sec interval between taps) |
| Press           | Approx. 1.5~3.0 seconds (1 beep)                               |
| Long Press      | Approx. 3~5 seconds (2 beeps)                                  |
| Very long Press | More than 5 seconds                                            |

### 2.1 CHARGING YOUR DEVICE

Make sure that your DEVICE is fully charged for two hours before you start using it.


#### 1) Solar Recharging



Sun visor installation: Flip the sun visor toward the sun when you get out of your vehicle.

#### 2) USB Charging


Use the USB cable to connect the DEVICE to the car charger. Plug the car charger into your car's power outlet. The Battery status icon will light up red while charging. When fully charged the Battery status icon will turn green. It takes approximately 2 hours 30 minutes to fully recharge the DEVICE.

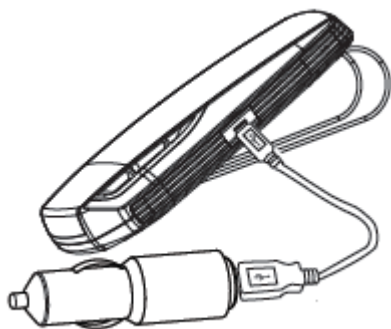

Do not use chargers from any other devices as this may damage your DEVICE.

※When the DEVICE battery is low, Battery status icon on the DEVICE will blink, indicating that it needs to be recharged.

## 2.2 TURNING YOUR DEVICE ON AND OFF

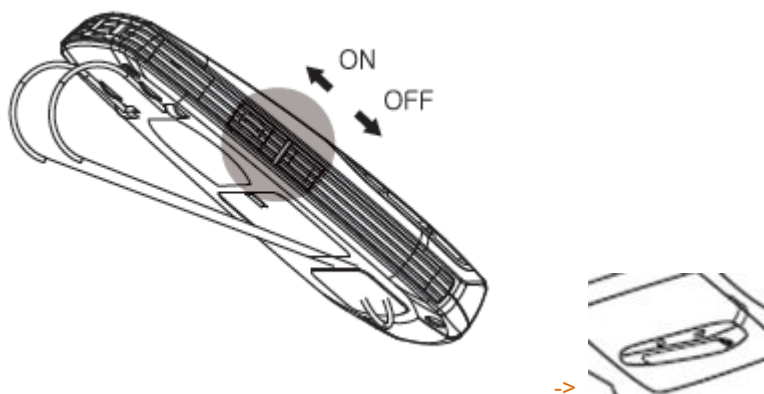

### !NOTE:

When disconnected from your mobile phone, The DEVICE will automatically turn into sleep mode after 1 minutes. Or you can turn off the power switch manually when not using the DEVICE. Coming back into your vehicle, with impact from closing your vehicle door, the DEVICE will

automatically turn on if the DEVICE power switch is on.

## 2.3 PAIRING THE DEVICE WITH YOUR MOBILE PHONE

Speakerphones are connected to mobile phones using a procedure called 'pairing'. By following a few simple steps, a phone can be paired with a speakerphone in a matter of minutes.

### 1. a) **First time pairing:**

When you turn on your DEVICE for first time, it will be in pairing mode.

### B) **Enter pairing mode:**

Turn the DEVICE on.

- 1) Press and hold the MFB until you hear the announcement "Pair mode" and the Connection status icon will begin to flash.
- 2) Tap the MFB or say "Hello, DriveNTalk (drive and talk)" when the voice trigger is on. When you hear "Say a command" announcement, say "Pair mode." Then, the Connection status icon will begin to flash.




2. Activate Bluetooth function on your mobile phone. Then set your mobile phone to search for Bluetooth enabled devices and select 'BHF2000S' on the list.
3. Press 'OK' on the phone and if you are asked for a PIN code, enter the PIN code '0000' (4 zeros).

### **!Note:**

Latest mobile phones such as smartphones may not ask to enter PIN code and connect

automatically.

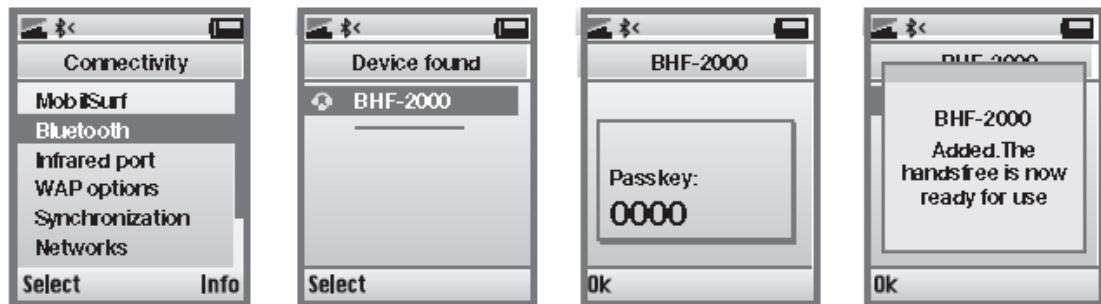

## 2.4 CONNECTING WITH YOUR MOBILE PHONE

Once the DEVICE and phone have been paired, they will automatically connect when the DEVICE is on and Bluetooth is activated on your mobile phone. The DEVICE can be used when it is “connected” to the phone. The DEVICES are paired, but if not immediately connected, tap the MFB.

## 3. PLACE THE DEVICE IN YOUR CAR

The DEVICE sits discreetly and conveniently on the sun visor using the attached clip. For optimal sound quality, place the DEVICE right in front of you and speak directly to the DEVICE.



<

## 4. HOW TO

### 4.1 Switch Gesture sensing /Touch mode

Default is touch mode. The Touch sensor key pad icon will be turned on when Touch mode. In order to switch gesture sensing mode, press the MFB and the Mode button together for 3 seconds. You will hear the announcement “Gesture sensing mode”, and it will change mode. The DEVICE will remember its last setting mode when turning back on.

## 4.2 Answering/Ending a call

**Answer a call:** Tap the MFB on your DEVICE to answer a call.

**End a call:** Press the MFB on your DEVICE to end an active call.

## 4.3 Making a call

### Using your mobile phone

Call will automatically transfer to your DEVICE\*. If it does not, please press and hold the MFB for 5 seconds on the DEVICE.

### Via your DEVICE

You can place a call with the DEVICE in following ways:

#### 1) Call favorite

Tap the MFB or say “Hello, DriveNTalk” when the voice trigger is on. When ‘Say a command’ message is heard, say any Call favorite. You can choose amongst 7 Call favorites ‘Call home, call office, Call favorite 1~5’. The DEVICE will dial the number saved on each Call favorite numbers.

**NOTE** Refer to ‘4.8 Setting’. You can save numbers you want on each call favorite numbers.

#### 2) Redial last number

##### • With the DEVICE

Press and hold the MFB for 3 seconds When the DEVICE is connected to your mobile phone.

##### • Using Voice Command

Tap the MFB or say “Hello, DriveNTalk” when voice trigger is on. When ‘Say a command’ is heard, say ‘Redial’. The DEVICE will redial the last outgoing number.


## 4.4 Volume control

### 4.4.1 Volume Up

1. Slide your finger to the right on the touchpad.




2. You can volume up by using gesture sensing. Move your hand to the right way in front of the DEVICE.

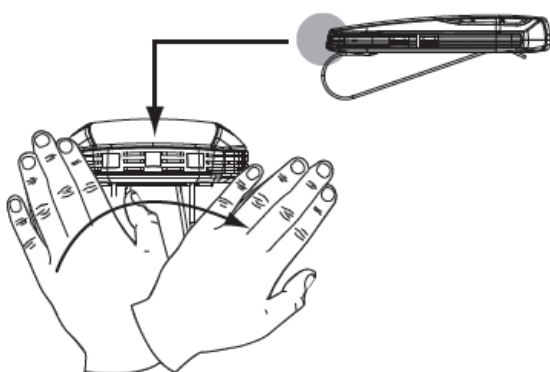


#### 4.4.2 Volume Down

1. Slide your finger to the left on the touchpad.

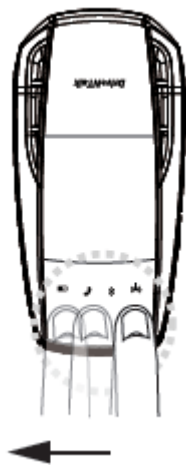

2. You can volume down by using gesture sensing. Move your hand to the left way in front of the DEVICE.

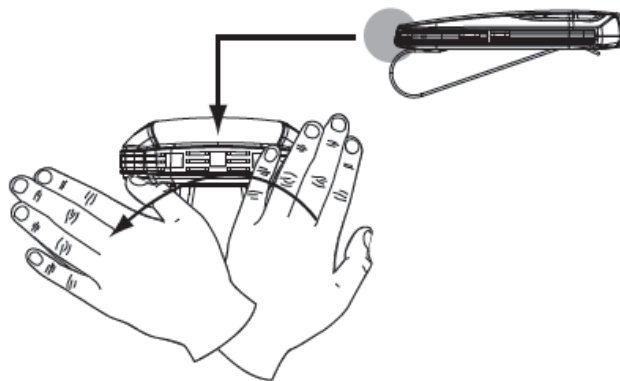

**!NOTE:** For smooth gesture sensing operation, keep 3cm distance from the DEVICE to your finger



**!NOTE:** In FM mode, volume adjustment only controlled by your vehicle's stereo.

## 4.5 Mute on/off

Double tap the Mode button to mute your microphone and again to turn mute off. The mute beep tone will be heard every 5 seconds.

## 4.6 Transfer call

- 1) Press and hold the MFB until you hear two beeps to transfer a call from the DEVICE to the mobile phone.
- 2) Press and hold the MFB until you hear two beeps to transfer a call from the mobile phone to the DEVICE.

## 4.7 Play music\*

If your mobile phone supports A2DP audio streaming then you can transfer music from your mobile phone to the DEVICE. Music streaming can be controlled from your mobile phone.

## 4.8 Setting

### Entering Setting Menu

1. Tap the MFB or say "Hello, DriveNTalk" when the voice trigger is on.
2. After 'Say a command' message is heard, say 'Settings menu'.
3. The DEVICE will announce 'Settings menu, you can say incoming call announcement, save favorite or cancel'. Say what you want to do or cancel to exit setting.

### Incoming Call Announcement

Enable or disable incoming call announcement at Settings Menu.

1. Say 'Incoming call announcement'.
2. According to the current setting, the DEVICE will announce ,  
'The incoming call announcement is on. Do you want to turn it off?'  
or 'The incoming call announcement is off. Do you want to turn it on?'
3. Say 'yes' or 'no'.
4. According to your answer, the DEVICE will announce 'The incoming call announcement is on' or 'The incoming call announcement is off' and exit setting.

## How to save Call Favorite

- Under settings menu, you can save a phone number on the DEVICE.
  1. Say 'Save favorite'.
  2. The DEVICE will announce ,  
'A phone number can be saved as a favorite after you have received an incoming call from X-X-X-X-X'.  
'Tell which favorite you want me to save it as.'  
'You can say, Call Home, Call Office, Call Favorite followed by number 1 to 5 or cancel'.
  3. Say what you want to save or cancel to exit setting.
  4. If you say 'Call home', the DEVICE will announce 'Phone number saved as call home' and 'Is that right?' for your confirmation.
  5. If you say 'yes', the DEVICE will announce 'Phone number saved' and exit setting. If you say 'no', the DEVICE exit settings without saving.

- Quick Voice Dial Editor

Visit DriveNTalk website ([www.driventalks.com](http://www.driventalks.com)) and download Quick Voice Dial Editor from 'Support & Download' menu. You can manually pre-install numbers of 'Favorite 1~5', 'Office', 'Home' and service numbers of 'Call Information' and 'Text Message'.

### **Note**

This program can only run in Microsoft Windows XP and Windows Vista, Windows 7 (32bit).

## 5. ADDITIONAL FEATURES

---

### 5.1 Using your DEVICE with TWO mobile devices

The DEVICE is capable of having two mobile phones (either Bluetooth devices) connected to the DEVICE at the same time. This will give you the freedom of having only one DEVICE to operate both of your mobile phones. Please note that Last Number Redial will call numbers from the primary phone (last connected phone).

If the DEVICE is connected to two phones, please note that the music will play from the

primary phone(last connected AVRC profile).

## 5.2 FM transmitter

You can transmit calls and music from your mobile phone to your vehicle's stereo using the DEVICE. Press and hold the Mode button for 5 sec and set your radio to the announced frequency.

If you need to change frequency, slide your finger to the right/left on the touch keypad. For scanning frequency, press the mode button for 3 sec. The FM transmit will automatically turn off after 1 minutes if the function is not used.

## 5.3 Download phonebook and caller ID\*

The DEVICE supports PBAP function; you can download your contacts to the DEVICE up to 2,000 contacts. The first time you connect your DEVICE to your mobile phone, your contacts will be transferred automatically to the DEVICE.

**!NOTE:** BHF2000S support multi-point function, the DEVICE can save up to 1,000 contacts per connected phone.

If you add contacts to your mobile phone and need to update your downloaded phonebook, you can start manual update by very long press on the Mode button when the DEVICE is turned on and connected to your mobile phone.

## 5.4 Voice Trigger

You can simply activate the DEVICE by saying 'Hello DriveNTalk(drive and talk)' To activate the voice trigger mode on/off, tap the mode button. Battery standby time is about 65hours when the voice trigger is on, about 270 hours when the voice trigger is off.

## 5.5 Firmware upgrade

Download latest firmware and user guide from 'www.driventalks.com', refer to Technical Support if required. Once latest firmware is downloaded to your PC,

use our USB cable to download to your DEVICE. For firmware download mode, turn your DEVICE on as pressing the Mode button.

**!Note**

This program can only run in Microsoft Windows XP and Windows Vista, Windows 7 (32bit).

## 6. VOICE COMMAND

---

You can simply activate voice command mode by saying 'Hello DriveNTalk(drive and talk)' and the DEVICE will be ready to receive your voice commands.

You can use "What can I say" command to listen to available commands. Following is the list of the available commands.

| Voice commands    | Proceed this way                                           |
|-------------------|------------------------------------------------------------|
| What Can I Say?   | Tell you all available commands                            |
| Pair Mode         | Enter the pairing mode                                     |
| Am I Connected?   | Tell you if connected to a phone                           |
| Phone Command     | Enter voice recognition function (if mobile phone support) |
| Redial            | Dial the last dialed number                                |
| Call Information  | Connect to Microsoft's Bing Search Center <sup>1)</sup>    |
| Call Favorite 1~5 | Call number preset as 'Call favorites 1~5' <sup>2)</sup>   |
| Call Office       | Call number preset as 'Call Office'                        |
| Call Home         | Call number preset as 'Call Home'                          |
| Text Message      | Connect to voice to text services <sup>3)</sup>            |
| Settings Menu     | Enter to settings menu                                     |
| Cancel            | Cancel the commands                                        |
| Yes               | Answer "yes" for yes/no question                           |
| No                | Answer "no" for yes/no question                            |

|               |                          |
|---------------|--------------------------|
| Answer        | Answer the incoming call |
| Check Battery | Check the battery status |
| Ignore        | Reject the incoming call |

1) Bing will only provide US based information. If you are calling outside of US, long distance charges may apply.

2) Say "Settings menu" to save the last incoming call number, or download 'Quick oice Dial Editor' for easy storing at [www.driventalks.com](http://www.driventalks.com). If there is no last incoming call, or you do not set the numbers, it will not activate.

3) To use this service, you need to register voucher code at [www.driventalks.com](http://www.driventalks.com) , "Voice to Text, Dial2Do". Please read section 5 'Special features to access services in USA / Canada' and check the service number before you using.

\* Phone dependant

## 7. Specifications

|                         |                                         |
|-------------------------|-----------------------------------------|
| <b>Bluetooth</b>        | V 2.1 / EDR compliant                   |
| <b>RF Power</b>         | Class 2                                 |
| <b>Profile</b>          | HFP, HSP, PBAP, A2DP                    |
| <b>Acoustic Quality</b> | Noise suppression / Echo cancellation   |
|                         | Dual Mic. (Broadside)                   |
| <b>Advanced UI</b>      | Voice Command, TTS, Voice prompt        |
|                         | Gesture Sensing / Touch sensor keypad   |
|                         | G sensor: Auto power-on & re-connecting |
| <b>FM Transmitter</b>   | ✓                                       |
| <b>Power</b>            | Solar recharging, Li-poly battery       |
| <b>Talk Time</b>        | 13 hrs                                  |
| <b>Stand by Time</b>    | 15 days(Voice trigger mode: 65 hrs)     |
| <b>Etc.</b>             | Multi connection, Micro USB I/O         |

## 8. TROUBLESHOOTING & FAQ

---

► **Is my phone compatible?**

If your mobile phone has a Bluetooth feature, it is compatible with DriveNTalk hands-free. Refer to the user's guide of your mobile phone.

► **I am having pairing problems.**

To pair your mobile phone correctly, please refer to our user guide at Support & Download.

If you still have problem connecting your mobile phone, please erase DEVICE that appears on the Bluetooth search and try once again or contact our info for support.

► **What is the pin number for a Bluetooth connection?**

The pin number is 0000 (4 zeros).

► **My phone has been paired, should I pair it every time I use?**

Once it has been paired, BHF2000S will automatically connect to your mobile phone. You can have paired links with up to 8 phones.

► **I have more than 2 mobile phones. Can I connect both phones to BHF2000S at the same time?**

BHF2000S supports multi point function. Up to two phones can be connected. It also supports paired links with up to 8 phones.

► **How can I know my phone is connected?**

- When your mobile phone is connected to a Bluetooth device, the Bluetooth symbol on your mobile phone will change a bit to indicate that this is the case. According to the manufacturers, some phones show a headset or a car symbol.

- You can also use the Voice command of BHF2000S. Tap the MFB or say "Hello, DriveNTalk" and ask "Am I connected?", then it will answer "Your phone is connected" or "No phone found".

► **How to transfer the call from speaker to my phone?**

During a call, press the CALL button and will transfer to the phone, but do not do this while you are driving.

► **If there is a second call while I am on the phone, how can I handle it?**

1) 1<sup>st</sup> call on hold, 2<sup>nd</sup> call answer

Press the MFB to accept the second incoming call, then the 1st call will be automatically put on hold. If you want to switch back the call, press the CALL button again.

2) 1<sup>st</sup> call end, 2<sup>nd</sup> call answer

Tap the MFB, then you can answer the second call. 1<sup>st</sup> call will be terminated.

3) 2<sup>nd</sup> call reject

Press and hold the MFB, then you can reject the 2<sup>nd</sup> call and keep the 1<sup>st</sup> call.

► **I want to save my call favorite numbers through the 'Settings menu' Voice command. However, it seems not working.**

You can only save the call favorite numbers by your voice when there is a last incoming call number. For easier storing, visit our website download 'Quick Voice Dial Editor'.

► **How can I update my BHF2000S?**

Download our latest firmware from Support & Download menu to your PC; use our USB cable to connect BHF2000S. To go to firmware download mode, turn your DEVICE on as pressing the Mode button.

►

► **I cannot hear anything from my DEVICE.**

Increase the volume in the DEVICE. Ensure that the DEVICE is paired to a device that is playing. Make sure your mobile phone is connected to the DEVICE by tapping the MFB button.

## 8. FOR MORE HELP

---

### 8.1 Customer care

If you are having trouble getting the BHF2000S to work, please visit our website [www.driventalks.com](http://www.driventalks.com) for help and support. Please contact us before returning the BHF2000S to a store and we will help you through any difficulty you may have.

[www.driventalks.com](http://www.driventalks.com)

[info@driventalks.com](mailto:info@driventalks.com)

### 8.2 Special features to access services in USA / Canada

#### 1. Call information

You can say 'Call information' to search for local and business listings with Bing™ 411. Find news, directions, restaurant locations, weather forecasts, movie show times, and more.

For more information, visit to the following web-site,

<http://www.discoverbing.com/mobile/411/>

#### **! Note**

Bing is a free US based information service. Long distance charges may apply when using this service outside a US calling area.

#### 2. Text message (Voice to Text Service)

You can say 'Text message' to use voice to text service. Send SMS, e-mail and more by using your voice. DriveNTalk provides a 90 days free voucher card of the voice to text service to its users which voucher codes need to be registered before using this service. All rights and responsibilities of the services are belonging with Dial2Do service provider. For more information, please go to [www.driventalks.com](http://www.driventalks.com) and search Voice to Text, Dial2Do.

#### **! Note**

Before you use this service, please check if a proper service number is stored in your BHF2000S according to where you are. You can set the 'Text message' number through Quick Voice Dial Editor program. Please visit at [www.driventalks.com](http://www.driventalks.com) to download the program.

**[Dial2Do Service No.]**

\* USA

65 03600959

\* Canada

Ontario: 4168002218

Quebec: 5149073174

Alberta: 7806281814

Calgary, Alberta: 4037751217

Vancouver, British Columbia: 6044841955

## 9. Safety and General Information

This safety and general information should be followed to safely use your BHF2000S.

- DriveNTalk is not responsible for any consequences arising from insubordinations of this safety information.
- o Use only provided chargers specifically designed for your DEVICE. Incompatible chargers can cause serious injuries or damage to your DEVICE.
- o Keep your DEVICE away from small children and pets. Small parts may cause choking or serious injury if swallowed.
- o Never place your DEVICE on or in heating devices, Such as microwave ovens, stoves, or radiators. Battery may explode when overheated.
- o Do not allow your DEVICE to get wet. Liquid and moisture can cause serious damage to electric devices.
- o Do not separate, repair nor remodel the DEVICE arbitrarily. If repair is needed, please contact us or your dealer.
- o Do not use any chemical solvents or detergent. The use of chemicals on the DEVICE may cause damage to the DEVICE. Turn the DEVICE off and use a soft dry cloth to clean the phone.
- o Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.

### **Declaration of Exemption**

- Manufacturer, Dealers, Retailers are not responsible for any loss caused by operation that does not follow instructions in this manual.
- The explanations and specifications in this guide are for current version of BHF2000S. A later version of this guide might be available in electronic format at DriveNTalk's website at [www.driventalks.com](http://www.driventalks.com).
- We reserve the right of improving and changing the product reliability, features and appearance design without notice in advance.

## **10. Certification and Safety approvals**

### **FCC Information to User**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **Caution**

Modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**FCC Compliance Information :** This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

## 11. Warranty

### Limited One (1) Year Warranty

DriveNTalk ("DNT") warrants this product to be free from defects in materials and workmanship (subject to the terms set forth below) for a period of one (1) year from the date of purchase ("Warranty Period").

During the Warranty Period, DNT will repair or replace (at DNT's sole discretion) this product or any defective parts ("Warranty Service").

If repair or replacement is not commercially practicable or cannot be timely made, DNT may choose to refund to you the purchase price paid for the affected product. Repair or replacement under the terms of this Warranty does not give right to any extension or a new beginning of the period of warranty.

### Claims under the Warranty

To obtain Warranty Service, please contact the DNT's dealer from which you purchased this product. You will need to return the product to the dealer in either its original packaging or packaging affording an equal degree of protection.

The following information must be presented to obtain Warranty Service: (a) the product, (b) proof of purchase, which clearly indicates the name and address of the dealer, the date of purchase and the product type, and (c) reason for return.

As part of DNT's efforts to reduce environmental waste you understand that the product may consist of reconditioned equipment that contains used components, some of which have been reworked. The used components all live up to DNT's high quality standards and comply with DNT's product performance and reliability specifications. You understand that replaced parts or components will become the property of DNT.

### Limitation of Warranty

This Warranty is only valid for the original purchaser and will automatically terminate prior to expiration, if this product is sold or otherwise transferred to another party. The warranty provided by DNT in this statement applies only to products purchased for use,

and not for resale. It does not apply to open box purchases, which are sold “as is” and without any warranty.

Specifically exempt from warranty are limited-life consumable components subject to normal wear and tear, such as cables, mount, clip, tapes, cushions, modular plugs, decorative finishes, batteries, and other accessories.

This Warranty is invalid if the factory-applied serial number, date code label, or product label has been altered or removed from the product.

This Warranty does not cover defects or damages that result from: (a) improper storage, misuse or abuse, accident or neglect, such as physical damage (cracks, scratches, etc.) to the surface of the product resulting from misuse; (b) contact with water, extreme humidity, sand, dirt or the like or extreme heat; (c) use of the product or accessories for commercial purposes or subjecting the product or accessories to abnormal usage or conditions; or (d) other acts which are not the fault of DNT.

Furthermore, this Warranty does not cover damage due to improper operation, maintenance or installation, or attempted repair by anyone other than DNT or a DNT's dealer which is authorized to do DNT warranty work. Any unauthorized repairs will void this Warranty. Neither does this Warranty cover defects or damages that result from the use of non-DNT branded or certified products, accessories, or other peripheral equipment, nor does this Warranty apply to products which have not been charged for six (6) months.

DNT does not offer any warranty for such performance.

REPAIRS OR REPLACEMENTS AS PROVIDED UNDER THIS WARRANTY ARE THE EXCLUSIVE REMEDY OF THE BUYER. DNT SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT.

EXCEPT TO THE EXTENT PROHIBITED BY LAW, THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS AND IMPLIED WARRANTIES WHATSOEVER, INCLUDING BUT NOT LIMITED TO THE WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PRACTICAL PURPOSE.

#### **! NOTE**

This Warranty gives you specific legal rights. You may have other rights which vary from location to location. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages

or implied warranties, so the above exclusions may not apply to you. This Warranty does not affect your legal statutory rights under your applicable national or local laws.

© 2011 Enustech Inc. The driventalk logo and driventalk are registered trademarks of Enustech Inc. All rights reserved.