

Iqua Touch BHS-803 Bluetooth Headset/BHS-803

RSVP Your Icon7 Style Now!

Thank you for your interest and purchase of an Icon7 product! Your enjoyment and satisfaction with our product(s) are our greatest achievements, and to better serve you, we cordially invite you to register your Icon7 product online at: www.icon7.com/support.aspx

Please go to the link above to register and receive Icon7's latest news, product, software and driver updates, plus other fun-filled offerings...

So, don't wait and REGISTER TODAY!

Important Safety

To protect your hearing, please always use your headset with the volume set at moderate levels and avoid turning up the volume to block out noisy surroundings. If you experience discomfort or ringing in your ears, immediately discontinue using the headset and consult a physician.

To avoid the risk of electric shock, explosion or fire, please use only the charger supplied by Icon7 to charge the product.

To avoid the risk of explosion, fire or leakage of toxic chemicals, please do not dispose of the headset in a fire, also do not attempt to open the product or remove the battery.

Legal Notice

© 2009 Icon 7 Inc. ("Icon7"). All rights reserved. Icon7 logo and other Icon7 marks are owned by Icon7 and may be registered. All other trademarks are the properties of their respective owners. <http://www.icon7.com>

Table of Content

Getting Started

Package Content

Getting Started

Package Content

- VOX Touch Multipoint Bluetooth Headset
- Charging Stand
- AC Adapter
- USB Extension Cable
- Ergonomic Ring-type Ear Buds x 3 (small, medium and large)
- Ergonomic In-ear Ear Buds x 3 (small, medium and large)
- Ear hook
- Pouch

User Interface

- Touch Panel is for:
 - Call Control
 - Volume Up & Down
 - Microphone Mute & Un-mute
 - Redial & Voice Dial
 - Battery Check
- Power Button is for:
 - Power On & Off
 - Pairing

Features

- Touch user interface
- Multipoint – connect to 2 Bluetooth devices simultaneously
- Active noise cancellation
- Auto Volume – dynamically adjusting volume base on surroundings
- Answer, End & Reject calls
- Redial, Voice Dial and Put a call on hold

Specification

- Bluetooth version 2.1 + EDR with Headset (HSP) and Hands-free (HFP)profiles support
- Up to 3 hours talk time & 60 hours of standby time
- Rechargeable Li-poly battery with charging options of AC adapter and USB
- Ultra light weight – less than 7 grams
- Operating range up to 10 meters (about 33 feet)
- Operating and storage temperature is 50F – 104F (10C – 40C)

Use Your Bluetooth Headset

Charging

1. Connect the charging stand with the AC adapter or PC USB port.
2. Put the headset on the charging stand and make sure the red indicator light on the headset is on.
3. If a call comes in during charging, simply remove the headset from the charging stand and touch the headset to take the call.
4. The red indicator light will be off when the battery is fully charged.
5. The full charging time is less than 2 hours.

Pairing

Pairing with cell phone

1. Turn on Bluetooth on your cell phone or Bluetooth device and get it into pairing mode. Consult the manual of your Bluetooth device for further assistance.
2. Turn off the headset if the headset is on.
3. Press the Power button for 8 seconds to enter pairing mode, the blue indicator light (represents Line 1) will start to blink every 1 second.
4. Tap the power button to switch the indicator light to orange (represents Line 2) if you want to pair Line 2 with the Bluetooth device.
5. Enter 0000 if your cell phone requests a passkey.

Pairing with PC or Mac

On PC, the build-in Bluetooth driver in Windows XP and Vista does not support headset nor hands-free features, please install the Bluetooth driver comes from your PC or Bluetooth dongle for complete Bluetooth feature support.


Mac OS X supports Bluetooth headset and hand-free features; simply follow "Mac OS X" section below to setup the headset for your Mac.

WIDCOMM Bluetooth Software for Windows


1. Double-click Bluetooth icon located on your desktop or Windows task bar to bring up Setup Wizard and follow the steps on your screen.



2. Select VOX Touch as the Bluetooth device to add.

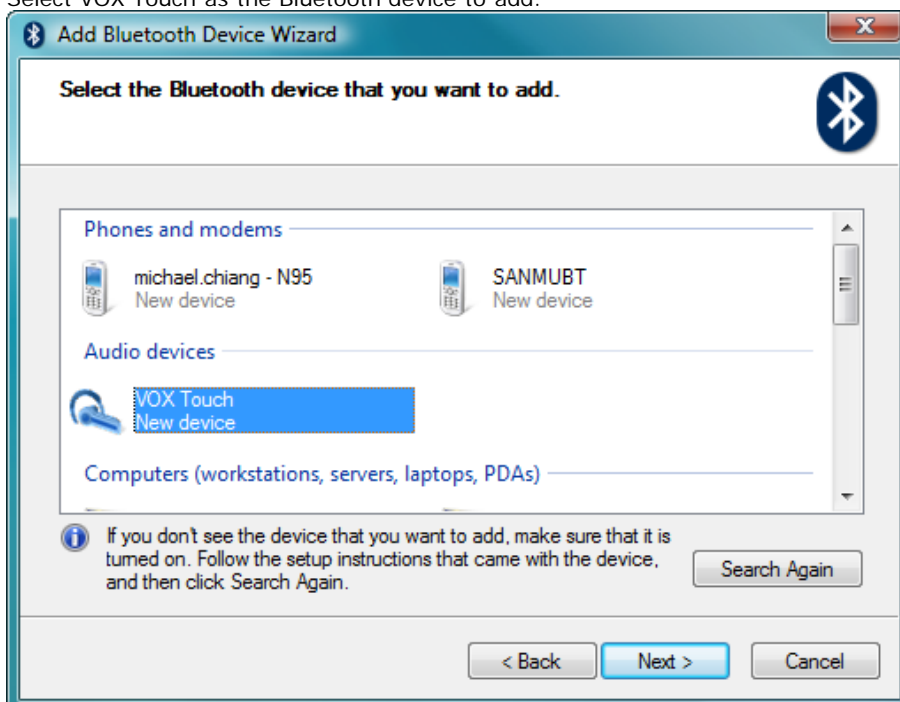


3. Use 0000 as the passkey.

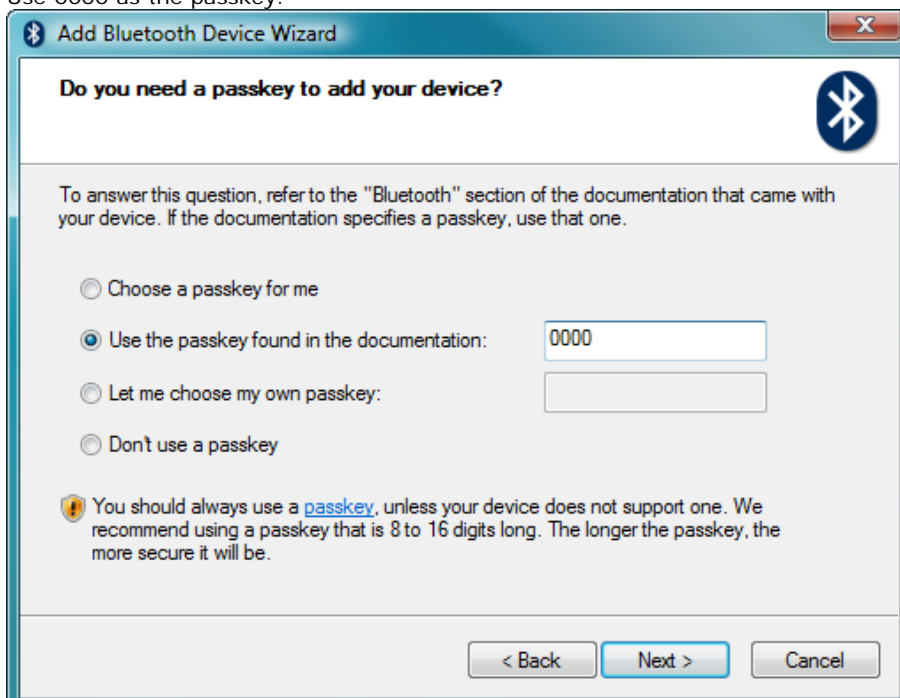


4. Complete the pairing. Now the headset is your default speaker and microphone, you can use the headset with Skype.


1. Double-click Bluetooth icon located on your desktop or Windows task bar to bring up Setup Wizard and follow the steps on your screen.

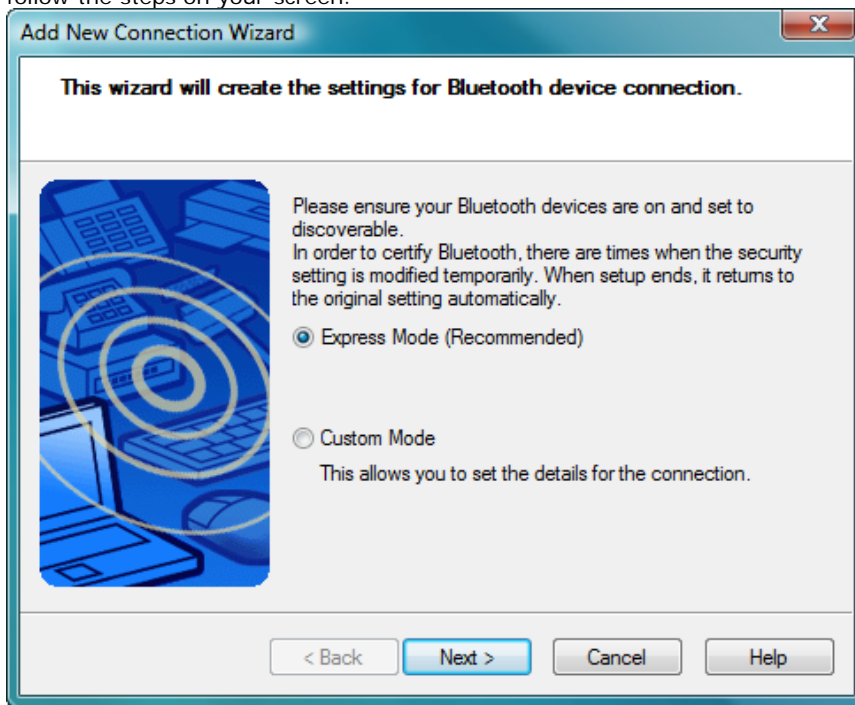


2. Select VOX Touch as the Bluetooth device to add.

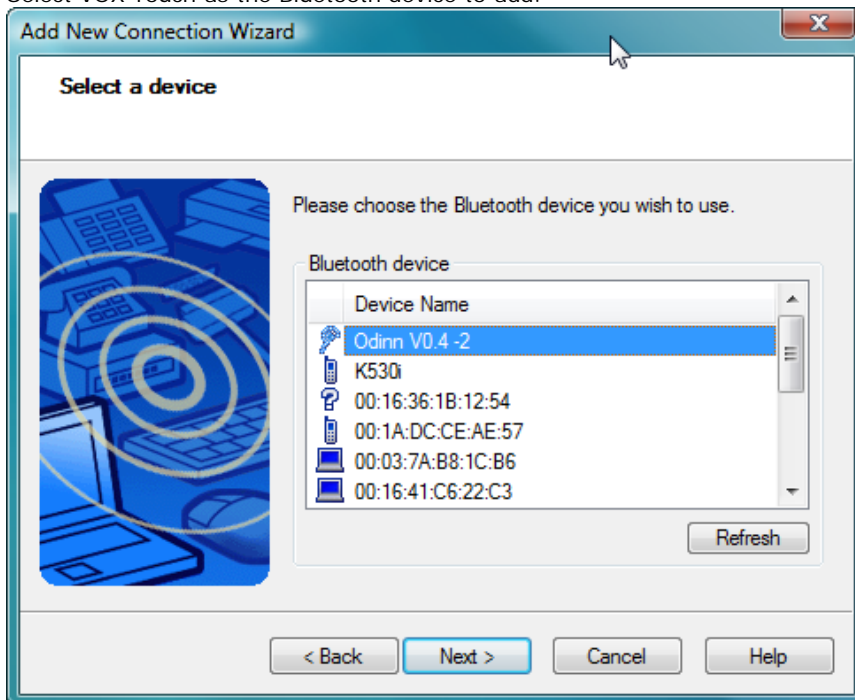


3. Use 0000 as the passkey.

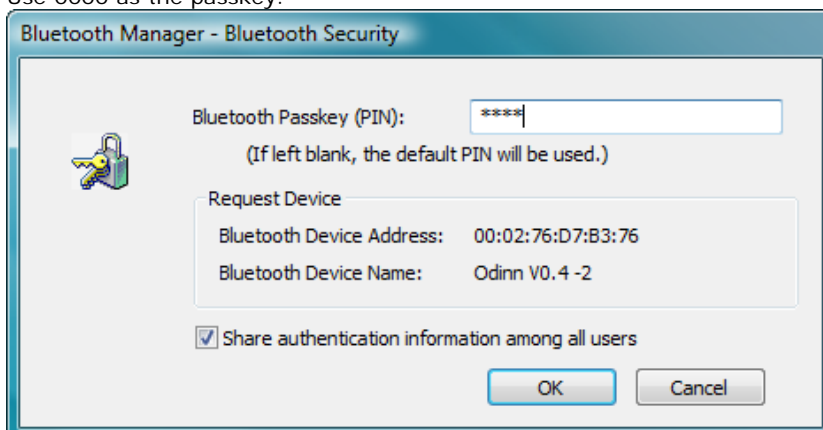


4. Enable the option of VoIP-associated application setting.

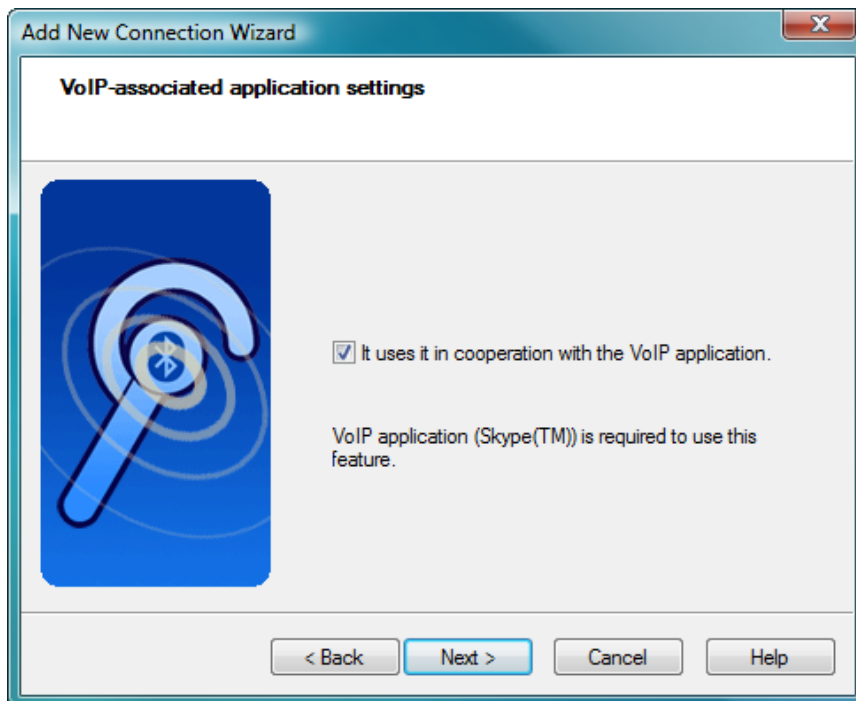

5. Complete the pairing.

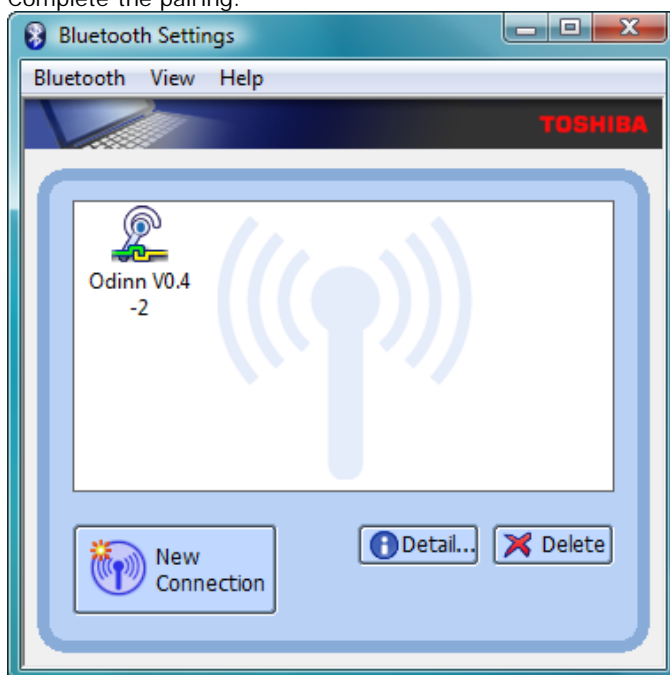


6. A confirm window pops up when you start Skype, choose "Allow access" to make the headset as the default microphone and speakerphone of Skype. This option effects Skype only, the system audio preferences remains unchanged.

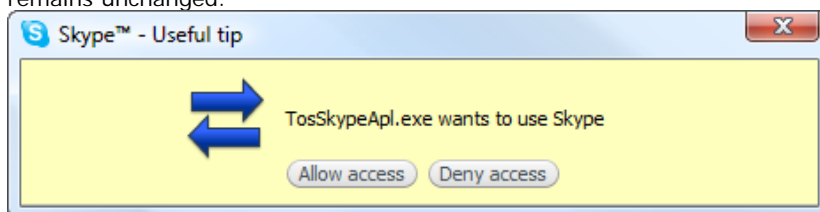


Mac OS X 10.5 Leopard


1. Go to System Preferences > Bluetooth

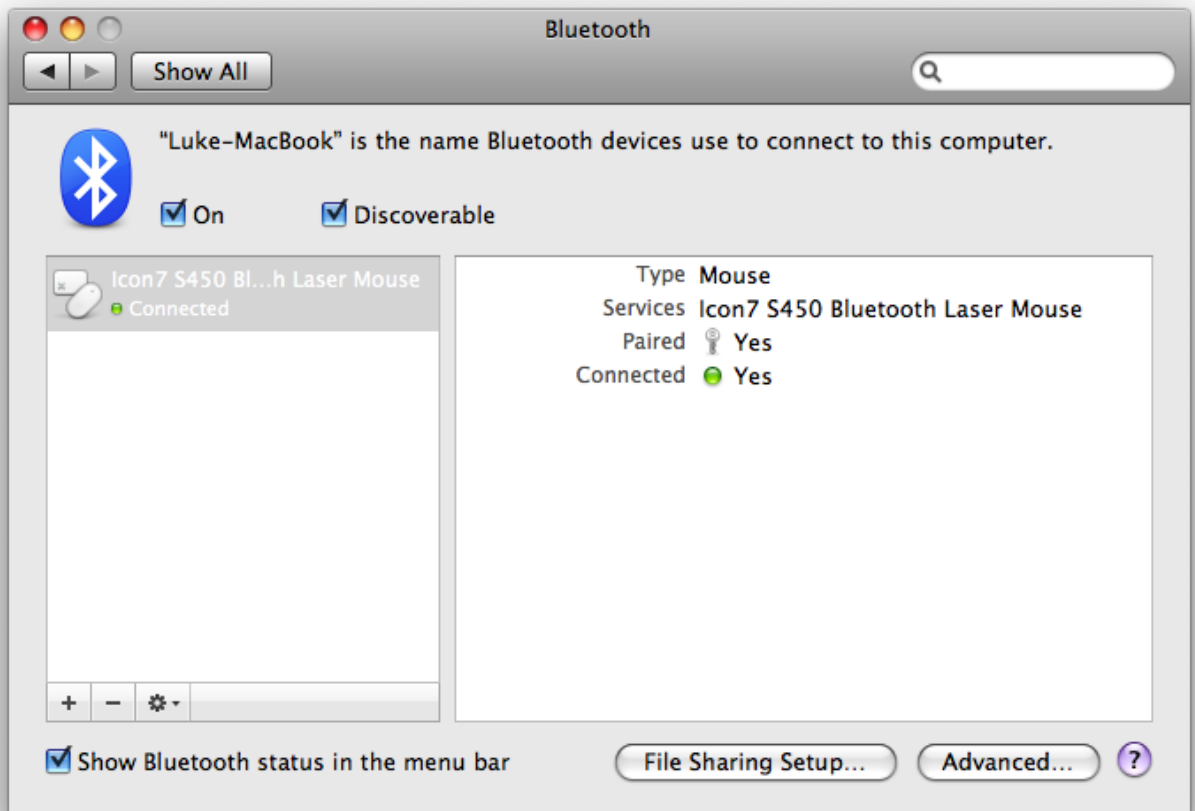


2. Click the + under the device list to launch Bluetooth Setup Assistant

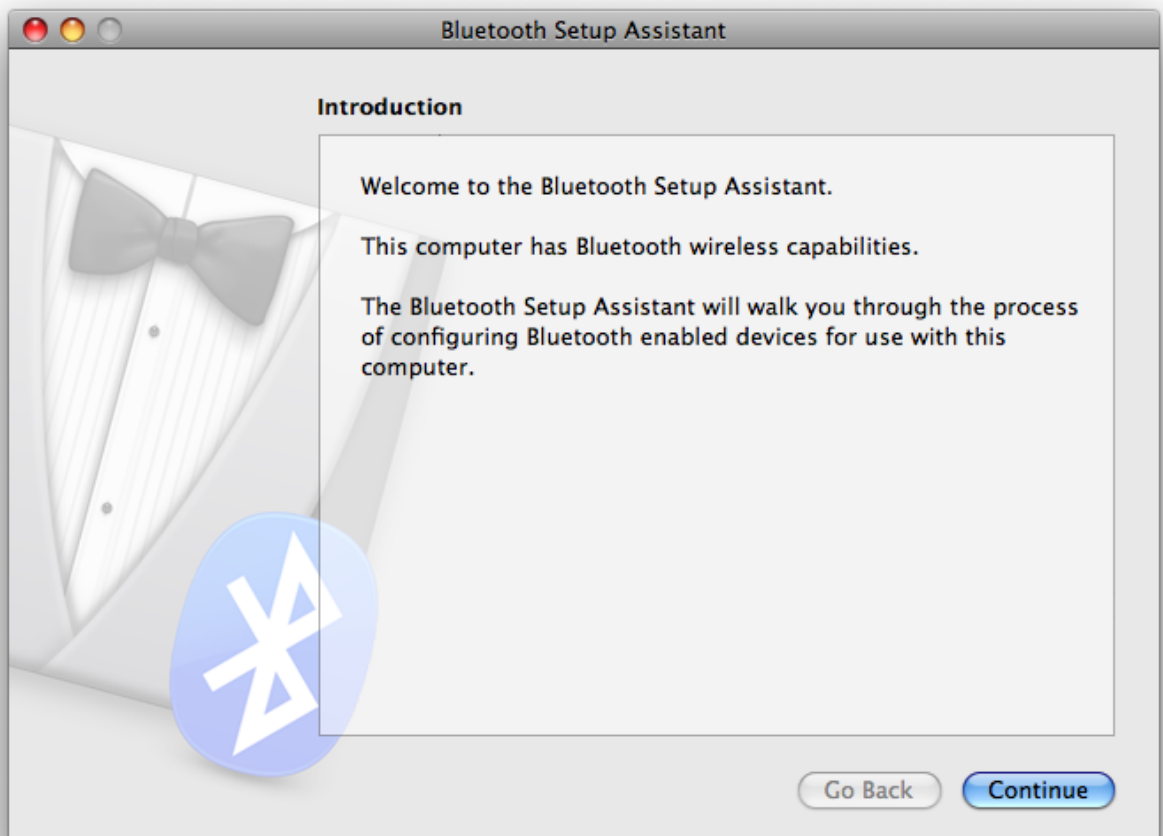


3. Select Headset as the device type

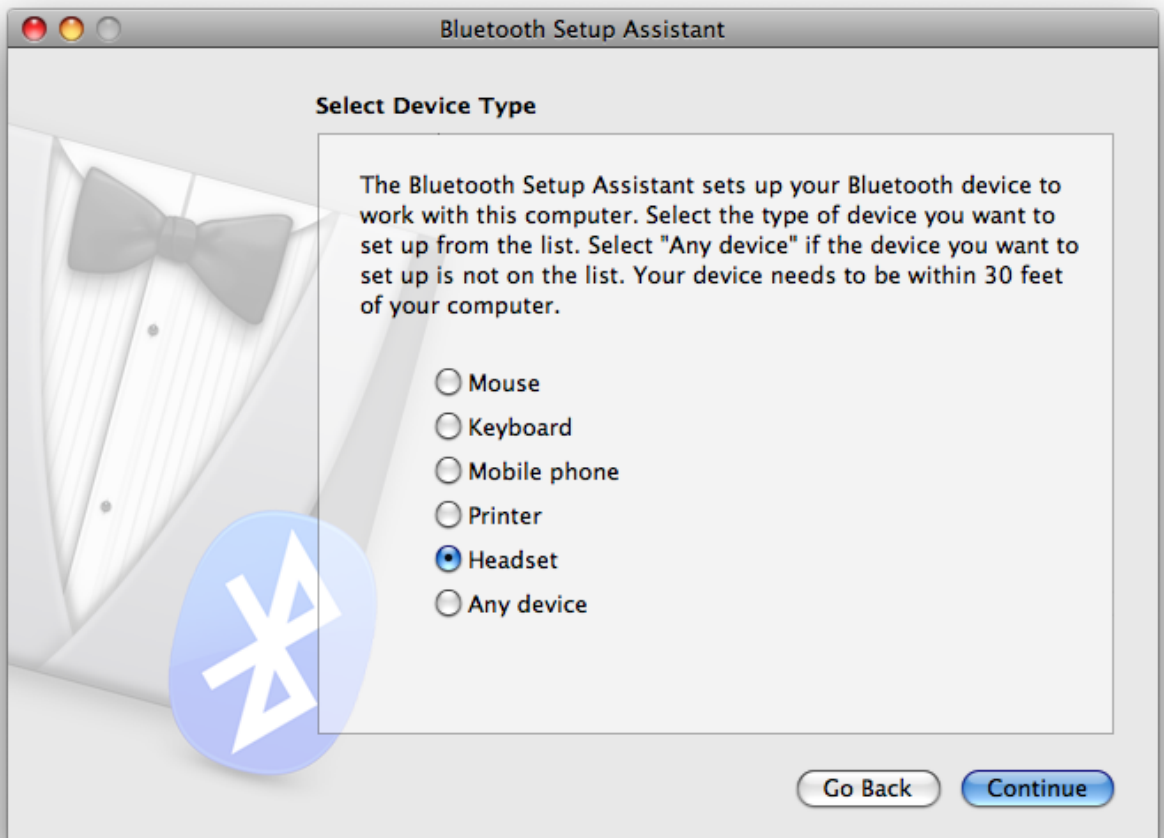


4. Select VOX Touch

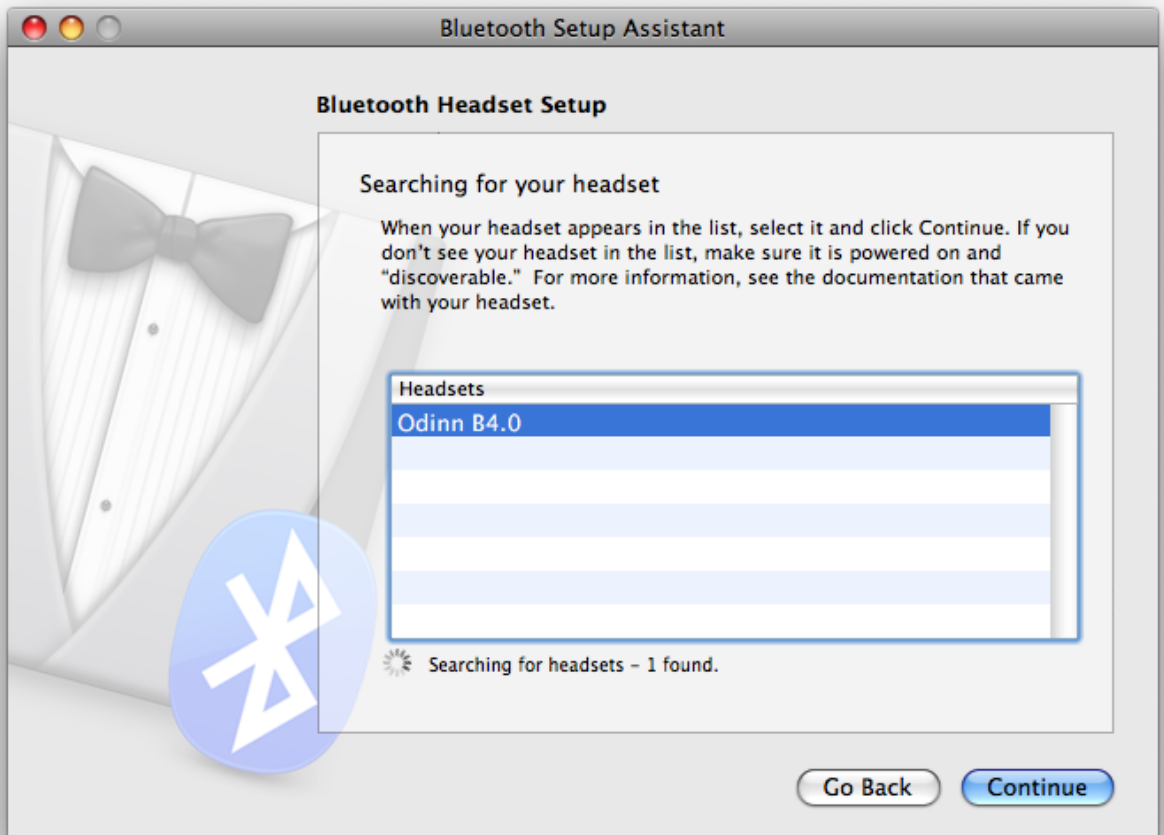

5. Enter 0000 as the Passkey if needed

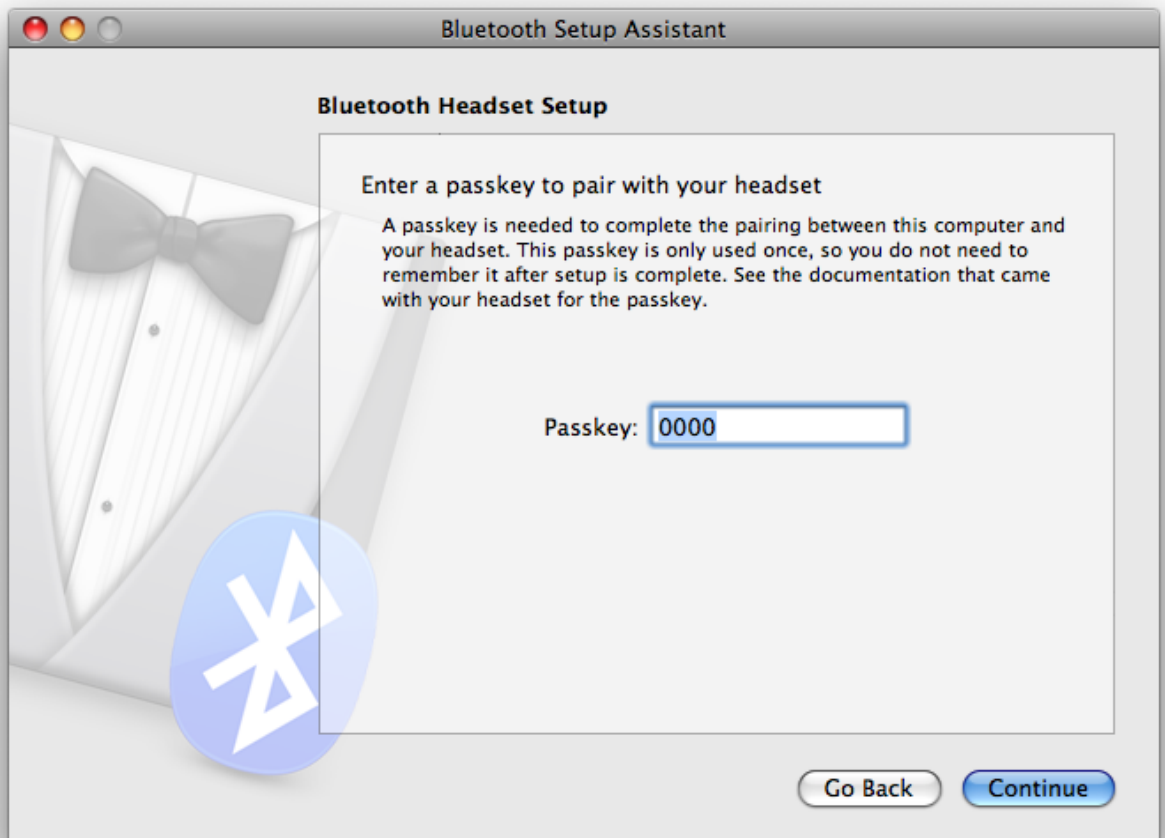

6. VOX Touch appears in the device list after the pairing is completed.

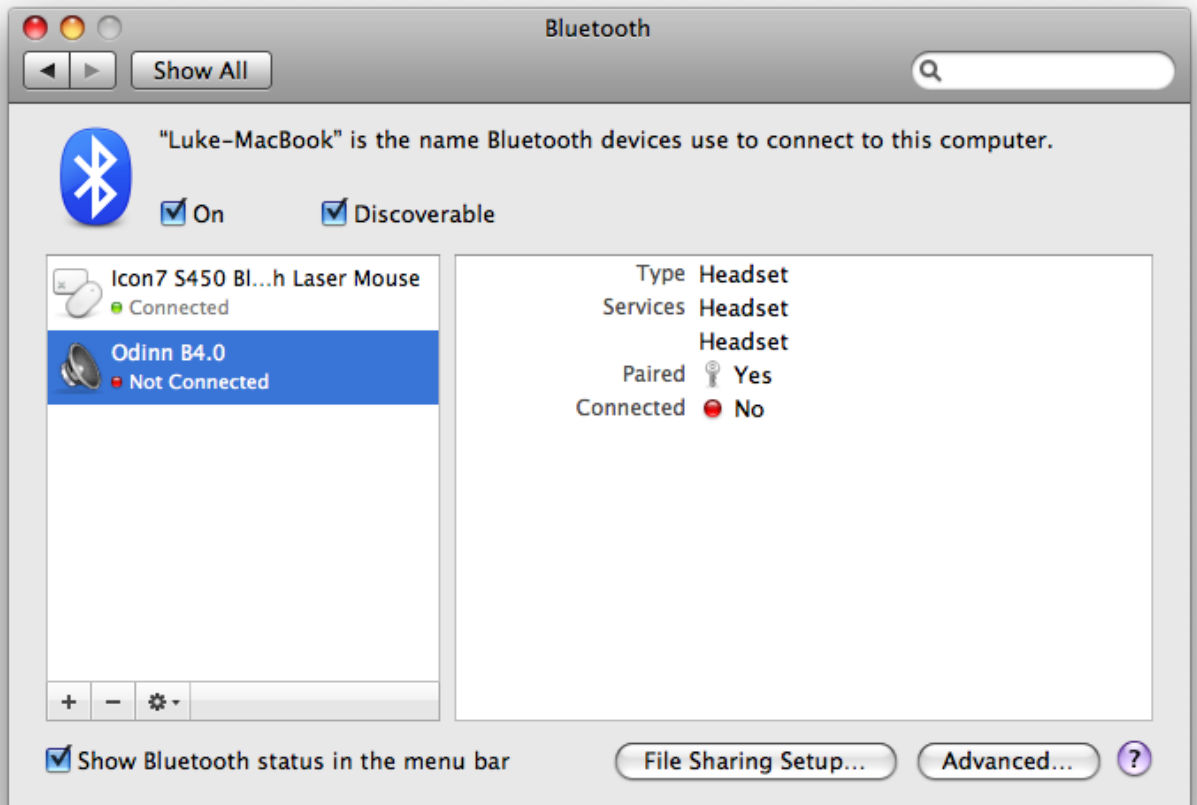

7. Turn off the headset and turn it on again to ensure your Mac can connect to the headset successfully. Agree the Mac to use the headset as a Bluetooth audio device.



8. Please make sure to assign VOX Touch as the audio device in the applications you're going to use.



Wearing




Correct Fit



Incorrect Fit

Calling Functions



Basic

1. Turn on/off the headset: press the power button for 1 second
2. Answer a call: tap the touch panel
3. Reject/End a call: double-tap the touch panel
4. Volume up: slide-up the touch panel
5. Volume down: slide-down the touch panel
6. Mute/Un-mute microphone: press the touch panel for 3 second (you'll hear a beep every 2 seconds)
7. Battery check: tap the power button

Multipoint

Please read "Using the headset with 2 cell phones" for detail.

1. Put current call on hold and answer the incoming call: press the touch panel
2. End current call and answer the incoming call: double-tap the touch panel

Advanced

1. Redial the last number: double-tap the touch panel while in idle
2. Voice dial: slide-down while in idle
3. Get into pairing mode: press the power button for 8 seconds (see Pairing section on above)
4. Clear paired devices: double-tap the power button while in pairing mode

Reconnect

To maintain a connection and good audio quality, please keep your headset within 10 meters of the Bluetooth device. If you're too far away to lose the connection, you'll hear a beep, and the headset will try to reconnect to the Bluetooth device automatically for 2 minutes.

If the headset can not connect to the Bluetooth device in 2 minutes, it will enter Connectable mode to save power consumption and stay in that mode for 30 minutes. While in Connectable mode, you can touch the touch panel to make the headset to accept the connection request from Bluetooth device.


The connection is also dependent upon the device with which the headset is paired. If you can not reconnect to the Bluetooth device, please turn off and turn on the headset again so the headset can start the connection over.

Using the headset with 2 cell phones

The VOX Touch support Multipoint technology, which allows you to use a single headset with 2 cell phones or Bluetooth devices at the same time. For example, wearing the headset to chat with your friends through Skype on PC and answer the cell phone when a call comes in.

- Pair the headset with 2 Bluetooth devices (see Pairing section)
- When a call comes in while you're in another call, Press the touch panel to put current call on hold and answer the new call, or Double-tap the touch panel to end current call and answer the new call.

Pack & Go



Indicator Tones & Lights

	Tones	Blue (if connected)	Orange (if connected)	Red
Standby	beep once	blinks every 5 seconds	blinks every 5 seconds	
Incoming Call	beep once	blinks fast	blink fast	
Ongoing Call	beep once	blinks every 2 seconds	blinks every 2 seconds	
Rejecting Call	beep once			blink once
Microphone Mute	beeps every 2 seconds			
Out of Range	beep once			blinks every 2 seconds
Power On or Off	beep once			on for 1 second
Pairing	beep once	blinks fast	blinks fast	
Battery 100% ~ 50%		on for 1 second		
Battery 50% ~ 20%			on for 1 second	
Battery 20% ~ 0%				blinks every 5 seconds
Charging		blinks every 5 seconds	blinks every 5 seconds	on constantly

Troubleshooting & FAQ

FAQ

What Bluetooth devices can work with the headset?	<ul style="list-style-type: none"> • Cell phone with Bluetooth enabled. • Notebook or desktop PC with Bluetooth enabled.
I cannot hear anything	<ul style="list-style-type: none"> • Increase the volume. • Ensure the cell phone is connected with the headset and transfer voice to the headset. • Ensure the headset is paired with the Bluetooth device.
Audio quality is poor	<ul style="list-style-type: none"> • For optimum audio quality, do not leave away from your cell phone too far. • Point the microphone toward your mouth. Please refer to "Wearing" section for further detail. • Try to wear your headset on the same side of the body as your cell phone. • Try in-ear ear bud to block noise getting into your ear directly.

The ear bud cannot fit my ear properly	<ul style="list-style-type: none"> • Try a different size or type of ear bud
I cannot use redial, voice dial or put a call on hold	<ul style="list-style-type: none"> • These features require your cell phone has according capabilities supported. Please check your device manual for details.
The headset is not responding at all?	<ul style="list-style-type: none"> • The headset may turn off automatically if out of range for over 30 minutes. Please turn on the headset again. • Make sure the headset is fully charged. • You can reset the headset to eliminate unexpected crash. Please turn off the headset, put the headset into the charging stand and then slide down on the headset.
How to clear paired devices completely?	<ul style="list-style-type: none"> • While in pairing mode, double-tap the button to clear all paired devices. The headset will automatically enter pairing mode when you turn on the headset next time.

Icon 7 Inc. 2-year Limited Warranty Information

Thank you for your purchase of our product! Icon 7 Inc. ("Icon7") warrants your Icon7 hardware product against defects in material and workmanship under normal conditions of use and service for two years beginning from your original date of purchase. Please retain your original dated sales receipt as proof of the date of purchase. You will need it and might be requested to show the receipt for your warranty service. In addition, this warranty is limited to the original purchaser and is non-transferable. Under this warranty, Icon7, at its discretion, shall repair or replace the defective device.

For this warranty to be in effect, by normal conditions of use, the product should be used and handled as outlined in the instructions accompanying the product. Icon7 does not cover any damage due to accident, negligence or misuse of the product. This warranty is only valid if the product is used on the required systems as outlined on the packaging. Please check the product box or user's manual for further details and instructions. Any other inquiry, please e-mail: support@icon7inc.com. Repair or replacement, as indicated in this warranty, is at the discretion of Icon7. Icon7 shall not be responsible or liable for any incidental damages. Some territories/countries do not allow limitations on how long a warranty lasts, so the above limitation may not apply to your particular territory/country.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user authority to operate the equipment.