



REDRAGON
DRACONIC
BLUETOOTH V5.0 RGB MECHANICAL KEYBOARD

US UK


Dear user

Thank you for you choosing **REDRAGON** Brand, to protect your rights and for better customer service, we ask that you note our warranty rules.

1. Within guaranty period, repair is guaranteed for failure due to electrical circuit problems. Man-made damages, such as disassembly, hard impacts, submersion into water, plugging into improper current or voltage, and damage caused by natural disasters such as fire, flood, or earthquake are not included.
2. Consumable parts (such as foot stick) and spare parts replacement are no included in our warranty.
3. Please fill out the warranty card. Warranty card is valid with the stamp of the retailer.
4. This warranty card will not be reissued if lost. Please keep it in a safe place.

OS support

Bluetooth 4.0 and above
Tablet with Bluetooth V4.0 and above version
Smart phone with Bluetooth V4.0 and above version

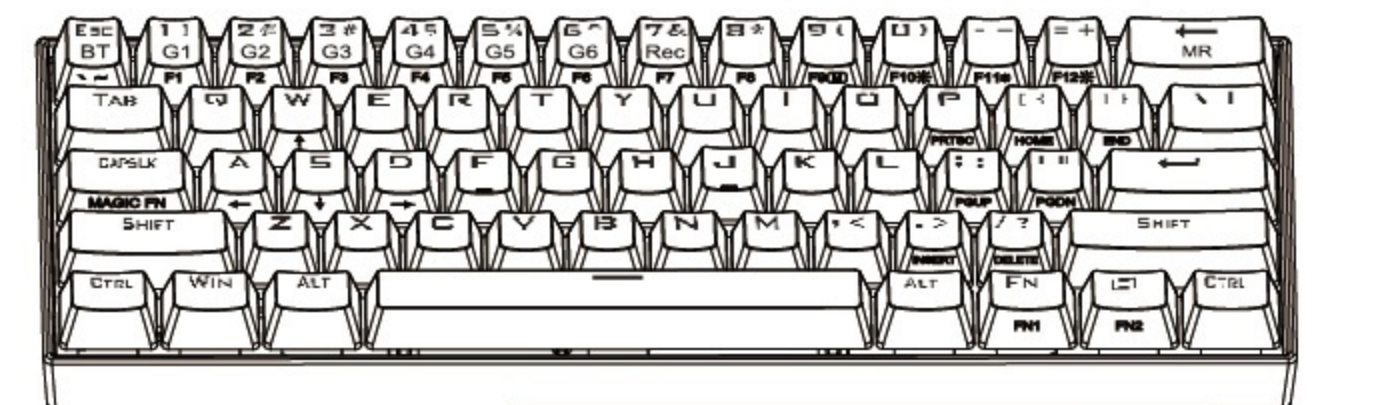

Keyboard layout and button instruction

- A. Power Switch ON/OFF**
- B. Bluetooth channel B1/B2/B3**
- C. Bluetooth indicator**

1. Paired with B1 on Red, paired with B2 on Blue , paired with B3 on Green.
 2. Twickle on Red while it is pairing.
- D. Battery indicator**
1. Twickle on Red for low power indication.
 2. Twickle on Green for charging.
 3. Light on Green while charging completed.

Wired connecting

Plug type C to USB cable with keyboard and PC, put the power switch to OFF, keyboard is plug and play, no need driver.

Bluetooth connecting

- A. connect keyboard with computer**
 1. Turn keyboard power switch to ON.
 2. Select B1/B2/B3 from the bluetooth channel switch, For example put the switch on B1, the bluetooth indicator twickle ready for pairing.
 3. Turn on PC bluetooth, search bluetooth keyboard B1 from the available list.
 4. Pair with B1.
- B. Connect keyboard with tablet**
 5. Turn keyboard power switch to ON.
 6. Select B1/B2/B3 from the bluetooth channel switch, For example put the switch on B2, the bluetooth indicator twickle get ready for pairing.
 7. Turn on tablet bluetooth , search bluetooth keyboard from the available list
 8. Pair with B2.
- C. Connect keyboard with smart phone**
 9. Turn keyboard power switch to ON.
 10. Select B1/B2/B3 from the bluetooth channel switch, For example put the switch on B3, the bluetooth indicator twickle get ready for pairing.
 11. Turn on smart phone bluetooth, search bluetooth keyboard from the available list.
 12. Pair with B3.

How to charge keyboard

Plug the type C cable to USB between keyboard and PC , battery indicator will be twickle in Green while charging, the indicator stop twickle and turn ON when charging complete,charging time is around 10 hours.

Key Function Introduction

FN1 key work with other keys

1. FN1+<ESC>= `~
2. FN1+<1~0>= F1~F10
3. FN1+<_>=F11
4. FN1+<+>=F12
5. FN1+<A>=←
6. FN1+<S>=↓
7. FN1+<D>=→
8. FN1+<W>=↑
9. FN1+<P>=PRTSC
10. FN1+<[>=HOME
11. FN1+<]>=END
12. FN1+<:;>=PGUP
13. FN1+<">=PGDN
14. FN1+<.>=INSERT
15. FN1+</?>=DELETE

FN2 key work with other keys

1. FN2+"9"=9 Backlighting modes switch, including The trial of Light,Breathing, Normally on, Go with the wave, Clouds fly, Winding Path, Flowers blooming, Snow winter jasmine,Swift action, Both ways, Surmount, Fast and the furious.
2. FN2+ "0": Turn off backlighting.
3. FN2+ "-": Brightness -, total 5 levels.
4. FN2+ "+": Brightness+, total 5 levels.
5. FN1+WIN: Lock Windows key, press it again to unlock.
6. FN1+ESC: Press and hold for 3 seconds, Back to factory setting.
7. FN2+ESC: Press and hold for 3 seconds, broadcast function.

Special keys function

CAPS LOCK: In wireless mode, Press it for Caps function and keys light on, long press CAPS key will be switch to Magic FN key function.

Macro recording for gaming

1. Press FN2+7(REC), CAPS key twickle slowly to indicate keyboard is ready for recording.
2. Press FN2+1~6 (any key from 1~6), CAPS key twickle quickly, press the desired key to record, max to 64 keys (Fn1, APP keys are not available for recording) or 30 seconds, press REC to save and quit, preset macro keys will be light on Green.
3. Delete all macro: press and hold FN2+8 for 5 seconds to delete all macro. Delete macro: Press FN2+7, then press the desired macro key, press FN2+7 again to save and quit.
4. Play macro: press the macro key to play recording(The preset macro keys on Green).

Light recording for different gaming mode

Press FN2+backspace to light recording mode, then press it again to get start to recording while CAPS key twickle, press the desired key for several time and set the light color, repeat it to other desired keys, press FN2+backspace to save and quit(CAPS key stop twickle).

FAQ

1. If the keyboard doesn't respond, please check if the keyboards USB cable is correctly inserted into the corresponding USB port on the computer, or try another USB port on the computer.
2. If you spill liquid on the keyboard, please remove keyboardsUSB cable from the computer immediately. Wipe up excess liquid and put the keyboard in a warm place (for instance, under a lamp) to let the keyboard dry naturally before using again.

FCC statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

