


BTHS02C-MWH

Bluetooth User Manual



PLEASE NOTE: Before using your new MWH Bluetooth headset, you must fully charge it and set it up by 'pairing it' with your selected Bluetooth device.

About your MWH Bluetooth Headset

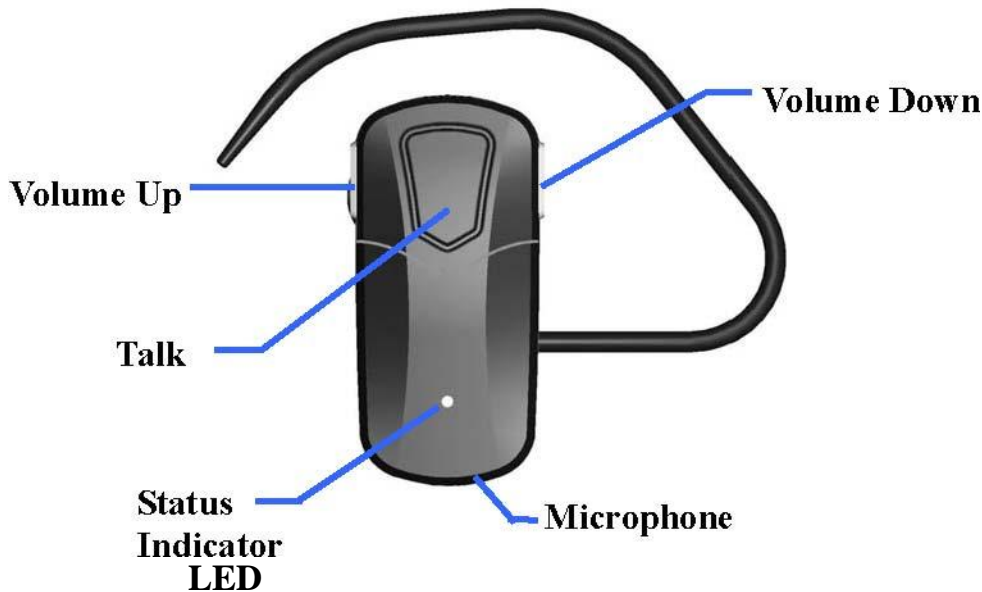

Charge your headset

Make sure your MWH Bluetooth headset is fully charged before you start using it. Use the USB charging cable to charge it. When the battery is running low, you will hear 4 beeps and the LED indicator flashes in red in every 20 seconds to remind you that you need to charge your headset. If the headset is paired to the handset before you charge it, the connection will be disconnected. Please pair again after charging. **Important: The headset cannot be used while charging.**

The LED indicator on your headset indicates the charging status while charging:

Light	Status
Red	Charging
Off	Charge complete
Red Flash	Battery is running low

Turing your heaset on and off

To	Press and hold	You will hear	You will see
Turn headset on	The Multi-Function Button for 2 seconds	2 ascending tones	3 purple flashes
Turn headset off	The Multi-Function Button for 5 seconds	1 long beep and then 2 descending tones	3 red flashes

Pairing the headset with your phone

Before you use your Bluetooth headset, you need to pair it with your mobile phone.

1. Make sure the headset is off.

2. Press and hold the Multi-Function button for 4 seconds. You will first turn on the headset then enter pairing mode.

To	Press and hold	You will hear	You will see
Turn the headset on	The Multi-Function Button for 2 seconds	2 ascending tones	3 purple flashes
Enter pairing mode	The Multi-Function Button for 2 more seconds when headset is on	4 ascending tones	The blue and red light alternatively flashes

3. Set your Bluetooth phone to 'discover' the Bluetooth headset. Follow your phone's instruction guide. This usually involves going to a 'setup,' 'connect' or 'Bluetooth' menu on your phone and selecting the option to 'discover' or 'add' a Bluetooth device.

4. Your phone will find BTHS02x. Your phone then asks if you want to pair with it. Accept by pressing 'Yes' or 'OK' on the phone and confirm with the passkey or PIN= 0000 (4 zeros). Your phone will confirm when pairing is complete. In case of unsuccessful pairing, repeat steps 1 to 4.

Important: If pairing was successful, the blue light flashes every 5 seconds.

How to

Answer a call

- Press once the Multi-Function Button on your headset to answer an incoming call.

End a call

- Press once the Multi-Function Button on your headset to end an active call.

Adjust sound and volume

- Press the volume up or down button to adjust the volume.

To	Press	You will hear
Turn the volume up	△ on the side of the headset	1 beep
Turn the volume down	▽ on the side of the headset	1 beep

There are 7 scales of volume. When the volume has reached the maximum or minimum scale, you will hear 2 beeps.

Auto connection

- Once you pair the headset with a device, the headset will be automatically connected to the device whenever you turn the headset on.

Activate voice dialing Please check if your mobile phone supports voice dialing. If it does, please set up voice tags on your mobile phone first, if required. Most phones have the capability to recognize voice commands without pre-programming. Refer to your phone's user manual for further details.

- Press once the Multi-Function Button when the headset is on and not used. You will hear a short beep and the phone will enter voice commands mode. The purple light flashes every 5 seconds.
- Say the command you wish to activate
- Press the Multi-Function Button again to cancel the voice commands menu.

Last number dialing

Press and hold the Multi-Function Button for 2.5 seconds when the headset is on and not used. You will hear a long beep and the redial tone. The phone will dial last number. The purple light flashes every 5 seconds.

Call waiting and placing a call on hold This lets you put a call on hold during a conversation and answer a waiting call. Press and hold the Multi-function Button for 2.5 seconds during a conversation to put the active call on hold and answer the waiting call. Press the Multi-function Button for 2.5 seconds to switch between the two calls. Press once the Multi-Function Button to end the active conversation.

Mute/unmute Press and hold the volume up button (Δ) for 2.5 seconds during a conversation to mute. You will hear a long tone indicating mute mode. The microphone is muted but you can still hear the voice from the other party. A low beep alert plays every 3 seconds during a muted call. To unmute, press the volume up button (Δ) for 2.5 seconds again.

Transferring a call Press and hold the volume down button (∇) for 2.5 seconds during a conversation to transfer the current call from your headset to your phone. To switch back, press the volume down button (∇) for 2.5 seconds again.

Reject call Press and hold the Multi-Function Button for 2.5 seconds when the call is incoming.

You will hear a long beep then reject an incoming call.

Safety and General Information

1. Please read this guidebook carefully and follow the instructions.
2. To avoid any damage or malfunction of the unit, do not drop it from a high place.
3. Keep away unit from humidity, water and any other liquid. And if the unit is exposed by water, moisture and other liquid directly, do not operate it normally to avoid any electrical shock, explosion and damage of the unit.
4. Do not place or keep the unit near the heat sources such as direct sunlight, radiators, stoves or other apparatus which produce heat. It may cause explosion, degrade performance and reduce battery life.
5. Do not modify, repair & disassemble unit at discretion (especially battery: it may cause an explosion)
6. Do not place heavy objects on the unit.
7. Use only supplied and approved charging device.
8. Unplug this unit when it is unused for a long period of time or during lightning storms.

CAUTIONS: ELECTRIC SHOCK HAZARD The battery used in this device may present a risk of fire or chemical burn if mis-treated.

WEEE Symbol Information

- Correct Disposal of This Product (Waste Electrical & Electronic Equipment)

(Applicable in the European Union and other European countries with separate collection systems) This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

Bluetooth is a trademark owned by the Bluetooth SIG, Inc.

FCC Information .

Federal Communications Commission (FCC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference and
- 2) this device must accept any interference received, including interference that may cause undesired operation of the device.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.