



IMPORTANT INFORMATION



H201 Bluetooth Headset

IMPORTANT INFORMATION REQUIRED BY THE FCC □

THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT. □

Bluetooth Headset

User's Guide

BEFORE USING YOUR HEADSET

Please read this user's guide to get started, and to make the best use of the headset many features.

Product Specification

Bluetooth Specification: Bluetooth Version 2.0 compliant.

Power Level: Class II.

Support Profile: hand-Free, Headset (Headset role only).


Standby Time: 200 hours.

Talk Time: Up to 6 hours

Transmissions Range: 10 metres.

*Above mentioned standby time and talk time will be different depending to mobile phones setting and using environment. The figures above shows the average values tested by laboratory.

Your headset overview

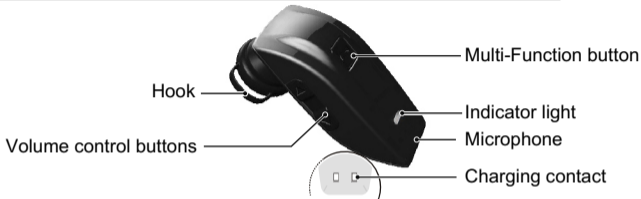


Charging the headset

Your headset uses a rechargeable battery. You must charge the battery fully before using the headset for the first time.

1. Put the headset in the supplied charging case and close the cover.



2. Plug the adapter into the case's charging socket.
3. Plug the adapter into the electrical outlet, the blue light will turn on.



4. Full charge the headset until the blue light turns off (approximately 2 hours), Remove the adapter from the case.



IMPORTANT

1. If you hear the low battery warning sound (beeps every 5 seconds) and the red indicator light is flashing every 5 seconds, that means the battery needs to be charged.
2. If you turn the headset on and the ending melody ("So-Me-Do") is immediately played, that also means the battery needs to be charged.
3. The headset is not functional while charging.

Storage of the headset

- Always store the headset with the power off and make sure it is safely protected.
- Avoid storage at high temperatures (above 40 C/104F). Such as in a hot vehicle or in direct sunlight. (Storage at high temperatures can damaged performance and reduce battery life).
- Do not expose the headset or any of its supplied parts to rain or other liquids.

BASIC OPERATIONS

Turning the headset on/off

- To turn the headset on, press and hold the Multi-Function button 2-4 seconds until you hear a long beep sound, release the button. The blue light will turn on for 3 seconds and then flash every 5 seconds.
- To turn the headset off, press and hold the Multi-Function button 2-4 seconds until you hear a short beep sound. Then, release the button, an ending melody ("So-Me-Do") will be played, and the headset turns off.

Note: If turn the headset on and leaving it unpaired with your phone for 5 minutes, the headset will automatically turn off to conserve battery power.

Pairing with your Bluetooth phone

Pairing will create a unique and encrypted wireless link between as your bluetooth phone and bluetooth headset.

1. Ensure that your phone's Bluetooth feature is on (see your phone's guide for details).
2. Ensure that the headset is off (see **Turning the headset on/off**).
3. Press and hold the Multi-Function button 2-4 seconds to turn the headset on, the blue indicator light will turn on for 3 seconds and then flash every 5 seconds.
4. Set your Bluetooth phone to discover the headset by following your phone's guide. Typically, the steps involve going to set up, Connect, or Bluetooth menu on your phone and the selecting the option to discover Bluetooth devices.
5. Your phone will find the headset and ask if you want to pair with it , Confirm this by pressing the Yes or OK key.
6. Enter a passkey or PIN, 0000 (4 zeros), the press the Yes or OK key.
7. Press Multi-Function button once to connect with your phone's. (You can also use the phone's connection function.)

If the above steps cannot be successfully done, please delete the pairing date (see **Deleting all pairing data**) and repeat steps 1-7.

To confirm your phone and headset are operating properly, make a test call:

1. Place the headset over your ear.
2. On your phone, dial the number you want to call and press the "send" key.
3. If paired successfully, you will hear the ring tone on the headset.

After headset is successfully paired , you don't need to repeat these initial setup steps each time you use the headset.

Wearing the headset

Wear the headset on your ear.
Depending on what ear you are going to wear the headset, simply adjust the hook accordingly.



▲ Left



▲ Right

Making a call

Making a voice activated call

If the voice recognition feature is on, you can make a voice activated call.

1. Press the Multi- Function button once, You will hear the voice-activation tone.
2. Say the name of the person you wish to call.

Depending on your phone, this feature may not be supported.

Redialing the last number

To make a call to the last number you have dialed, press and hold both volume control buttons, the release.



IMPORTANT

*Depending on your phone, you should press the multi-Function button briefly or press and hold it to redial the last number.

Ending a call

Press the Multi-Function button once.

Answering a call

After you hear the ring tone, press the multi-Function button once.

Transferring a call between phone and headset

If you answer the call with your phone, you can transfer the call to the headset by pressing simultaneously both volume control buttons once or , by using the transfer function of your phone.

You can also transfer the call from the headset to the phone by pressing simultaneously both Volume control buttons once or, by using the transfer function of your phone.

Rejecting a call

When you hear the ring tone, press and hold both Volume control buttons until you hear a short beep. The call will be rejected. Depending on your phone's setting or type, you may only be able to mute the ringer or this feature may not be supported.

Adjusting the volume

Press [▲] on the side of the headset to increase the volume level and [▼] to decrease the volume level.

Deleting all pairing data

When the headset is on and disconnected with the phone, the pairing information can be deleted by pressing and holding the Multi-Function button until a long beep sound is heard.



To prevent possible harm to the environment, please separate this from other types of waste and recycle it responsibly to promote the sustainable reuse of material resources.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation