

EaziTRAC 2000

Personal Tracking Device



User Manual

Cover page

CONTENTS

1. Getting Started.....1	2.7 Alert Mode
1.1 Device Specifications	2.8 Brightness Setting
1.2 Device Description	2.9 Delete All
1.3 Charging the Battery	2.10 Language
1.4 Hands free	3. Call Function.....16
1.5 Inserting and Removing of SIM card	3.1 Outgoing Call
1.6 Powering the Device ON & OFF	3.2 Incoming call
1.7 Emergency Button	4. Messaging.....17
1.8 Reset Button	4.1 Receiving SMS
1.9 Icons	4.2 Receiving Pager Message
2. Setting.....13	4.3 Reading Message
2.1 Phone List	4.4 Replying a Message
2.2 Hospital Mode	4.5 Deleting a Message
2.3 Clock	5. Battery Information.....19
2.4 Alarm	6. Health and Safety Information.....21
2.5 Ring Tone	7. Federal Communications Commission (FCC) Statement...24
2.6 Message Alert	


Contents page

1.1 Device Specifications

Dimension	86 (L) x 61 (W) x 21 (H) mm
Weight	110 grams
Standby Time	70 hours depending on network
Talk Time	2 hours depending on network
Marking	Rohs, FCC
Charger Input	100~240VAC, 50~60Hz, 600mA
Battery	3.7V 1300mAH Lithium polymer

Page 1

1.2 Device Description

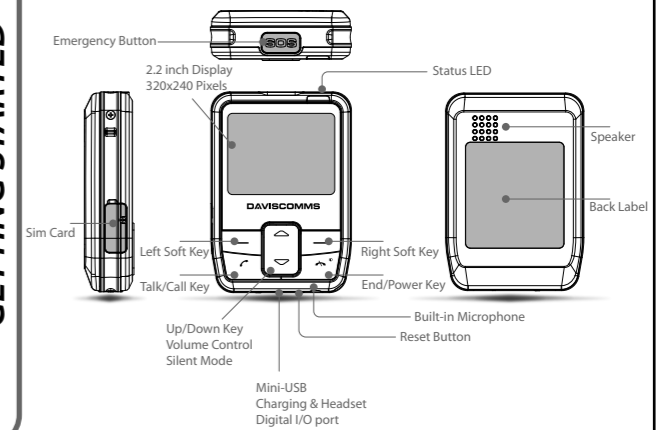


Page 2

Screen Lock and Unlock

Press the **End/Power Key** followed by the **Left Soft Key** to Lock or Unlock the screen.

Left and Right Soft Key

The roles of the soft keys vary depending on the function used. The keys below select the function desired when pressed.



Left Soft Key Right Soft Key


Page 3

Silent Mode Shortcut

- Press and hold the **Down Key** to switch to Silent mode in Main Screen.
- Press and hold the **Up Key** to switch to Normal mode in Main Screen.

Volume Control


Press the **Up/Down Key** to adjust the volume.




Note: The volume control will adjust the incoming ring tone and voice call volume only. Page and SMS alert volume are not adjustable.

Page 4


1.3 Charging the Battery



1. Plug the USB cable into the charger or to a computer USB port.



2. Insert the Charger into your wall power outlet



3. Peel open the USB cover from the end.


4. Plug the other end of the USB cable into the device.

LED Status:
- Red: Battery charging
- Green: Battery fully charged

Page 5

1.4 Handsfree

The device is designed to work with a 10 pins miniature USB headset. Refer to your place of purchase for the recommended headset.




1.5 Inserting and Removing SIM card




Failure to unplug the wall charger and power off the device before inserting or removing the SIM card may cause damage to both the SIM card and device.

Page 6


Inserting SIM Card



1. Unscrew the SIM card cover located at the side of the device.



2. Peel open SIM card cover.




3. Insert SIM card into the SIM card slot with the **Orientation** shown. Push and release only when a "click" sound is heard.

A small tool (paper clip) may help in pushing in the SIM card.

Page 7

Removing SIM Card



1. Push in the SIM card and release when a "click" sound is heard.



2. Pull out the SIM card.

Page 8


1.6 Powering the Device ON & OFF

To Power ON

- Press and hold the **End/Power key** in the Main Screen for 2 seconds, release and the device will power on with a white screen. After which the screen will show the word "Initializing". The device will show the main screen once start up completed.

To Power OFF


- Press and hold the **End/Power key** for 2 seconds, release and a confirmation prompt will appear.
- Select <Yes> to power off the device.



Page 9


1.7 Emergency Button

- Press to emit a continuous alert, send a SMS and make a call to the designated number.

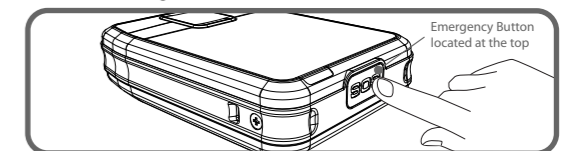

1.8 Reset Button

- Press to reset the device.

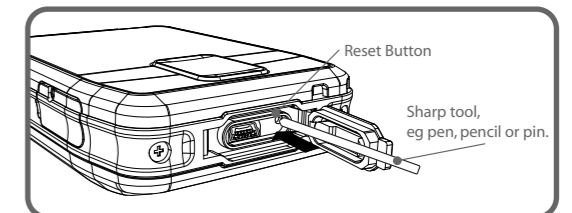

Page 10

1.9 Icons
Main Screen Icons

GSM	
GPS	
Paging	
Audio	
Alarm	
New Message	
Missed call	
Battery Gauge	

GETTING STARTED

11

Message Inbox Icons

Title Bar		
Message List		

GETTING STARTED

12

2.1 Phone List

- Select **MENU>PHONE LIST>** Select name/number.
- Select **<SMS>** Select canned message.

Choose **<SMS>** to send.

You are also able to send a message from the **Message Option**. refer to reply to a message section

2.2 Hospital Mode

- Select **MENU>HOSPITAL MODE>** Select ON/OFF.

2.3 Clock

Set Time

- Select **MENU>CLOCK>SET TIME>** Set hour value.
- Select **<NEXT>** Set minute value.
- Select **<NEXT>** Set AM/PM . Choose **<OK>** to set

Set Date

- Select **MENU>SET DATE>** Set date value.
- Select **<NEXT>** Set day value.
- Select **<NEXT>** Set year value. Choose **<OK>** to set.

SETTINGS

13

Set Time Zone

- Select **MENU>TIME ZONE>** Select time zone value. Choose **<OK>** to set.

Valid GMT time zones follow the UTC set (refer to command guide for value set).

Set Time Format

- Select **MENU>TIME FORMAT>** Select time format. Choose **<OK>** to set.

Set Date Format

- Select **MENU>DATE FORMAT>** Select date format. Choose **<OK>** to set.

2.4 Alarm

- Select **MENU>ALARM>** Set hour value
- Select **<NEXT>** Set minute value
- Select **<NEXT>** Set AM/PM.
- Choose **<OK>** to set.

SETTINGS

14

2.5 Ring Tone

- Select **MENU>RING TONE>** Select ring tone melody. Choose **<OK>** to set.

2.6 Message Alert

- Select **MENU>MESSAGE ALERT>SMS ALERT** or **PAGER ALERT>** Select alert type. Choose **<OK>** to set.

2.7 Alert Mode

- Select **MENU>ALERT MODE>** Select alert mode type. Choose **<OK>** to set.

2.8 Brightness Setting

- Select **MENU>DISPLAY SETTINGS>** Select brightness level. Choose **<OK>** to set.

2.9 Delete All

- Select **MENU>DELETE ALL>** YES to delete.

2.10 Language

- Select **MENU>LANGUAGE>** Select language type. Choose **<OK>** to set.

SETTINGS

15

3.1 Outgoing Call

- Press **Talk/Call key** to direct you to the phone list to make an Outgoing Call.
- Or
- Select **<CALL>** in response to an SMS.

3.2 Incoming call

To Accept a Call

- Press **Talk/Call key** to accept the call.

To End or Reject a Call

- Press **END/Power Key** to end the call or to reject an incoming call.

To Mute the Ring Tones

- Select **<MUTE>** during an incoming call to turn off the ring tone.

CALL FUNCTION

16

4.1 Receiving SMS

When an SMS is received, the popup box will display a New SMS Message Received.

4.2 Receiving Pager Message

When a Pager message is received, the popup box will display a New Pager Message Received.

MESSAGING

17

4.3 Reading Message

- Select **<MESSAGE>** on the Main Screen.
- Or
- Select **<VIEW>** on the New Message pop out Screen.

Note: A reminder alert at 5 minute intervals for unread messages when alert mode is set to audio or vibrate.

4.4 Replying a Message

- Select **<OPTION>** in the Message Screen.
- Select **<REPLY>** Select canned message.
- Choose **<SMS>** to reply.

4.5 Deleting a Message

- Select **<OPTION>** in the Message Screen.
- Choose **<DELETE>** to delete.

MESSAGING

18

Charging and discharging

Your device is powered by a rechargeable battery. The battery can be charged and discharged hundreds of times, but it will eventually wear out. Recharge your battery only with Daviscomms approved chargers designated for this device. Unplug the charger from the electrical plug and the device when not in use. Do not leave a fully charged battery connected to a charger, since overcharging may shorten its lifetime. If left unused, a fully charged battery will lose its charge over time. If the battery is completely discharged, it may take several minutes before the charging indicator appears on the display or before any calls can be made. Never use any charger that is damaged. Leaving the device in hot or cold places, such as in a closed car in summer or winter conditions, will reduce the capacity and lifetime of the battery. Always try to keep the battery between 15°C and 25°C (59°F and 77°F). A device with a hot or cold battery may not work temporarily, even when the battery is fully charged.

BATTERY INFORMATION

19

Do not dispose the device in a fire as they may explode. Dispose of device according to local regulations. Do not dispose as household waste. Do not dismantle the device. In the event of a battery leak, do not allow the liquid to come in contact with the skin or eyes. In the event of such a leak, flush your skin or eyes immediately with water, or seek medical help.

Warning:

Use only chargers and enhancements approved by Daviscomms for use with this particular model. The use of any other types may invalidate any approval or warranty, and may be dangerous. For availability of approved enhancements, please check with your dealer. When you disconnect the power cord of any enhancement, grasp and pull the plug, not the cord.

BATTERY INFORMATION

20

Read these simple guidelines.
Failure to comply may be dangerous or illegal.

- TURN ON SAFELY** Do not turn the product on when wireless product use is prohibited or when it may cause interference or danger.
- ROAD SAFETY COMES FIRST** Obey all local laws. Always free your hands to operate the vehicle while driving. Your first consideration while driving should be road safety.
- INTERFERENCE** All wireless products may be subject to interference. Turn the product off near medical equipment.
- TURN OFF IN HOSPITALS** Follow all restrictions. Turn the product off near medical equipment.
- TURN OFF IN AIRCRAFT** Follow any restrictions. Wireless devices can cause interference in aircraft.
- TURN OFF WHEN REFUELLING** Do not use the product at a refueling point. Do not use near fuel or chemicals.

HEALTH AND SAFETY INFORMATION

21

QUALIFIED SERVICE Only qualified personnel may install or repair this product.

WATER-RESISTANCE Your product is not water-proof. Keep it dry.

ENHANCEMENT Use only approved enhancements. Do not connect incompatible products.

Road Safety

- Your wireless product gives you the powerful ability to communicate by voice, anywhere and anytime. But an important responsibility accompanies the benefits of wireless products, one that every user must uphold.
- When driving a car, driving is your first responsibility. When using your wireless product while driving, follow local regulations in the country or region you are in.

HEALTH AND SAFETY INFORMATION

22

Hearing Aids

- Some digital wireless products may interfere with some hearing aids. In the event of such interference, you may wish to consult your hearing aid manufacturer to discuss alternatives.regulations in the country or region you are in.

Potentially Explosive Environments

- Turn off your product when in any area with a potentially explosive atmosphere, and obey all signs and instructions. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death.

- Areas with a potentially explosive atmosphere are often but not always clearly marked. They include the areas below deck on boats, chemical transfer or storage facilities, vehicles using liquified petroleum gas, such as propane or butane, areas where the air contains chemicals or particles, such as grain, dust or metal powders, and any other area where you would normally be advised to turn off your vehicle engine.

HEALTH AND SAFETY INFORMATION
23

Federal Communications Commission (FCC) Statement

15.21
You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the

FCC STATEMENT
24

equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules.Operation is subject to the following two conditions:

- 1) this device may not cause harmful interference and
- 2) this device must accept any interference received, including interference that may cause undesired operation of the device.

FCC RF Radiation Exposure Statement:

For body worn operation, this phone has been tested and meets FCC RF exposure guidelines when used with an accessory that contains no metal and that positions the handset a minimum of 1.3cm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. SAR Max. Value is 0.846W/Kg(1g)

FCC STATEMENT
25

DAVISCOMMS

DAVISCOMMS (S) PTE LTD
Block 70 Ubi Crescent #01-07 | Ubi TechPark | Singapore 408570

500286R01