



USER'S GUIDE

5" Smart Baby Monitor with Night Light

Nursery Pal Shimmer

The Features described in this user's guide are subject to modifications without prior notice.

Welcome...

to your new Hubble Smart Video Baby Monitor!

Thank you for purchasing the Smart Video Baby Monitor. Now you can see and hear your baby sleeping in another room or you can monitor your older children in their play room. Our Connected Baby Monitor let you see your baby from the hand-held viewer, or from your smartphone. Watch over and communicate with your baby from anywhere in the world.

Please retain your original dated sales receipt for your records. For warranty service of your Hubble product, you will need to provide a copy of your dated sales receipt to confirm warranty status. Registration is not required for warranty coverage.

For product related questions, please contact:

Live Chat: hubbleconnected.com

Email: support@hubbleconnected.com

<https://hubbleconnected.com/warranty>



<https://hubbleconnected.com/apps/product-registration>

Visit **support.hubbleconnected.com** to download the User Guide with instructions, answers to frequently asked questions, and more to help you get the most from your product.

Got everything?

- 1 x Parent Unit
- 1 x Baby Unit (Camera Unit)
- 2 x Power adaptors for the Parent and Baby units

Overview of Your Baby Unit











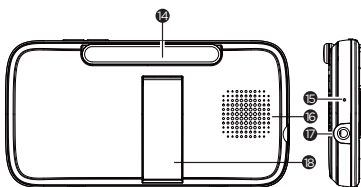


1. Light Sensor
2. Camera Lens
3. Infrared LEDs (x8, for night vision)
4. Power/Link indicator
5. High Sense Microphone
6. Night Light
7. Antenna
8. Speaker
9. PAIR button
10. Power Socket
11. Temperature Sensor

Important guidelines for installing your Baby Monitor

















- To use your Video Monitor Baby and the Parent Unit together, you must be able to establish a radio link between them, and the range may be affected by environmental conditions.
- Any large metal object, like a refrigerator, a mirror, a filing cabinet, metallic doors or reinforced concrete between the Baby and Parent Units may block the radio signal.
- The signal strength may also be reduced by other solid structures, like walls or electrical equipment, such as radios, TVs, computers, cordless or mobile phones, fluorescent lights or dimmer switches.
- Use of other 2.4 GHz products, such as wireless networks (Wi-Fi® routers), Bluetooth® systems, or microwave ovens, may cause interference with this product, so keep the Baby Monitor at least 1.5 metres (5 feet) from these types of products, or turn them off if they appear to be causing interference.
- If the signal is weak, try moving the Parent and/or the Baby Unit to different positions in the rooms.

Overview of the Parent Unit



- 1. Display (LCD screen)**
- 2. Charging LED**
RED when mains power connected.
- 3. Parent Unit ON/OFF LED (Green)**
- 4. Sound Level indicators (Green, Amber, Red, Red)**
Show the sound level detected by the Baby Unit - the louder of sound detected, the more LEDs light up.
- 5. Volume -**
Press to decrease Volume level.
- 6. Volume +**
Press to increase Volume level.
- 7. Display ON/OFF button** 
Press to turn the LCD screen ON/OFF (Note: audio is maintained.)
- 8. Microphone**
- 9. MENU button** 
Press to open / close the Menu options.
- 10. Navigation button**    
Move Up/Down/Right/Left menu options.
- 11. OK button** 
- 12. TALK button** 
Press and hold to speak to your baby.
- 13. Power button** 
Press and Hold to turn the Parent Unit ON/OFF.
- 14. Antenna**
- 15. RESET pin hole** (recessed - use small pin)
- 16. Speaker**
- 17. Power Socket**
- 18. Stand**

Overview of the Parent Unit

	Signal Level (4 Levels)
	Night Vision Mode (Video also changes to Black/White).
	Indicates the screen off timer is set.
	Volume Level Control (5 Levels).
	No Baby Unit detected.
	Battery Level Indication (4 Levels).
	Zoom Level Control (1X, 2X).
	Night Light
	LCD Brightness Level Control (5 Levels).
	Alarm Setting (2h, 3h, 4h, 5h or 6h) On status bar, indicates alarm set, and when flashing, that alarm time has been reached or missed.
	Temperature scale select (°C/°F) Readings display in WHITE, but turn RED if > 29 °C / 84 °F or < 14 °C / 57 °F. Displays HH °C / °F if >36 °C / 97 °F. Displays LL °C / °F if < 1 °C / 34 °F.
	Set Screen Off Timer (Off  , 5 mins, 30 mins, 60 mins).
	Add Camera
	Delete Camera
	View multiple cameras on screen. Available when you have more than 1 Baby Unit (Camera).

Important guidelines for installing your Digital Video Baby Monitor

- To use your Baby Unit and Parent Unit together, you must be able to establish a radio link between them, and the range will be affected by environmental conditions.
- Any large metal object, like a refrigerator, a mirror, a filing cabinet, a metallic door or reinforced concrete, between the Baby Unit and Parent Unit may block the radio signal.
- The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TVs, computers, cordless or mobile phones, fluorescent lights or dimmer switches.
- If the signal is poor, try moving the Parent Unit and/or the Baby Unit to different positions in the rooms.

Table of contents

1. Safety Instructions	8
2. Getting Started	11
2.1 Connecting the power supply for the Baby Unit	11
2.2 Connecting the Power Supply of the Parent Unit	11
2.3 Desktop Stand of the Parent Unit	12
3. Using the Baby Monitor	13
3.1 Power on or off the Parent Unit.....	13
3.2 Turn off the Parent Unit screen	13
3.3 Night Vision Mode	13
3.4 Talk Mode.....	13
3.5 Adjust the speaker volume for Parent Unit.....	14
3.6 Zoom.....	14
3.7 Set Night Light.....	14
3.7.1 Night Light brightness control	14
3.7.2 Night Light colour control.....	14
3.7.3 Set timer for Night Light.....	14
3.8 Adjust the LCD brightness of the Parent Unit	14
3.9 Set the alarm on the Parent Unit	15
3.10 Temperature Setting.....	15
3.11 Set the screen off time of the Parent Unit.....	16
3.12 Pair and replace extra new Baby Unit	16
3.13 Delete a Baby Unit.....	17
3.14 Multi-Camera Use	17




4. Wi-Fi® Internet Viewing	18
4.1 Minimum System Requirements	18
4.2 Getting started - Connecting Devices	18
4.3 Setup	19
4.4 User Account and Camera Setup on Android™ Devices or iPhone®/ iPad®	19
4.4.1 Power ON and Connect the Camera	19
4.4.2 Download HubbleClub by Hubble Connected App	19
4.4.3 Sign up with Hubble on your smart device	20
4.4.4 Add the Camera to your account	21
5. Disposal of the Device (environment)	24
6. Cleaning	24
7. Help	25
8. General Information	32
9. Technical Specifications	36



1. Safety Instructions

WARNING:

STRANGULATION HAZARD - Keep the unit and adaptor cord more than 1 metre from the cot and out of the baby's reach. **NEVER** place Baby Unit or cords within the cot. Secure the cords more than 1 metre away from the baby's reach. Never use extension cords with AC Adaptors. Only use the AC Adaptors provided.

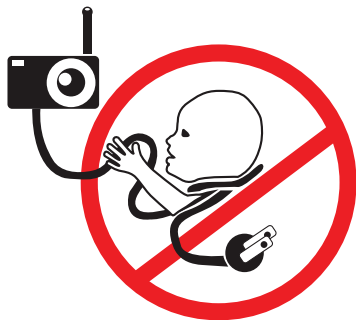

BABY UNIT SET UP & USE:

- Determine a location for the BABY UNIT that will provide the best view of your baby in his/her cot.
- Place the BABY UNIT on a flat surface, such as a dresser, bureau, or shelf or mount the Unit to a wall securely using the keyhole slots under the stand.
- NEVER place the Baby Unit or cords within the cot.

WARNING

This Baby Monitor is compliant with all relevant standards regarding electromagnetic fields and is, when handled as described in the User's Guide, safe to use. Therefore, always read the instructions in this User's Guide carefully before using the device.

- Adult assembly required. Keep small parts away from children when assembling.
- This product is not a toy. Do not allow children to play with it.
- This Baby Monitor is not a substitute for responsible adult supervision.
- Keep this user's guide for future reference.
- Keep the cords out of reach of children.
- Do not cover the Baby Monitor with a towel or blanket.
- Test this monitor and all its functions so that you are familiar with it prior to actual use.
- Do not use the Baby Monitor in damp areas or close to water.
- Do not install the Baby Monitor in extreme cold or heat, direct sunlight, or close to a heat source.
- Only use the chargers and power adaptors provided. Do not use other chargers or power adaptors as this may damage the device and battery pack.
- Only insert a battery pack of the same type.
- Do not touch the plug contacts with sharp or metal objects.
- Connect the power adaptors to easily accessible electrical sockets.





WARNING:

There is a risk of explosion if the battery is replaced by an incorrect type.

Dispose of used batteries according to their instructions.


To reduce risk of fire or burns.

- Do not attempt to disassemble, or service the battery pack.
- Do not crush, puncture, short external contacts, or dispose of in fire or water.
- Do not heat above 60°C (140°F).
- Use specific charger only.
- Replace only with the battery pack designated for this product.
- high or low extreme temperatures that a **battery** can be subjected to during use, storage or transportation; and
- low air pressure at high altitude.
- disposal of a **battery** into fire or a hot oven, or mechanically crushing or cutting of a **battery**, that can result in an **explosion**;
- leaving a **battery** in an extremely high temperature surrounding environment that can result in an **explosion** or the leakage of flammable liquid or gas; and
- a **battery** subjected to extremely low air pressure that may result in an **explosion** or the leakage of flammable liquid or gas.



2. Getting Started

2.1 Connecting the power supply for the Baby Unit



- Insert the DC plug of the power adaptor into the DC socket on the back of the Baby Unit.
- Connect the other end of the power adaptor to mains power.
- The Green power indicator lights when the baby unit is on.


Note:


Only use the power adaptor (5VDC, 1000mA) provided.


2.2 Connecting the Power Supply of the Parent Unit

The parent unit contains a rechargeable battery (Lithium ion 2100mAh). This allows you to move the parent unit without losing the link and picture from the Baby Unit. We recommend charging the parent unit for at least 16 hours before first use, and when the Parent Unit indicates the battery is low.


- Install the battery into the battery compartment according to the polarity markings inside, slide the battery cover back as shown below.

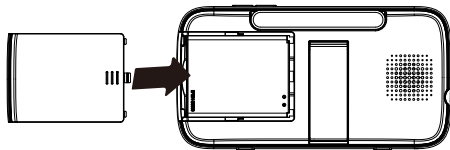

- Connect the small plug of the power adapter to the parent unit and the other end to mains power. Only use the enclosed adapter (5VDC/1000mA).
- Press and hold the  button to turn the Parent unit on, the Parent unit and Baby unit are automatically linked and ready to use.

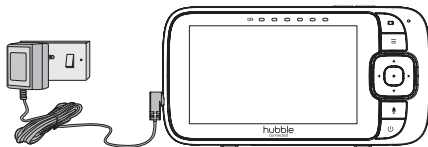


Note:

When the Baby and Parent Units are both turned on and within range, the Parent Unit should show a colour image from the Baby Unit camera, but if the room is dark, the image will be in black and white, with an  icon showing the Baby Unit is in Night Vision mode.

2.3 Desktop Stand of the Parent Unit

- The parent unit comes with a desktop stand attached to the back of the parent unit.
- To place the parent unit on a desk, simply pull out the stand, as shown.



Note:

Place the parent unit on a





3. Using the Baby Monitor

Please read these instructions carefully, and be aware that this baby monitor is only intended as an aid. It is not a substitute for responsible, correct parental supervision.

Note:

Do not place the Baby Unit within the baby's reach! If there is interference with the picture or sound, try moving the units to different locations, and ensure they are not close to other electrical equipment.

3.1 Power on or off the Parent Unit

Press and hold  to turn on the Parent Unit. The Power indicator light turns on. Press and hold  again to turn off the Parent Unit. The Power indicator light turns off.

NOTE

If you place the parent and Baby Units too close together, you may hear echoing sounds and interference. This is not a fault. The units are designed to be operated at some distance apart, (e.g. in separate rooms) so move the units further apart.


3.2 Turn off the Parent Unit screen

You can turn on or off the Parent Unit screen without powering off the Parent Unit. You can still hear sound from the Baby Unit.


Short Press  on the Parent Unit to turn off the screen.


Press any key on the Parent Unit to turn on the screen again.

3.3 Night Vision Mode

The Baby Unit has infra-red LEDs for picking up clear images in the dark. When the built-in light sensor on the front of the unit detects a low level of ambient light, the LEDs will activate automatically and the screen on the Parent Unit will display in black and white. The  icon will be displayed at the top of the screen.

3.4 Talk Mode

Press and hold the TALK button  on the Parent Unit to talk to your baby through the Baby Unit's speaker.

The  icon will be displayed at the top of the LCD screen.



3.5 Adjust the speaker volume for Parent Unit

You can adjust the speaker volume from **Volume 1** to **Volume 5**, or turn it off. Press ▲⏮+ or ▼⏭- on the Parent Unit when it is in camera viewing mode. When the speaker volume is set to off, the screen displays 🔇.

3.6 Zoom

You can zoom in or out while viewing the image from Baby Unit.

1. Press ▶⊕ to zoom in.
2. Press and hold ◀, ▶⊕, or ▲⏮+ or ▼⏭- to move the zoomed image left, right, up or down correspondingly.
3. Press ◀ to zoom out.

3.7 Set Night Light

1. Press ☰ when the Parent Unit is in camera viewing mode.
2. Press ◀ or ▶⊕ to scroll to ☀ and press ● button.
3. Press ▲⏮+ or ▼⏭- to choose **On**, then press ● button.

3.7.1 Night Light brightness control

- When ✓ (On) is selected, you can scroll ▲⏮+ or ▼⏭- to select ☀ and confirm with ● button. There are 3 brightness levels for selection.

3.7.2 Night Light colour control

- When ✓ (On) is selected, you can scroll ▲⏮+ or ▼⏭- to select 🌈 and confirm with ● button.
- Scroll ▲⏮+ or ▼⏭- to select one of the 7 colours or 🔄 auto looping.

3.7.3 Set timer for Night Light

- When the Night Light is On, press ▲⏮+ or ▼⏭- to select ☀ and confirm with ● button, you can scroll ▲⏮+ or ▼⏭- to select night light off after 5h~9h and confirm with ● button.
- Press ☰ to confirm and exit.

3.8 Adjust the LCD brightness of the Parent Unit

You can adjust the brightness of the Parent Unit screen from Level 1 to Level 5.


















1. Press ☰ when the Parent Unit is in camera viewing mode. ☀ is displayed and press ● button.
2. Press ▲⏮+ or ▼⏭- to adjust the brightness.
3. Press ● button to confirm your selection.








3.9 Set the alarm on the Parent Unit


You can use the Parent Unit to set the alarm as a reminder for you to take care of your baby.


Turn on and set the alarm when it is currently off:


1. Press  when the Parent Unit is in camera viewing mode.
2. Press  or  to scroll to  and press  button.
3. Press  + or  - to choose  (On), then press  button.
4. Press  + or  - to choose **2h, 3h, 4h, 5h** or **6h**. (The default setting is Alarm OFF.)
5. Press  button to confirm your selection.
6. If an alarm time is selected  will appear on the display and, after the alarm time is reached, the parent unit will beep about every 10 seconds and flash the alarm icon, until any button is pressed.





3.10 Temperature Setting






1. Press the  button and the menu bar will pop up.
2. Press the  or  until  is highlighted.
3. Press the  button to show the temperature options.

The temperature setting  /  /  will pop up.

Temperature Format  - to select either Centigrade **°C** or Fahrenheit **°F**.

Temperature Limit  to define the High temperature limit **MAX** (25-39°C/77-102°F) and Low temperature limit **MIN** (10-24°C/50-76°F).











Temperature Alert  - Turn the temperature alert  (On), the Parent Unit will beep and display Temperature High  or Temperature Low  when the temperature at the Baby Unit is detected above or below the maximum or minimum temperature limits you set.

4. Press the  + or  - to select your setting and confirm by pressing the  button.



3.11 Set the screen off time of the Parent Unit

You can set the screen off time of the Parent Unit after being in idle mode for a particular time interval.

1. Press  when the Parent Unit is in camera viewing mode.
2. Press  or  to scroll to  and press  button.
3. Press   or   to select **60m**, **30m**, **5m** or **OFF** for the parent unit video to turn off after **5 mins**, **30 mins** or **60 mins** if no buttons have been pressed.
4. Press  button to confirm your selection.
5. The audio will remain on, and you can press any button to turn the video screen back on.

Note:











If there are multiple cameras in scan mode, the audio will switch about every 30 seconds.

3.12 Pair and replace extra new Baby Unit

The Baby Units and Parent Unit provided are already paired. You can add or replace a Baby Unit in your video and audio monitoring system.

You can pair a maximum of four Baby Units to your Parent Unit. Each new Baby Unit must be paired to the Parent Unit before use.

To pair and replace a Baby Unit:

1. Press  when the Parent Unit is in camera viewing mode.
2. Press  or  to scroll to  and press  button.
3. Press   or   to choose a desired Baby Unit number, then press  button. The pairing mode starts.
4. Turn on the new Baby Unit, and then immediately press and hold Pair button until the Power/Link indicator turns on.















Note:

If you choose an occupied Baby Unit slot, the new Baby Unit will replace the existing Baby Unit.



3.13 Delete a Baby Unit


You can choose to remove a paired Baby Unit from the Parent Unit.

1. Press  when the Parent Unit is in camera viewing mode.
2. Press  or   to scroll to .
3. Press  + or  - to select the desired Baby Unit (Cam1, 2, 3 or 4).
4. Press  button, then  or   to choose YES (✓) or NO (X).
5. Press  button to confirm your selection.

Note:

You cannot delete a Baby Unit if it is the only one paired.



3.14 Multi-Camera Use

Up to 4 cameras can be paired with the Parent Unit, and if more than one camera is linked to the Parent Unit, you can select which camera to view or set it in Patrol mode , where the Parent Unit automatically steps through the paired cameras about every 15 seconds.

Note:

The audio from a camera is only heard at the Parent Unit when that camera is selected.

To change the camera being viewed:

1. Press  button when the Parent Unit is in camera viewing mode to step through the paired cameras, 1, 2, 3, 4, , with the selected option shown on the screen.



4. Wi-Fi® Internet Viewing

4.1 Minimum System Requirements

Android™ System

- Version 8.0 or above

iPhone®/iPad® iOS


- Version 12.0 or above

High Speed (Wi-Fi®) Internet

- At least 0.6 Mbps upload bandwidth per camera (you can test your internet speed on this site: <http://www.speedtest.net>)

4.2 Getting started - Connecting Devices

How does it work?

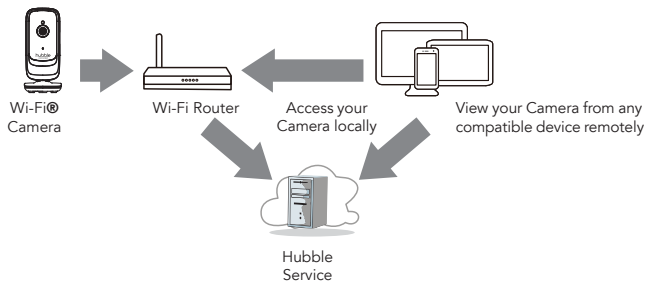

When a user tries to access the Camera, our Hubble server authenticates the user's identity and permits access to the Camera.



4.3 Setup

Connect the Wi-Fi® Camera to the Power Adaptor, then plug into mains power. The Camera must be within range of the Wi-Fi® router with which you want to connect. Make sure the password of the router is available for entering during the in-app setup process.

Status of LED Indication:

- Pair / Setup state: LED is Flashing Green.
- Unconnected state: LED is Flashing Red.
- Connected state: LED is Solid Green.

Note: You can only setup via a compatible smartphone or tablet only.

4.4 User Account and Camera Setup on Android™ Devices or iPhone®/iPad®

What you need

- Wi-Fi® Camera Unit
- Power adaptor for the Camera
- Device with Android™ system version 8.0 and above
- Or iPhone®/iPad® with iOS version 12.0 and above

4.4.1 Power ON and Connect the Camera

- Switch the parent unit off before connect the camera to Wi-Fi®.
- Connect the power adaptor to mains power and insert the plug into the power socket on the back of the Camera Unit, the unit turns on.

4.4.2 Download HubbleClub by Hubble Connected App



- Scan the QR code with your smart device and download **HubbleClub by Hubble Connected** App from the App Store for iOS devices or from the Google Play™ Store for Android™ devices.
- Install **HubbleClub by Hubble Connected** App on your device.



4.4.3 Sign up with Hubble on your smart device

- Ensure that your smart device is connected to your Wi-Fi® router.
- Run **HubbleClub by Hubble Connected App**, tap **Create Account** with Hubble (fig.1), read through the Privacy Policy, Terms and Conditions, by signing up you agree to our terms of service, tap **Done** (fig.2).




fig.1




fig.2

- Follow the steps to enter your account information and sign up with Hubble (fig.3-6).




fig.3




fig.4




fig.5




fig.6

Note: If you already have a **HubbleClub by Hubble Connected App** account, please tap **Log in with Hubble** to go to the next steps.



4.4.4 Add the Camera to your account

- Log in your Hubble Account by entering “User Name” and “Password” (fig.7).
- Tap **Add Your Device** on the screen of your device to add new Camera (fig.8)




fig.7




fig.8

- To select your device for setting up by tapping **Baby Monitor** (fig.9).
- Tap **Nursery Pal Shimmer** to add the new camera (fig.10) .



fig.9




fig.10



- The following setup instructions will appear on the screen, select your Wi-Fi network and enter "Password" (fig.11).
- Power on your camera and wait for the LED to flash Red on the camera. Press and hold the PAIR button on the side of Camera, you will hear a voice prompt "Ready for Pairing" then tap **Next** (fig.12, fig.13)



fig.11



fig.12



fig.13

- Tap Generate QR code on your device and hold the QR code 15 to 30cm in front of Camera until you hear confirmation message "Scanning Success" from your device. (fig.14, fig.15)




fig.14



fig.15



- Tap **Continue**, it will take a few minutes for the Camera to connect to the Wi-Fi® network before showing the connection status (fig.16).
- The Camera has been successfully connected, name your Camera (fig.17).
- Tap **Finish** to complete the camera setup with Hubble.



fig.16




fig.17

Note: If connection fails, please tap Retry and repeat the steps starting from 4.4.4.

- Add your baby's profile to track your baby growth by tapping Create New Profile (fig.18).
- Enter your baby information and tap Done to create profile (fig.19).
- Select one of the profiles for your baby when using the Camera (fig. 20).




fig.18




fig.19




fig.20



5. Disposal of the Device (environment)

At the end of the product life cycle, you should not dispose of this product with normal household waste. Take this product to a collection point for the recycling of electrical and electronic equipment. The symbol on the product, user's guide and/or box indicates this.

Some of the product materials can be re-used if you take them to a recycling point. By reusing some parts or raw materials from used products you make an important contribution to the protection of the environment.

Please contact your local authorities in case you need more information on the collection points in your area.

The internal battery should be disposed of with the Parent unit in an environmentally-friendly manner according to your local regulations.

6. Cleaning

Clean the Baby Monitor with a slightly damp cloth or with an anti-static cloth. Never use cleaning agents or abrasive solvents.

Cleaning and care

- Do not clean any part of the product with thinners or other solvents and chemicals – this may cause permanent damage to the product which is not covered by the warranty.
- Keep the Baby Monitor away from hot, humid areas or strong sunlight, and don't let it get wet.
- Every effort has been made to ensure high standards of reliability for your Baby Monitor. However, if something does go wrong, please do not try to repair it yourself – contact Customer Service for assistance.

IMPORTANT



Always switch off and disconnect the power adaptor before cleaning your baby monitor.



7. Help

Display

No display

- Try recharging the battery pack.
- Reset the Units. Unplug both the Units' electrical power, then plug them back in.
- Is the Unit switched on?
- Press and hold the ON/OFF button  on the Parent Unit for 3 seconds to switch it ON.
- Is the correct camera selected? Change the camera number, if necessary.
- Is the video display turned on? Press the VIDEO ON/OFF button  to turn it ON.
- When operating using batteries only, the display will go blank after 5 minutes or 15 minutes or 30 minutes to save power (depending on video settings). The Unit is still active and will give you audio alerts. You can reactivate the screen by pressing any button.

Registration

If the Baby Unit has lost its link with the Parent Unit

- If the Baby Unit is too far away it may be going out of range, so move the Baby Unit closer to the Parent Unit.
- Reset both the Parent Unit and Baby Unit by disconnecting them from the electrical power. Wait about 15 seconds before reconnecting. Allow up to one minute for the Baby Unit and the Parent Unit to synchronize.
- See 2.3 Registration (Pairing), if there is a need to re-register the Units.

Interference

Noise interference on your Parent Unit

- Your Baby and Parent Units may be too close. Move them further apart.
- Make sure there is at least 1 to 2m between the 2 Units to avoid audio feedback.
- If the Baby Unit is too far away, it may be out of range. Move the Baby Unit closer to the Parent Unit.



- Make sure that the Baby and Parent Units are not near other electrical equipment, such as a television, computer or cordless/mobile telephone. Move the Baby Unit or Parent Unit 3 feet away from other electrical equipment.
- Use of other 2.4 GHz products, such as wireless networks (Wi-Fi® routers), Bluetooth™ systems, or microwave ovens, may cause interference with this product. Keep the Baby Unit or Parent Unit at least 3 feet away from these types of products, or switch them off if they appear to be causing interference.
- If the signal is weak, try moving the Parent and/or Baby Unit to different positions in the rooms.

Noise interference on your device

- To avoid background noise or echoes, ensure that there is enough distance between your device and the Wi-Fi® Camera Unit.
- Use of other 2.4 GHz products, such as Bluetooth™ systems or microwave ovens, may cause interference with this product. Keep the Wi-Fi® Camera Unit at least 3 feet away from these types of products, or switch them off if they appear to be causing interference.

Lost connection

- Check your Wi-Fi® settings. If necessary, reconnect your Wi-Fi®. Ensure that the Wi-Fi® Camera Unit is switched ON. Wait a few minutes to make the connection with the Wi-Fi® system.

If you forgot your password

- If you do not remember your password, tap Forgot Password and submit your e-mail address. A new password will be sent to your e-mail address immediately.



Troubleshooting for Wi-Fi® Internet Viewing

Category	Problem Description / Error	Solution
App	Cannot find my product model at "Add Camera"	There are more than one Hubble App. Check if you download correct App "HubbleClub By Hubble Connected"
Account	I am unable to login even after registration.	Please check your user name and password.
Account	I receive an error message saying: "Email ID is not registered".	Please ensure that you have registered with us. Tap Create Account to create an account.
Account	What do I do if I forgot my password?	Click on the "Forgot Password" link on https://app.hubbleconnected.com/#lostpassword OR on your Android™ or iOS application. An email will be sent to your registered email address.
Account	I am unable to receive a new password although I have used the "Forgot password" option.	<ol style="list-style-type: none"> 1. The e-mail might have been sent to your Junk Mail Folder. Please check your Junk Mail Folder. 2. There might be a delay in getting your e-mail. Please wait a few minutes and refresh your email account.



Connectivity Issues	I get a message: We are having problems accessing your camera. This could be due to lack of internet connection. Please wait and try again later.	<ol style="list-style-type: none"> 1. Please try again in a few minutes. This could be because of any issue with your internet connection. 2. If the problem remains, please restart your Camera to check if this fixes the problem. 3. Please restart your WIFI Router.
Viewing Camera	When I am in "remote mode", the video stops after 5 minutes. How do I view for longer?	<p>When you are accessing your Camera via a network different from your home network (over the internet) your video times out after 5 minutes.</p> <p>You can click on the Camera again from the Android™/iOS application to start streaming again.</p> <p>If you are accessing from your webbrowser, then you can press on the Reload button to start viewing your Camera video stream again.</p>
Features	The sound alert setting threshold is not right.	You can Adjust Sound Sensitivity to trigger notifications under Camera Setting menu.
Setting Up	While I am adding a new Camera to my account, I am not able to find any Cameras to add.	If you are trying to add a Camera which has previously been added into your account or another account, you will first have to reset the Camera. This can be done by following the re-setting procedure stated in section 6 of this guide. Switch the parent unit off before connecting the camera to Wi-Fi®.



General	What is the significance of the camera LED?	<p>Pair / Setup state: LED is Flashing Green.</p> <p>Unconnected state: LED is Flashing Red.</p> <p>Connected state: LED is Solid Green.</p> <p>Green: The camera is live streaming.</p> <p>LED Off - Power off / User turn off by Camera App setting.</p>
Connectivity issues	I am not able to access my Camera.	Please check if the Camera is within Wi-Fi® range. Please try to move the Camera closer to the router for better Wi-Fi® connectivity and try again.
Setting Up	During setup on devices for Android™ and iOS, I am not able to find my Camera during the last step and the setup fails.	Please reset the Camera to setup mode and try again. Press and hold the PAIR button on the side of the camera until you hear a beep and voice prompt 'Ready for pairing'. When the Camera LED is off, this indicates that it is in setup mode. Add camera in HubbleClub by Hubble Connected App.
Connectivity Issues	Even though I am accessing my Camera from the same Wi-Fi® network, I still find my Camera is shown as remote. I can only access it for 5 minutes at a time.	Please check your wireless router settings. For example, for Buffalo brand routers there is an option called Wireless Isolation. Please disable this option.



Camera	When I try to view the Camera, I get a prompt for Camera firmware upgrade. What should I do?	Please upgrade your firmware. This takes around 5 minutes. We push upgrades from time to time to improve the Camera features.
General	Which platforms are supported for accessing my Camera?	Minimum requirement: Android™ 8.0 iPhone®/iPad® iOS version 12.0
General	I do not hear any sound when I am accessing a remote Camera.	You can tap on the speaker icon in the video stream screen to hear audio. By default the audio is not ON when you are accessing a remote Camera.
General	What is the meaning of "Local Camera" and "Remote Camera"?	When you are accessing your Camera from the same wireless network (Home) in which it is configured, it is a Local Camera. When you are accessing your Camera away from your home it is a Remote Camera. You may be using 3G, 4G or 4G LTE or a Wi-Fi® connection outside of your home.



General	How do I download the App for Android™ and iOS devices?	<p>Android™:</p> <ul style="list-style-type: none"> – Open the Google Play Store on your Android™ device. – Select Search – Type in “HubbleClub by Hubble Connected” – The results will show the Hubble App – Select to install it <p>iOS Device:</p> <ul style="list-style-type: none"> – Open the App Store™ – Select Search – Type in “HubbleClub by Hubble Connected” – The results will show the Hubble App – Select to install it
Setting up	When the video is cut off, the application attempts to reconnect and this results in lost sound and choppy video.	You will need to turn off the Auto Lock function of your device to ensure continuous video/audio streaming.
Features	How many users can access the Camera at one time?	If you are accessing in Local Mode, two users are supported, after two users all streaming will go through the remote server. This allows for unlimited user access to a single Camera at one time.
Connectivity issues	I found interference caused by my other webcam devices.	Video streaming performance is related to internet bandwidth, especially if you have 2 or more video streaming devices that are working through the same router.



8. General Information

If your product is not working properly, read this User Guide.

Contact Customer Service:

Live Chat: hubbleconnected.com

Email: support@hubbleconnected.com

<https://hubbleconnected.com/warranty>

<https://hubbleconnected.com/apps/product-registration>

Consumer Products and Accessories Limited Warranty ("Warranty")

Thank you for purchasing this Hubble Smart Nursery branded product manufactured by Hubble Baby (HK) Limited ("HUBBLE").

What Does this Limited Warranty Cover?

Subject to the items listed below in the section "What is not Covered" HUBBLE warrants that this Hubble connected branded product ("Product") will be free from defects in material and workmanship under normal use for a period of 1 year from the date of purchase and that any certified accessory ("Accessory") sold for use with this product will be free from defects in materials and workmanship under normal use for a period of 90-days from the date of purchase. This Limited Warranty is your exclusive warranty and is not transferable.

What is not covered?

This Limited Warranty excludes and does not cover:

- Normal deterioration or wear resulting from use;
- Damage caused by or resulting from misuse, abuse, or accident;
- Damage caused by or resulting from improper operation or storage;
- Damage caused by or resulting from contact with foreign substances, including, but not limited, to liquid, water, rain, humidity, perspiration, sand, dirt, and/or food;
- Damage caused by or resulting from the use of Non-Hubble Smart Nursery branded or certified Products or Accessories or other peripheral equipment;



- Damage caused by or resulting from modifications, alterations, tampering, improper installation, or repairs by someone other than Hubble connected or their authorized representatives;
- Defects, damages, or the failure of Products or Accessories due to any communication service or signal you may subscribe to or use with the Products or Accessories; and,
- Periodic maintenance, repair and replacement of parts due to normal wear and tear.

What Other Limitations Are There?

THIS LIMITED WARRANTY SETS FORTH THE ENTIRE LIABILITY OF HUBBLE AND CONTAINS YOUR SOLE AND EXCLUSIVE REMEDY. OTHER THAN THIS LIMITED WARRANTY, HUBBLE MAKES NO ADDITIONAL REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IF YOUR STATE DOES NOT PERMIT THE DISCLAIMER OF WARRANTIES, THEN THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE IS LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. REPAIR OR REPLACEMENT IS YOUR SOLE AND EXCLUSIVE REMEDY AGAINST HUBBLE AND Hubble Smart Nursery. IN NO EVENT SHALL HUBBLE OR Hubble Smart Nursery's LIABILITY TO REPAIR OR REPLACE YOUR PRODUCT OR ACCESSORY EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT AND ACCESSORY AND HUBBLE AND Hubble Smart Nursery's TOTAL LIABILITY FOR DAMAGES ARISING FROM THIS LIMITED WARRANTY SHALL NOT EXCEED THE PRICE YOU PAID FOR THE PRODUCT AND ACCESSORY REGARDLESS OF WHETHER SUCH CLAIM ARISES UNDER CONTRACT, STATUTE, TORT OR OTHERWISE. IN NO EVENT AND UNDER NO CIRCUMSTANCES WILL HUBBLE OR Hubble Smart Nursery BE LIABLE FOR DIRECT, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE ABILITY OR INABILITY TO USE



THE PRODUCTS OR ACCESSORIES. ALL DISCLAIMERS, LIMITATIONS OF LIABILITY AND MODIFICATIONS OF WARRANTIES STILL APPLY EVEN IF THE LIMITED REMEDY OF REPAIR AND REPLACEMENT FAILS OF ITS ESSENTIAL PURPOSE.

Some jurisdictions do not allow the limitation or exclusion of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from one jurisdiction to another.

Who is covered?

This Warranty extends only to the first consumer purchaser and is not transferable.

What will HUBBLE do?

HUBBLE or its authorized distributor at its sole discretion will, at no charge, repair or replace any Products or Accessories that do not conform to this Warranty. In the event that replacement is necessary to remedy a defect in material or workmanship, HUBBLE may use new or remanufactured products, accessories or parts of equal quality to the original Product or Accessory.

How to Obtain Warranty Service or Other Information?

To obtain service or information, please contact us by:

Live Chat: hubbleconnected.com

Email: support@hubbleconnected.com

https://hubbleconnected.com/warranty

https://hubbleconnected.com/apps/product-registration

You will receive instructions on how to ship the Products or Accessories at your expense and risk, to a HUBBLE Authorized Repair Center.

You must include: (a) the Product or Accessory; (b) the original proof of purchase (receipt) which includes the date, place and seller of the Product; (c) if a warranty card was included in your box, a completed warranty card showing the serial number of the Product; (d) a written description of the problem; and, (e) your name, address, email address and telephone number.



These terms and conditions constitute the complete warranty agreement between you and HUBBLE regarding the Products or Accessories purchased by you, and supersede any prior agreement or representations, including representations made in any literature publications or promotional materials issued by HUBBLE or representations made by any agent, employee or staff of HUBBLE, that may have been made in connection with your purchase of any Product and/or Accessory.

FCC and IC regulations (FCC Part 15)

Note: This device complies with Part 15 of the FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux Partie 15 des règlements de la FCC et CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouilla
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélec subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



1) Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

2) Radiation Exposure Statement:

The baby unit complies with FCC/ISED radiation exposure limits set forth for an uncontrolled environment. The baby unit should be installed and operated with minimum distance 20cm between the radiator & your body. The parent unit has been tested and comply with FCC and ISED SAR limits.

Declaration d'exposition aux radiations:

L'unite bebe est conforme aux limites d'exposition aux rayonnements FCC /ISED etablies pour un environnement non controle. L'unite bebe doit etre installee et utilisee avec une distance minimale de 20 cm entre le radiateur et votre corps.

L'unite parent a ete testee et est conforme aux limites SAR FCC et ISED.

9. Technical Specifications

Baby Unit

Frequency	2402 MHz to 2477 MHz
Wi-Fi®	802.11 b/g/n, 2412 MHz to 2462 MHz
Image sensor	color CMOS 1M Pixels
IR LED	8 pcs
Operating Temperature	41°F - 104°F
Power Adapter	Input 100-240V AC, 50/60Hz, 300mA; Output 5.0V DC, 1000mA



Parent Unit

Frequency	2402 MHz to 2477 MHz
Display	5" diagonal LCD
Brightness Control	8 steps
Volume Control	8 steps
Operating Temperature	41°F - 104°F
Power Adapter:	Input 100-240V AC, 50/60Hz, 300mA; Output 5.0V DC, 1000mA WARNING <i>Use only with provided power supply.</i>
Battery (built-in)	TMB i9300 3.8V, 2100mAh Lithium-Ion, re-chargeable battery pack WARNING <i>Do not attempt to replace the battery, but contact customer Service if it needs replacing.</i>

Specifications are subject to change without prior notice.





Manufactured, distributed and sold by Hubble Baby (HK) Limited. Apple logo is trademark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play and Android are trademarks of Google Inc. Wi-Fi is a trademark of the Wi-Fi Alliance. All rights reserved.

US_EN Version 1.0
Printed in China

