CMA Testing and Certification Laboratories
廠商會檢定中心

TEST REPORT

Report No.	:	AV0042090(4)	Date :	12 Jul 2017
Application No.	:	LV023154(4)		
Applicant	:	One World Technologies, Inc. 1428 Pearman Dairy Rd., Anderson, South Carolina, United States, 29625		
Sample Description	:	One(1) item of submitted sample stated to be Remote of DC 18V P3800K RC High Speed Truck of Model No. P3800T Sample registration no. : RV0025912-001 Radio Frequency : 2413MHz – 2473MHz Transceiver Rating : 2 x 1.5V AAA size batteries No. of submitted sample : Two (2) piece (s)		
Date Received	:	10 Jul 2017		
Test Period	:	10 Jul 2017 to 12 Jul 2017		
Test Requested	:	FCC Part 15 Certification (15.249), FCC Part 15 Verification Procedure Industry Canada RSS-210 Issue 9, Class B digital apparatus under ICES-003 Issue 6		
Test Method	:	47 CFR Part 15 (10-1-15 Edition), ANSI C63.4 – 2014, ANSI C63.10 – 2013, Industry Canada RSS-210 Issue 9, Industry Canada RSS-Gen Issue 6		
Test Engineer	:	Mr. LEUNG Shu-kan, Ken		
Test Result	:	See attached sheet(s) from page 2 to 35.		
Conclusion	:	The submitted sample was found to comply with requirement of FCC Subpart B and C, Industry Canada RSS-210 Issue 9, Class B digital apparatus under ICES-003 Issue 6.		

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____

Mr. WONG Lap-pong, Andrew
Manager
Electrical Division

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

Table of Contents

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

1 General Information

1.1 General Description

The equipment under test (EUT) is a controller for cycle. The EUT is power by 2 x 1.5V AAA size batteries. It operates at 2413MHz – 2473MHz. There are joysticks on the EUT. When the joysticks are moved, the EUT will transmit the radio control signal to receiver.

The brief circuit description is listed as follows:

- U1 and its associated circuit act as MCU with RF circuit
- R4, R5, C5 and its associated circuit act as LVD
- VR1, VR2, VR3 and its associated circuit act as control

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

1.2 Location of the test site

FCC Registered Test Site Number: 416666
IC Registered Test Site Number: 4093A

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	15 Nov 2017	1Year
Spectrum Analyzer	R&S	FSV40	100964	08 Feb 2018	1Year
Biconical Antenna	Rohde & Schwarz	HK116	837414/004	17 Aug 2017	1Year
Log Periodic Antenna	Teseq	UPA6109	43666	27 Jul 2017	1Year
Loop Antenna	EMCO	6502	00056620	25 Jan 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	19 Dec 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	21 Dec 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	02 Aug 2017	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	02 Aug 2017	2Years
Horn Antenna	Schwarzbeck	BBHA 9120C	9120C 594	26 Jul 2018	2Years
Pre-amplifier	Schwarzbeck	BBV9718	BBV9718 297	24 Jul 2018	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	20 Dec 2017	1Year

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.83dB
30MHz ~ 200MHz (Vertical)	4.84dB
200MHz ~1000MHz (Horizontal)	4.87dB
200MHz ~1000MHz (Vertical)	5.94dB
1GHz ~6GHz	4.41dB
6GHz ~18GHz	4.64dB

Line-conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz~30MHz	2.64dB

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

2 Description of the emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground for below 1GHz measurement and 1.5m high above the ground for above 1GHz measurement. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	28	° C
Relative humidity:	60	%

Testing frequency range: 9kHz to 26GHz Mode: Transmission
Measurement: Quasi-peak (9kHz – 1GHz), Peak and Average(above 1GHz)
RBW: 9kHz (below 30MHz), 120kHz (30MHz – 1GHz), 1MHz (above 1GHz)
VBW: 30kHz (below 30MHz), 300kHz (30MHz – 1GHz,), 3MHz (above 1GHz, Peak measurement), 10Hz (above 1GHz, Average measurement)

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBµV)	Transducer Factor (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)	Measurement (Peak/ Average)
2412.982	H	90.2	- 4.7	85.5	114.0	- 28.5	Peak
2412.984	V	87.9	- 4.7	83.2	114.0	- 30.8	Peak
2449.980	H	87.0	- 4.7	82.3	114.0	- 31.7	Peak
2449.970	V	82.9	- 4.7	78.2	114.0	- 35.8	Peak
2472.984	H	85.8	- 4.7	81.1	114.0	- 32.9	Peak
2472.827	V	82.6	- 4.7	77.9	114.0	- 36.1	Peak
2394.236	H	67.2	- 6.7	60.5	74.0	- 13.5	Peak
2394.236	H	35.3	- 6.7	28.6	54.0	- 25.4	Average
2394.268	V	65.1	- 6.7	58.4	74.0	- 15.6	Peak
2394.268	V	35.4	- 6.7	28.7	54.0	- 25.3	Average
2496.157	H	68.1	- 4.7	63.4	74.0	- 10.6	Peak
2496.157	H	33.6	- 4.7	28.9	54.0	- 25.1	Average
2496.107	V	62.2	- 4.7	57.5	74.0	- 16.5	Peak
2496.107	V	33.6	- 4.7	28.9	54.0	- 25.1	Average
4825.610	H	56.5	3.0	59.5	74.0	- 14.5	Peak
4825.899	H	28.1	3.0	31.1	54.0	- 22.9	Average
4825.954	V	58.5	3.0	61.5	74.0	- 12.5	Peak
4825.996	V	28.6	3.0	31.6	54.0	- 22.4	Average

Remark: Other emissions more than 20dB below the limit are not reported.
If Peak measurement values are lower than average limit, average measurement is not necessary.

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBµV)	Transducer Factor (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)	Measurement (Peak/ Average)
4899.985	H	59.3	3.0	62.3	74.0	- 11.7	Peak
4899.840	H	28.2	3.0	31.2	54.0	- 22.8	Average
4899.966	V	57.8	3.0	60.8	74.0	- 13.2	Peak
4899.876	V	28.1	3.0	31.1	54.0	- 22.9	Average
4946.004	H	55.7	3.6	59.3	74.0	- 14.7	Peak
4945.958	H	27.1	3.6	30.7	54.0	- 23.3	Average
4945.804	V	58.0	3.6	61.6	74.0	- 12.4	Peak
4945.890	V	27.9	3.6	31.5	54.0	- 22.5	Average

Remark: Other emissions more than 20dB below the limit are not reported.
If Peak measurement values are lower than average limit, average measurement is not necessary.

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

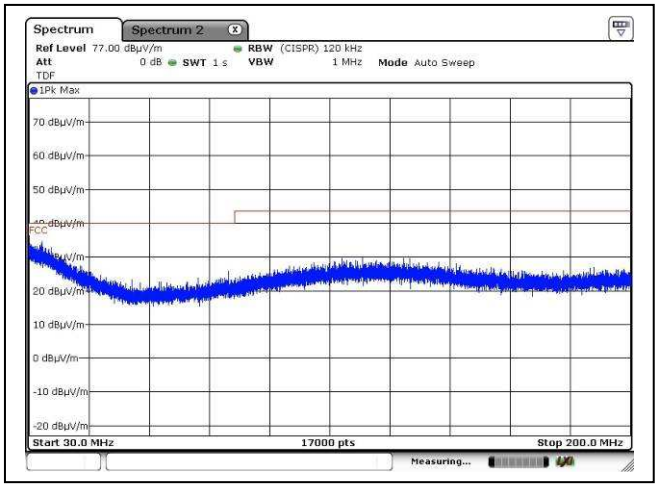

Lower channel, 30MHz – 200MHz, Horizontal

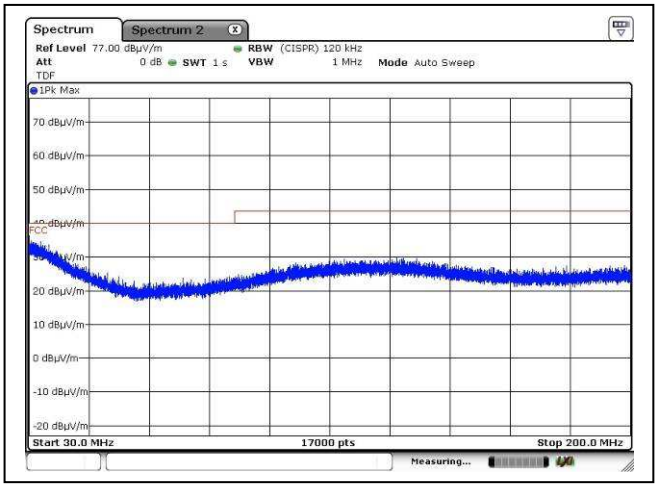

Lower channel, 30MHz – 200MHz, Vertical

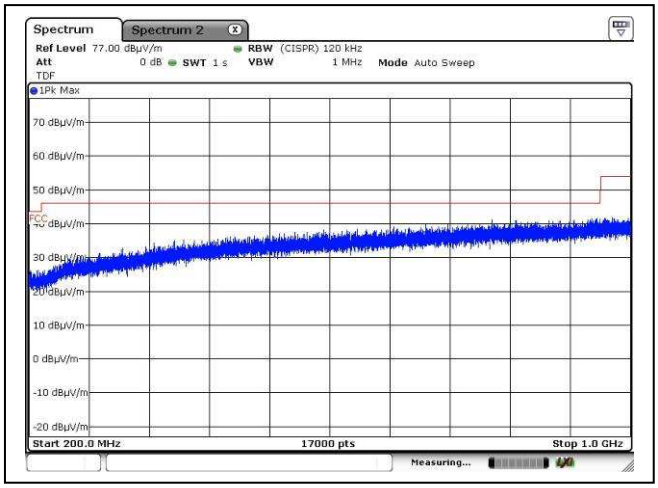

Lower channel, 200MHz – 1GHz, Horizontal

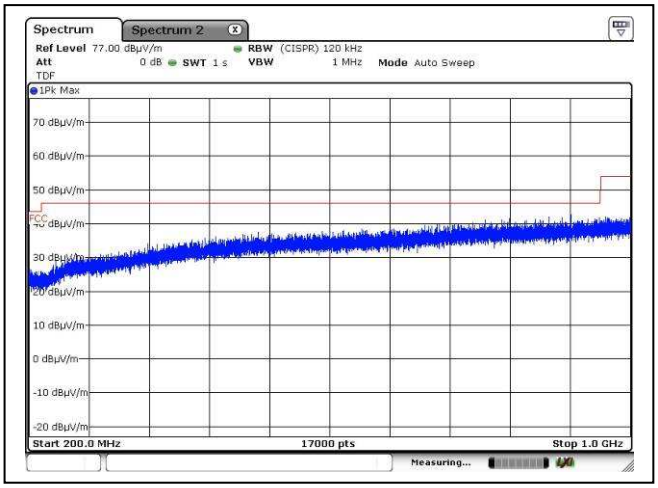

Lower channel, 200MHz – 1GHz, Vertical

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

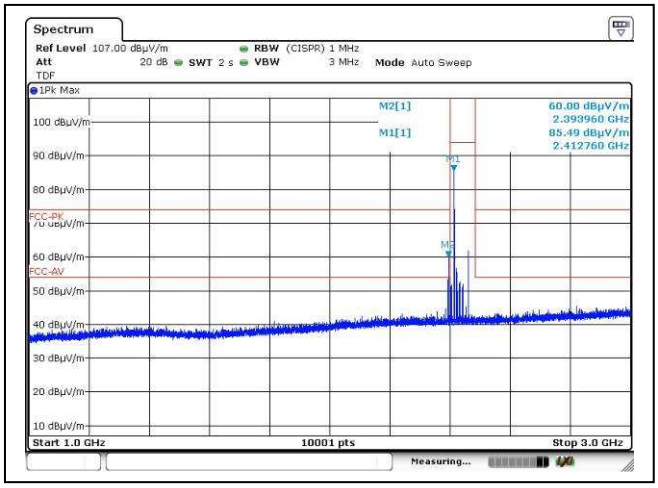

Lower channel, 1GHz – 3GHz, Horizontal

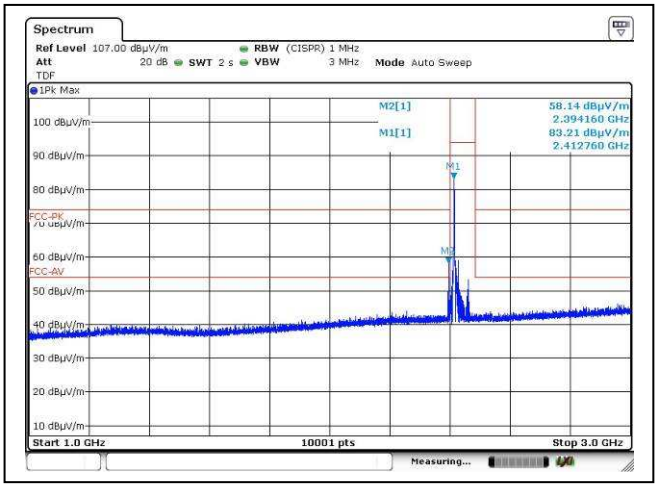

Lower channel, 1GHz – 3GHz, Vertical

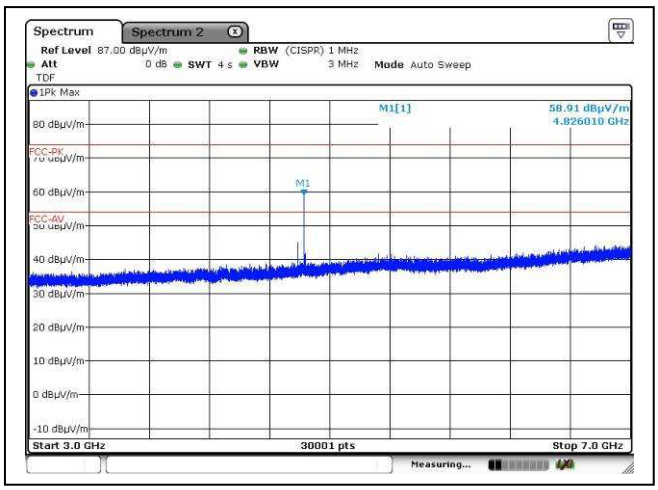

Lower channel, 3GHz – 7GHz, Horizontal

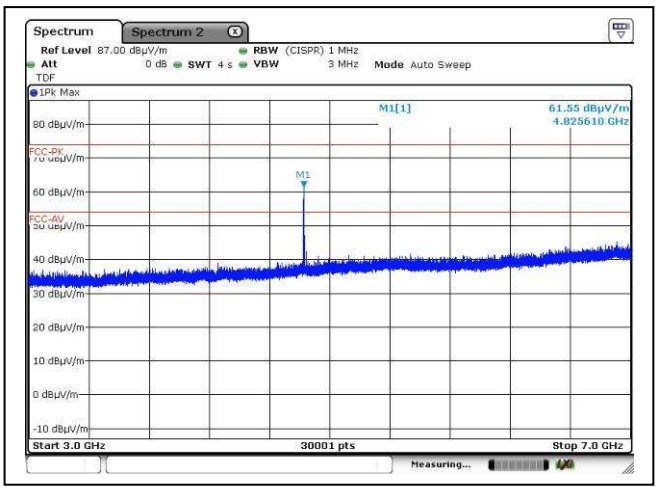

Lower channel, 3GHz – 7GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

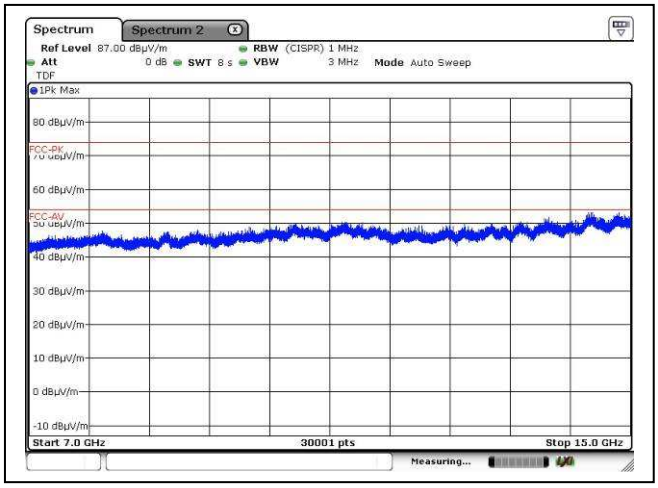

Lower channel, 7GHz – 15GHz, Horizontal

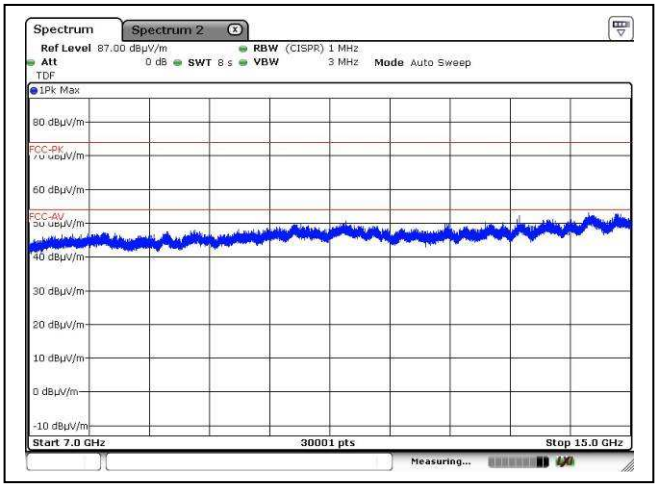

Lower channel, 7GHz – 15GHz, Vertical

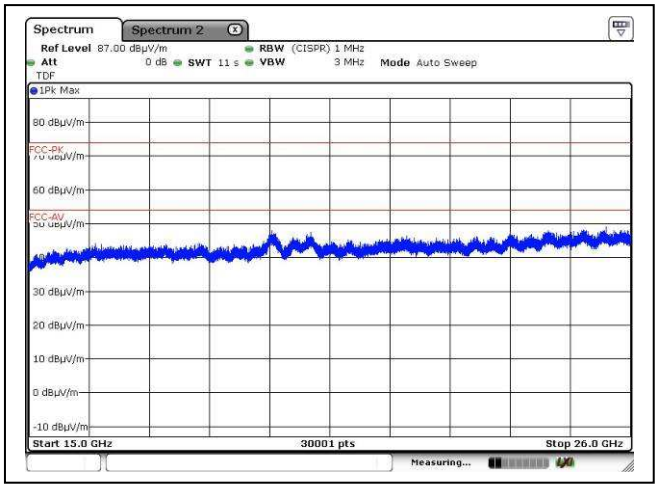

Lower channel, above 15GHz, Horizontal

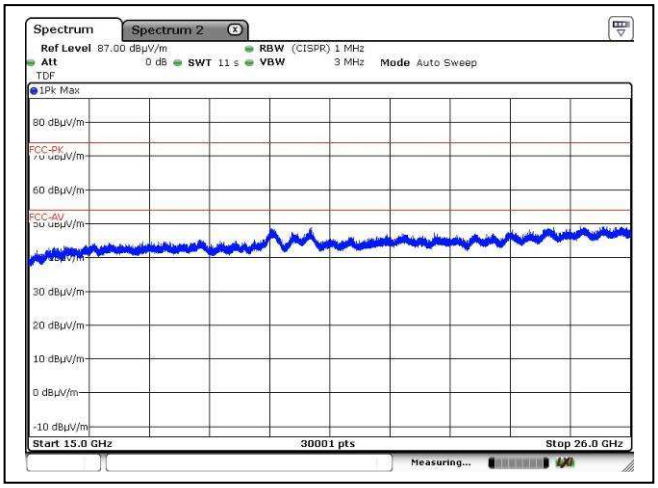

Lower channel, above 15GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

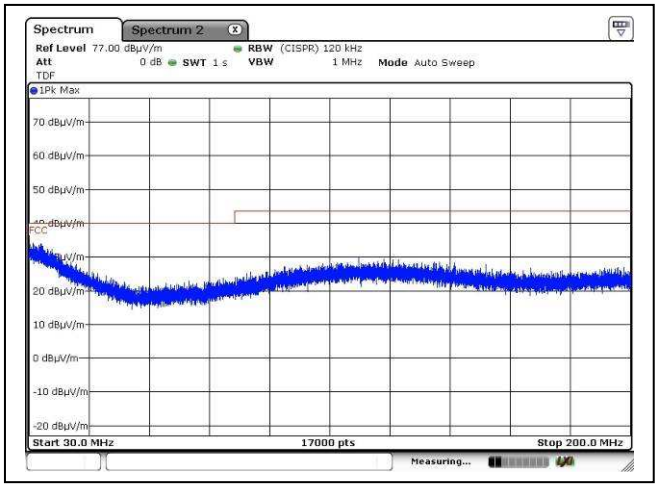

Middle channel, 30MHz – 200MHz, Horizontal

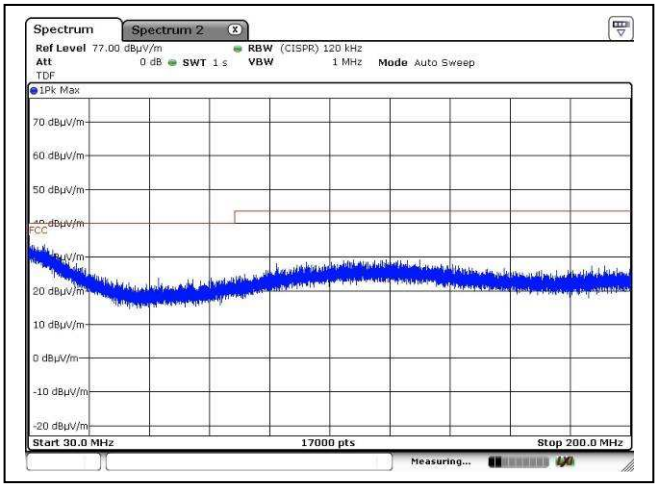

Middle channel, 30MHz – 200MHz, Vertical

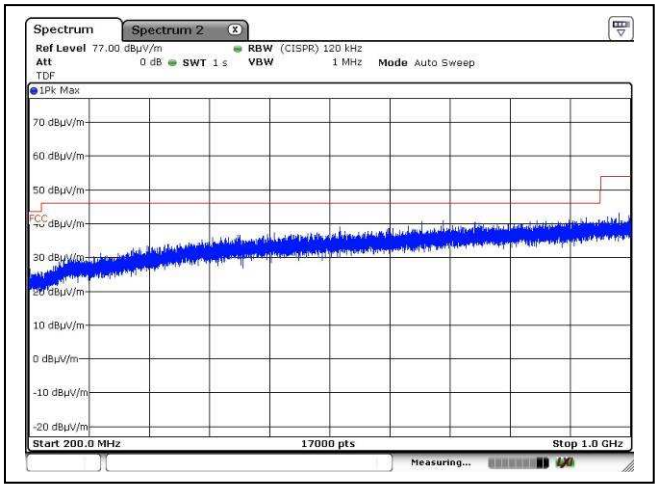

Middle channel, 200MHz – 1GHz, Horizontal

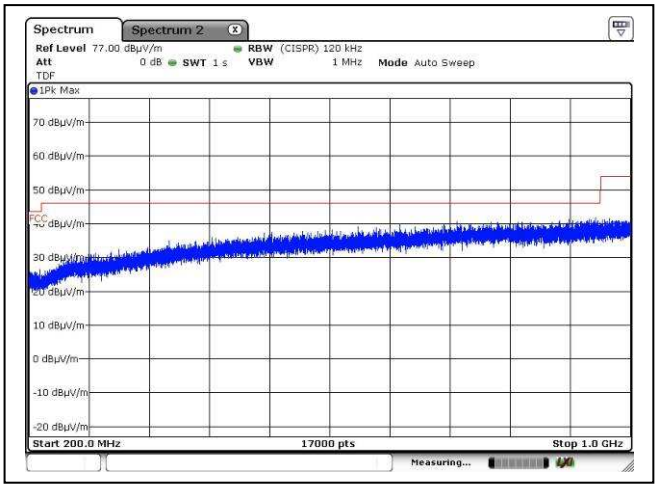

Middle channel, 200MHz – 1GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

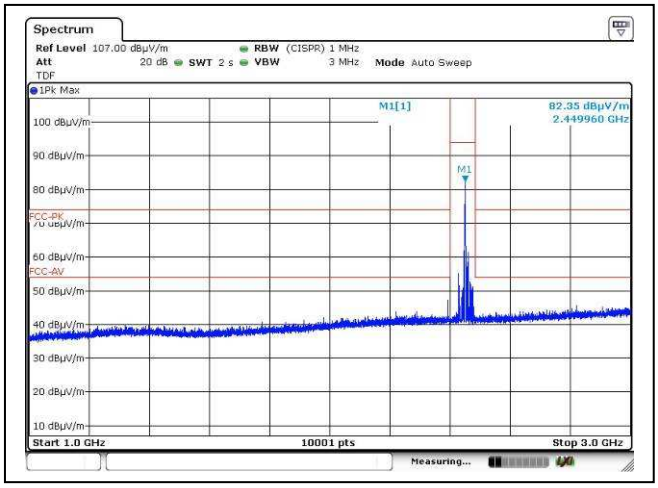

Middle channel, 1GHz – 3GHz, Horizontal

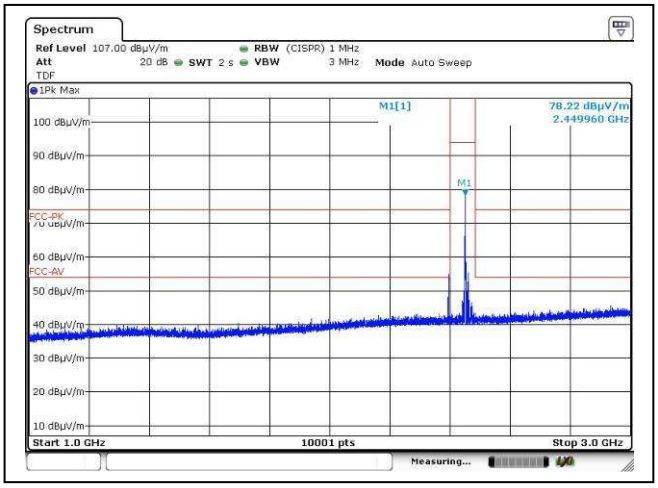

Middle channel, 1GHz – 3GHz, Vertical

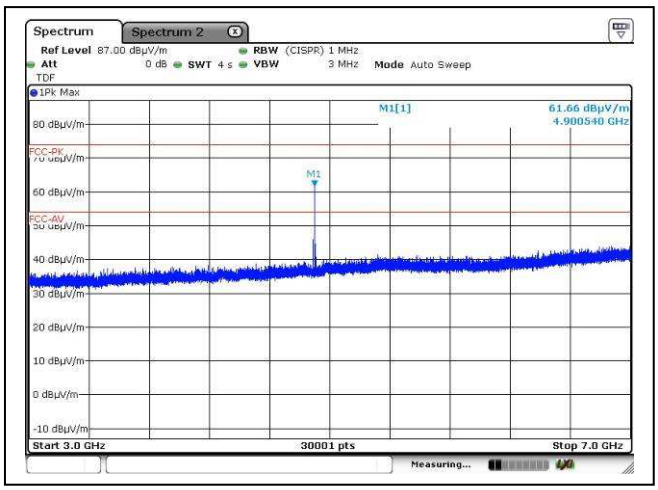

Middle channel, 3GHz – 7GHz, Horizontal

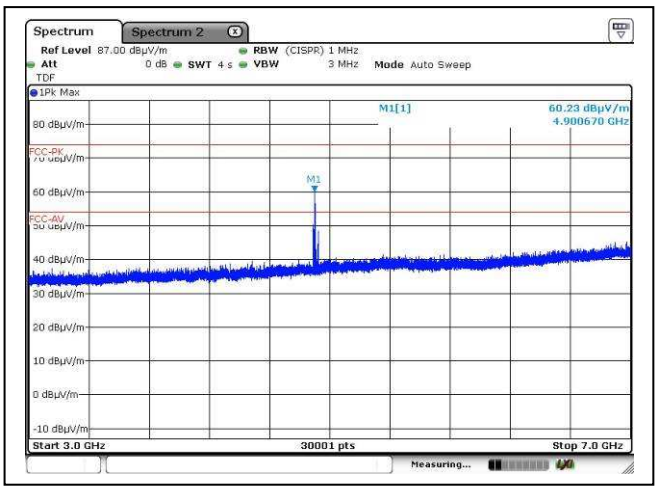

Middle channel, 3GHz – 7GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

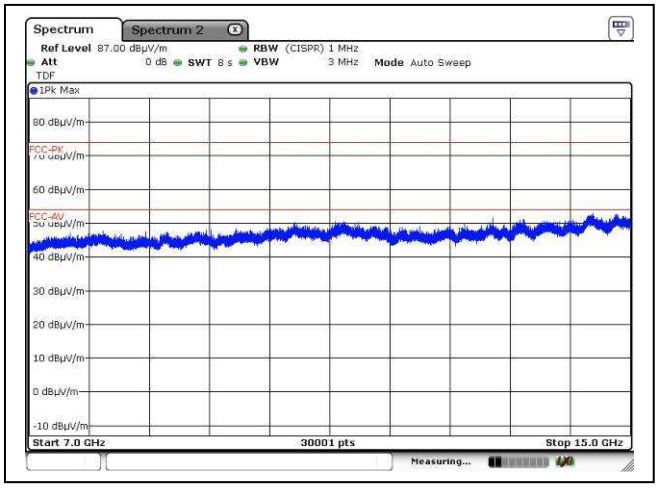

Middle channel, 7GHz – 15GHz, Horizontal

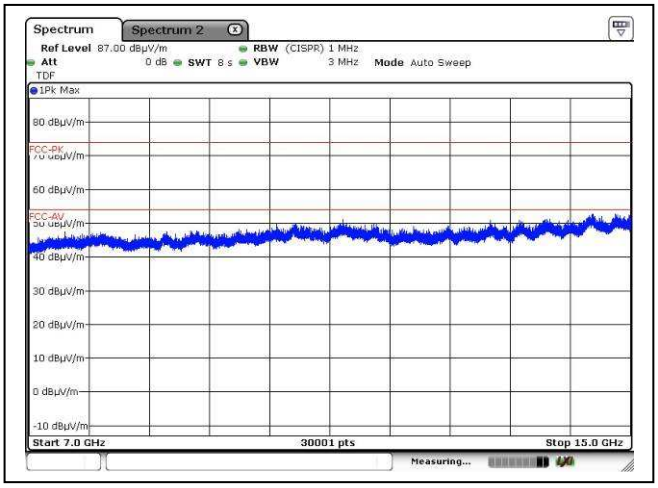

Middle channel, 7GHz – 15GHz, Vertical

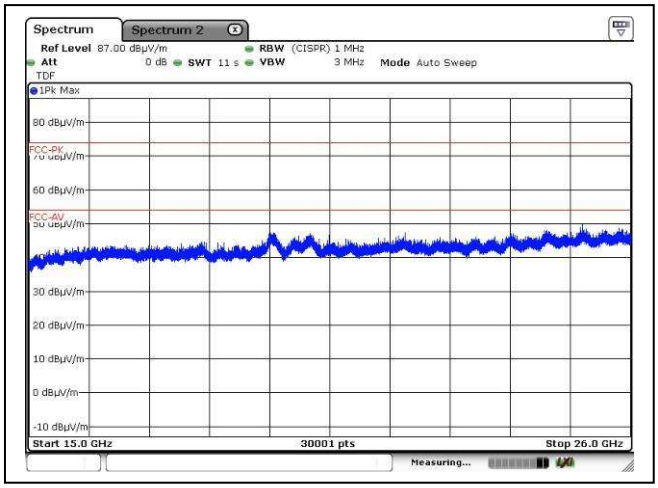

Middle channel, above 15GHz, Horizontal

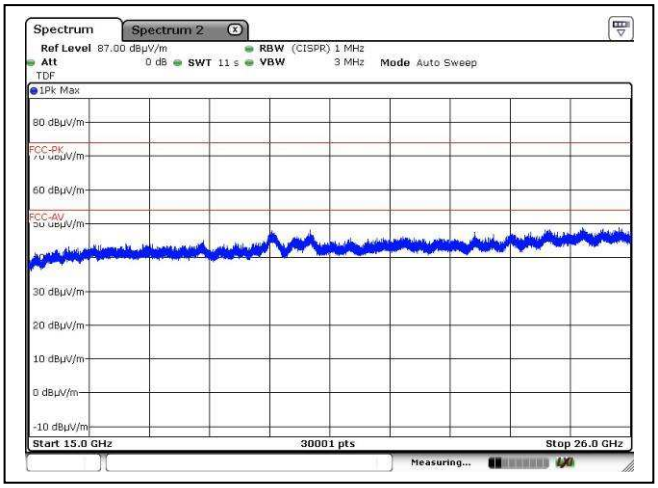

Middle channel, above 15GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

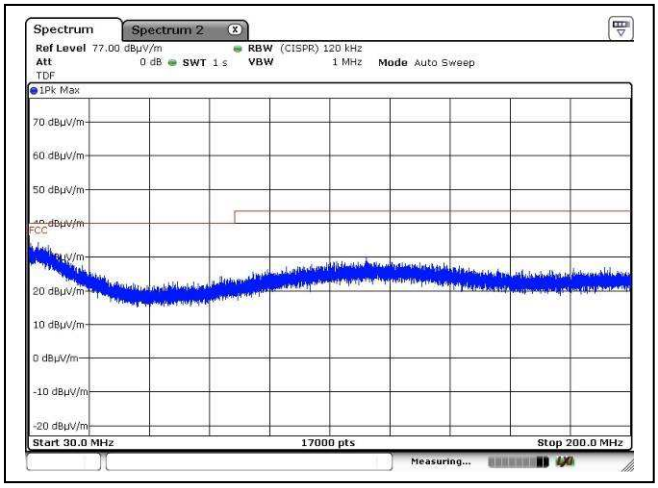

Higher channel, 30MHz – 200MHz, Horizontal

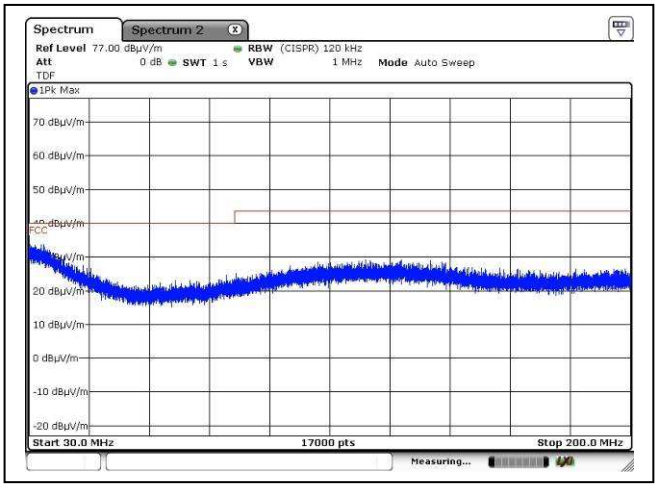

Higher channel, 30MHz – 200MHz, Vertical

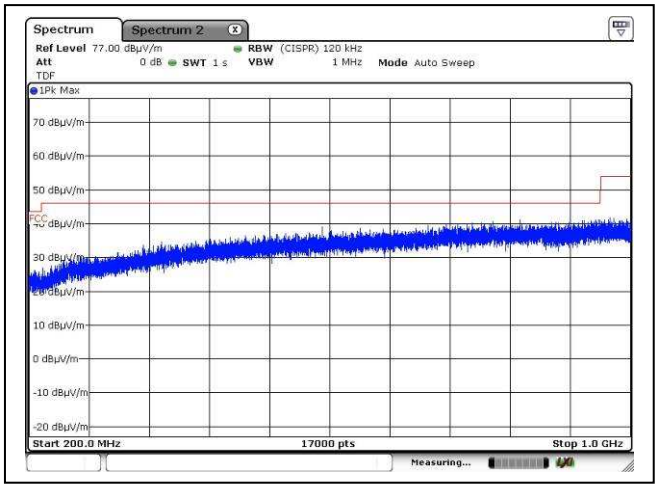

Higher channel, 200MHz – 1GHz, Horizontal

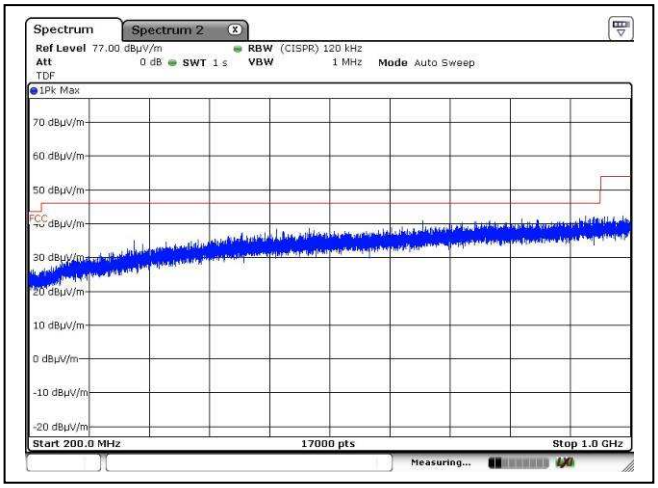

Higher channel, 200MHz – 1GHz, Vertical

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

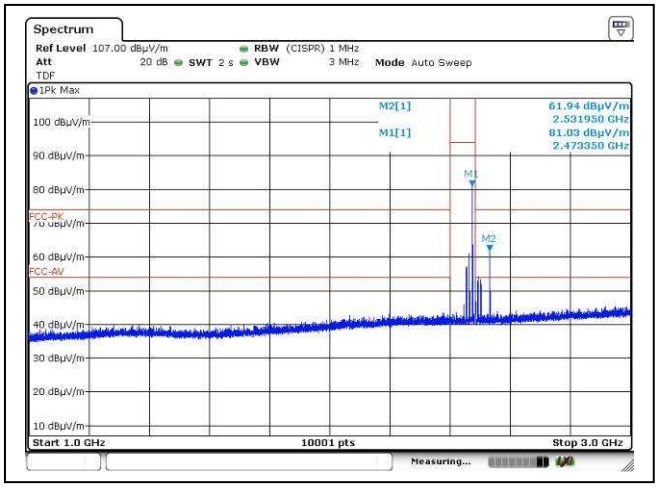

Higher channel, 1GHz – 3GHz, Horizontal

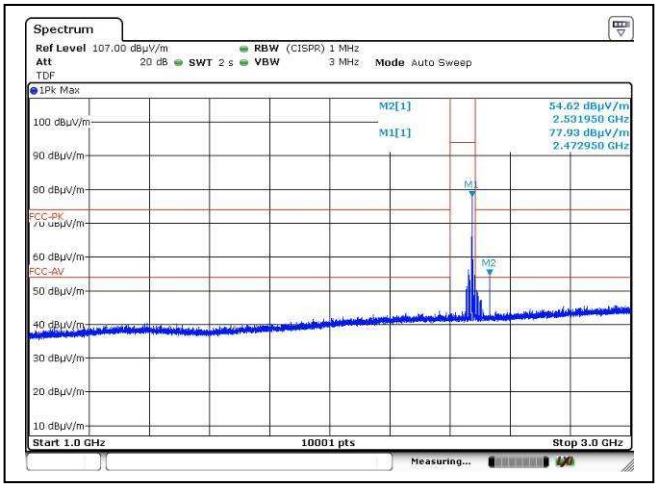

Higher channel, 1GHz – 3GHz, Vertical

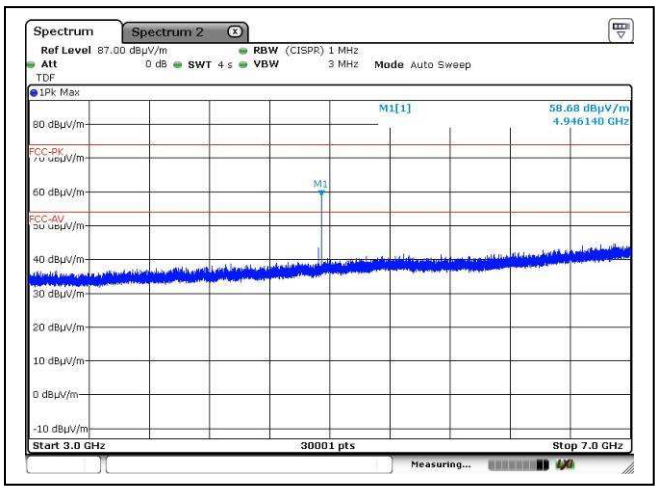

Higher channel, 3GHz – 7GHz, Horizontal

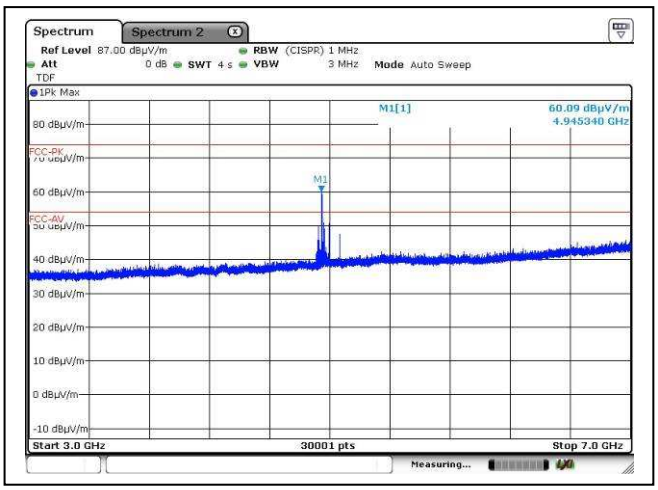

Higher channel, 3GHz – 7GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

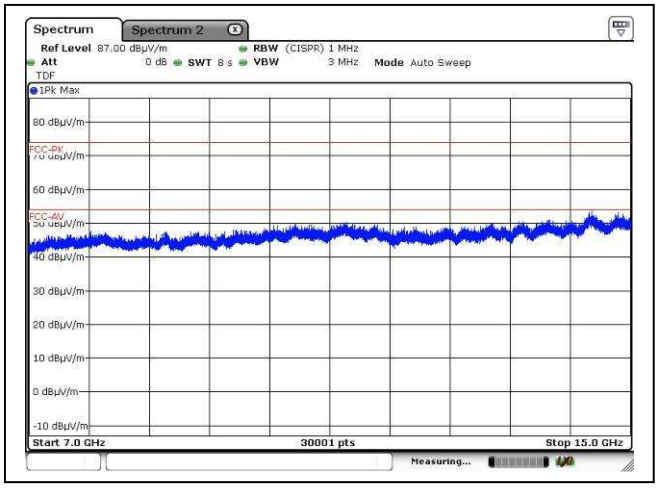

Higher channel, 7GHz – 15GHz, Horizontal

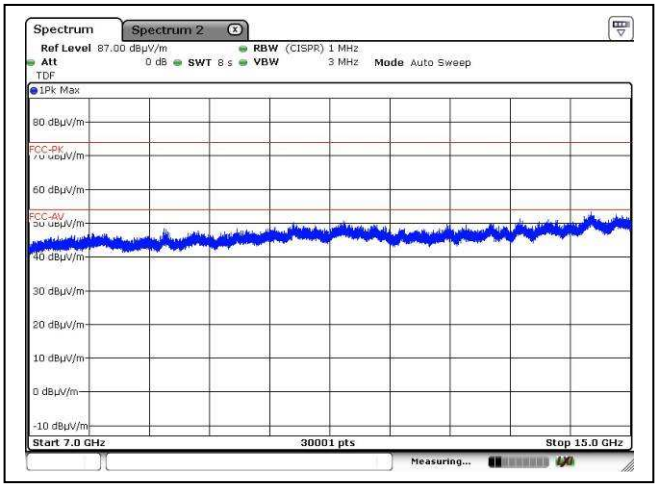

Higher channel, 7GHz – 15GHz, Vertical

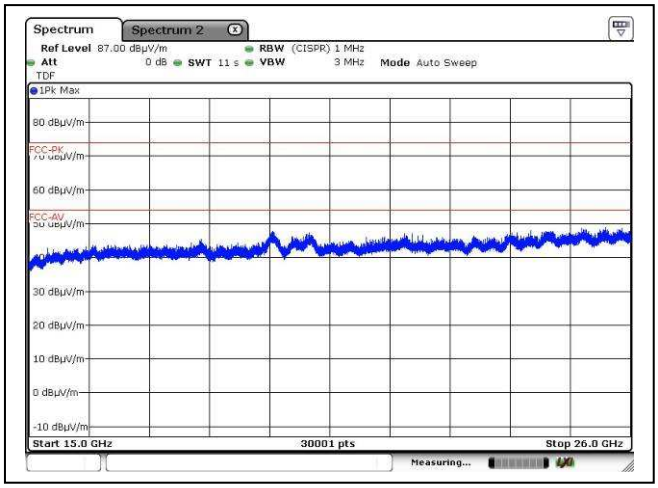

Higher channel, above 15GHz, Horizontal

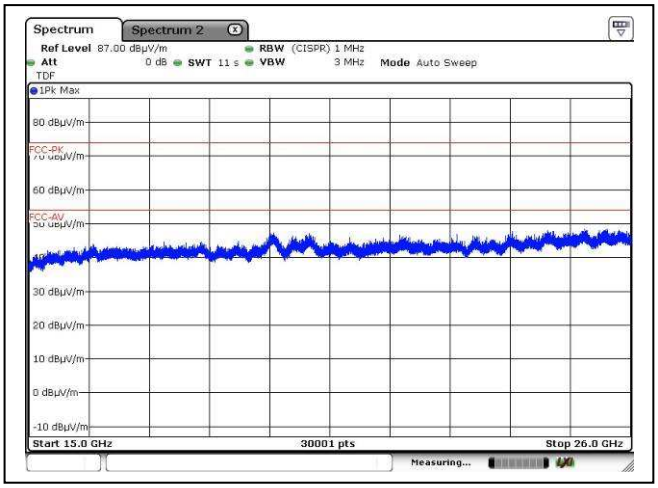

Higher channel, above 15GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	28	° C
Relative humidity:	60	%

Testing frequency range: 9kHz to 26GHz Mode: Receiving
Measurement: Quasi-peak (9kHz – 1GHz), Peak (above 1GHz)
RBW: 9kHz (below 30MHz), 120KHz (30MHz – 1GHz), 1MHz (above 1GHz)
VBW: 30kHz (below 30MHz), 300kHz (30MHz – 1GHz), 3MHz (above 1GHz)

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)

Remark: No specified emission found

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

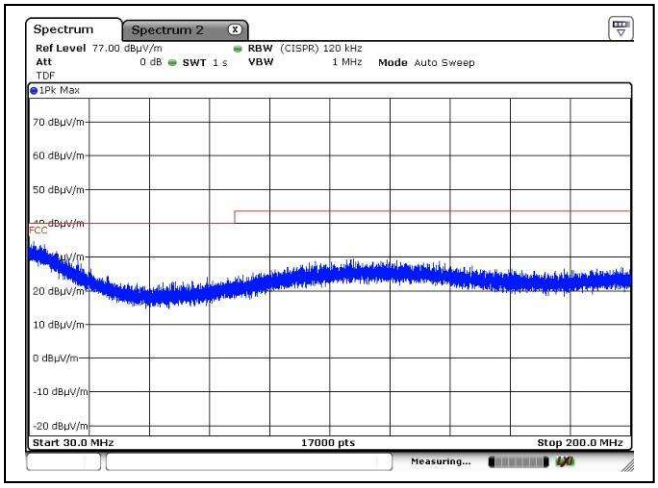

Receiving mode, 30MHz – 200MHz, Horizontal

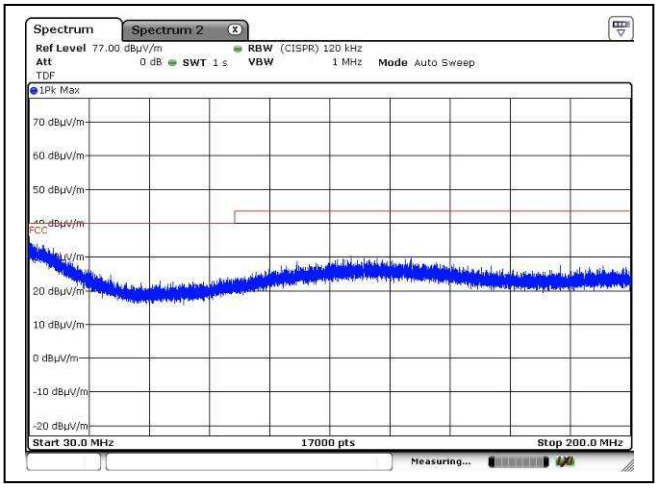

Receiving mode, 30MHz – 200MHz, Vertical

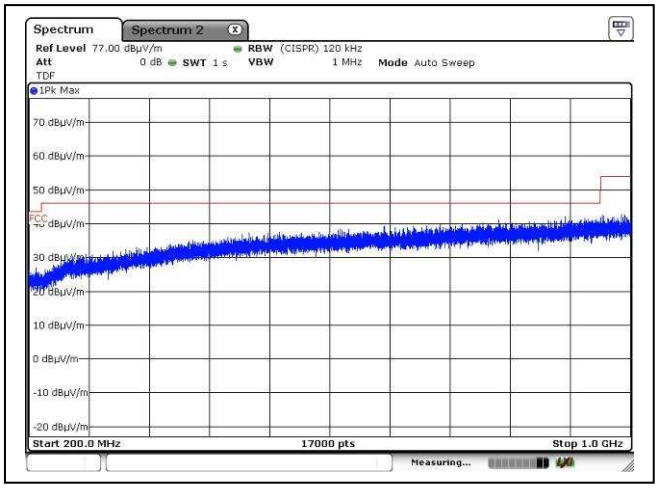

Receiving mode, 200MHz – 1GHz, Horizontal

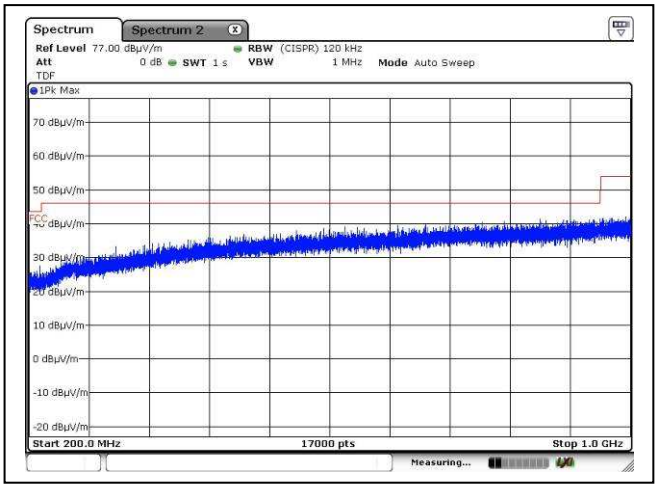

Receiving mode, 200MHz – 1GHz, Vertical

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

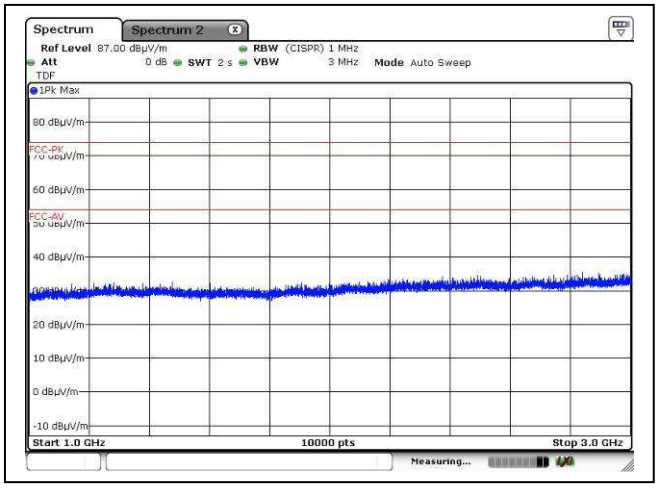

Receiving mode, 1GHz – 3GHz, Horizontal

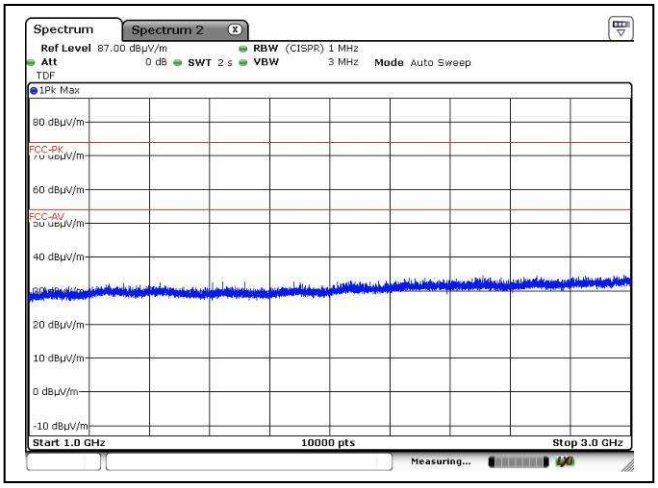

Receiving mode, 1GHz – 3GHz, Vertical

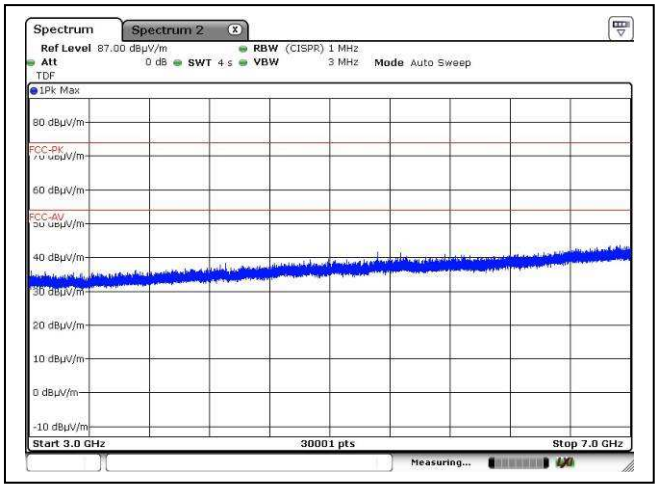

Receiving mode, 3GHz – 7GHz, Horizontal

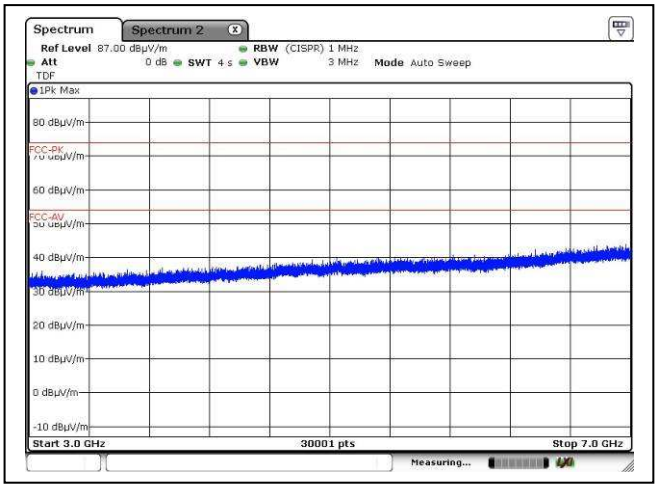

Receiving mode, 3GHz – 7GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.2 Radiated Emission Measurement Data (Con't)

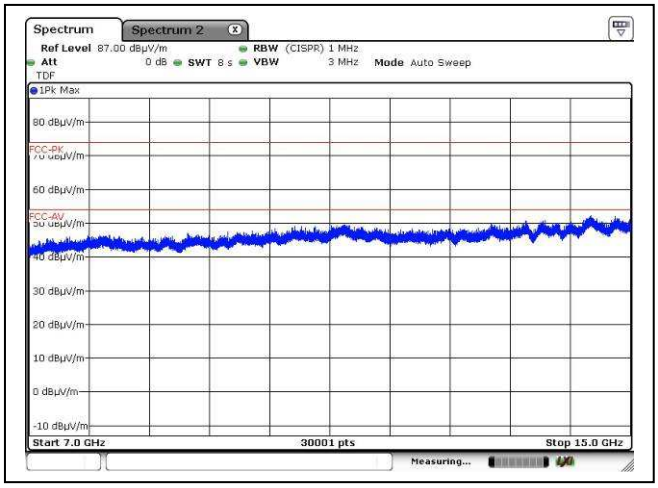

Receiving mode, 7GHz – 15GHz, Horizontal

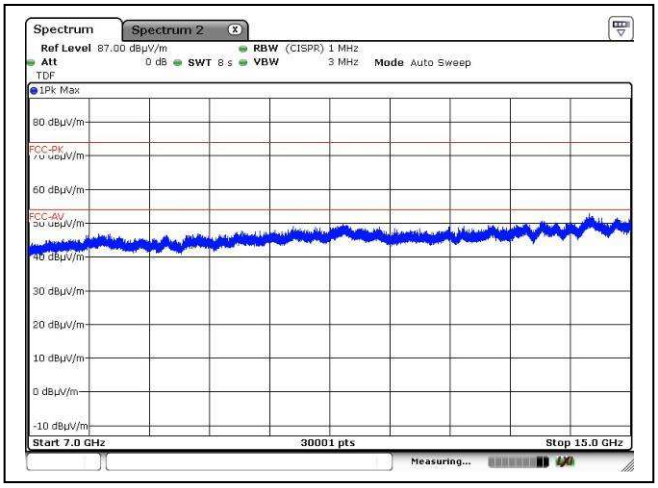

Receiving mode, 7GHz – 15GHz, Vertical

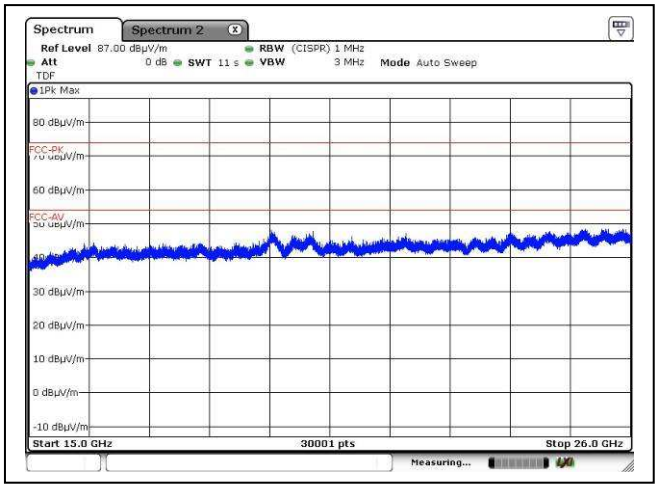

Receiving mode, above 15GHz, Horizontal

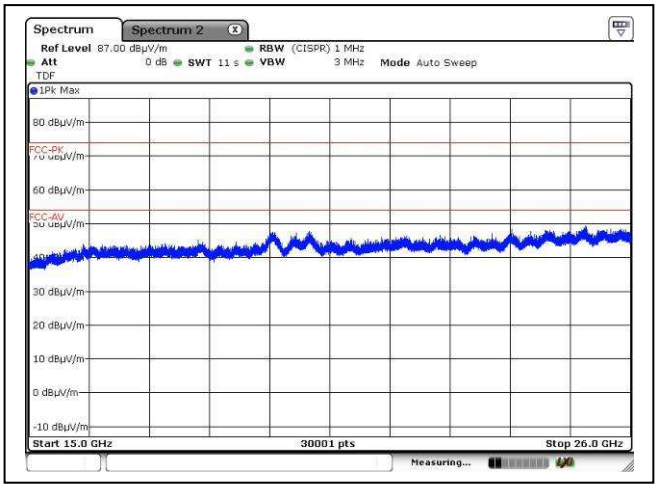

Receiving mode, above 15GHz, Vertical

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.3 20dB bandwidth

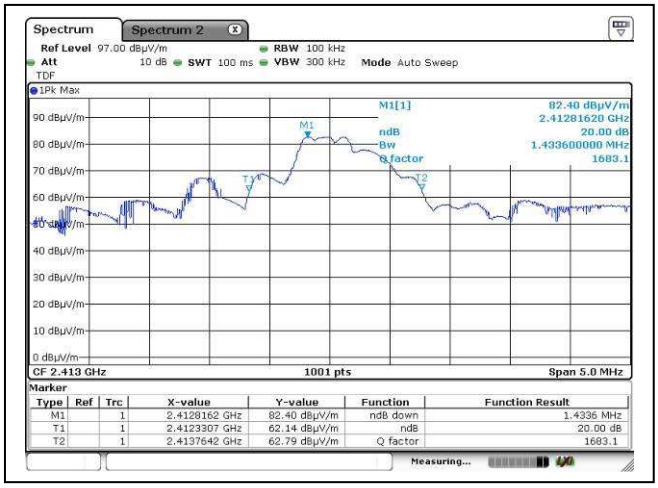

Lower channel

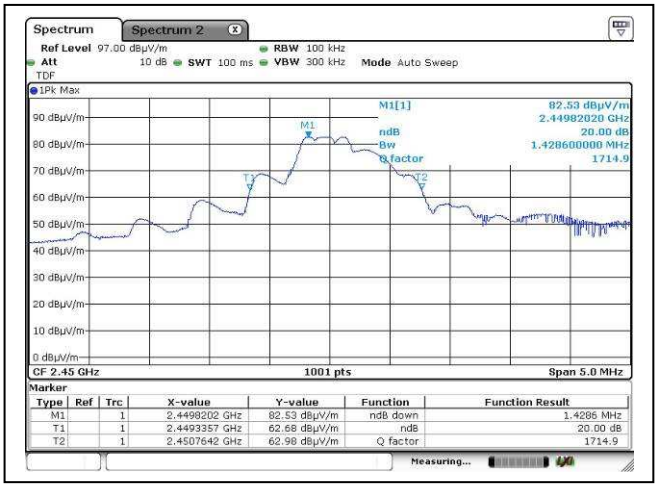

Middle channel

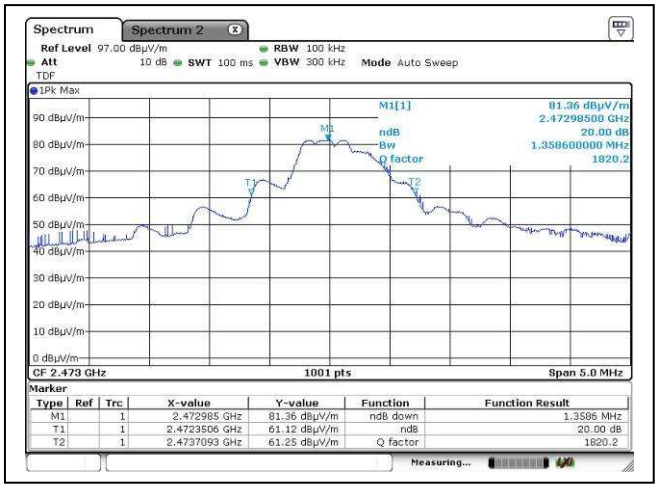

Higher channel

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

2.4 99% bandwidth

Lower channel

Middle channel

Higher channel

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename VMZ-P3800T TSup.pdf.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename VMZ-P3800T ExPho.pdf and VMZ-P3800T InPho.pdf.

4.3 Antenna requirement

Appendices A3 shows the antenna is permanently attached and cannot be changed. Therefore it fulfils the section 15.203 requirement

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

5 Appendices

A1	Photos of the set-up of Radiated Emissions	2	pages
A2	Photos of External Configurations	2	pages
A3	Photos of Internal Configurations	2	pages
A4	ID Label/Location	2	pages

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A1. Photos of the set-up of Radiated Emissions

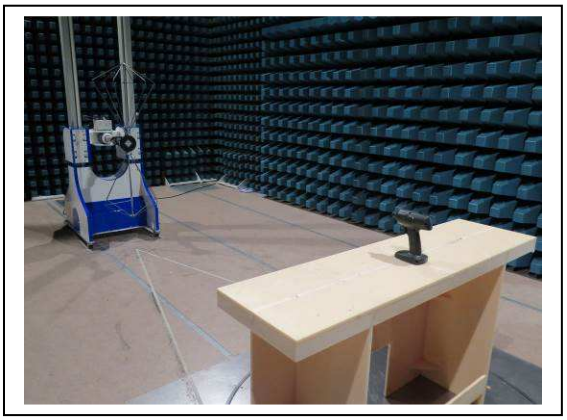

30MHz – 200MHz

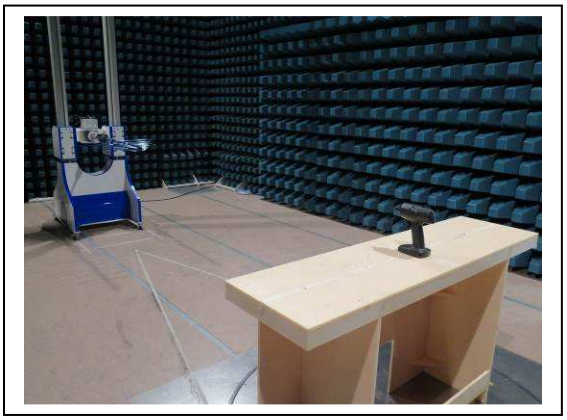

200MHz – 1GHz

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A1. Photos of the set-up of Radiated Emissions

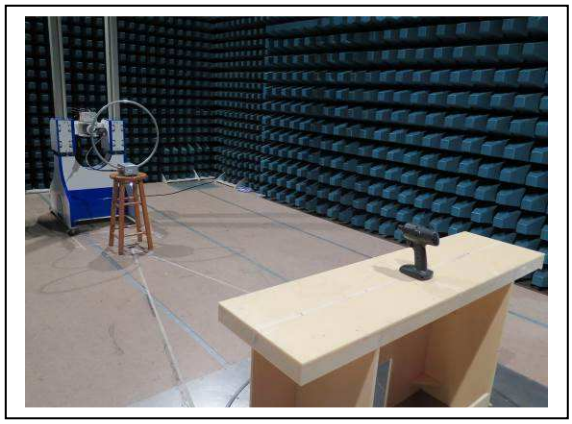

9kHz – 30MHz

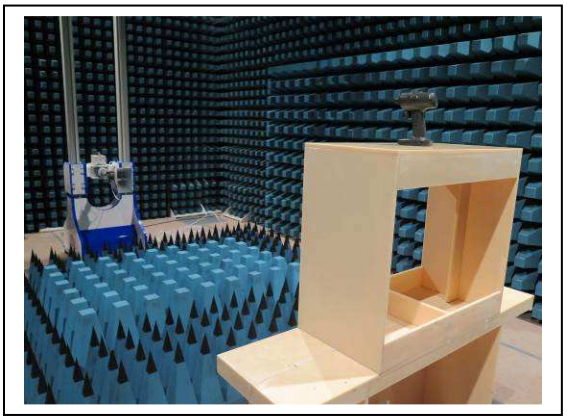

Above 1GHz

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A2 Photos of External Configurations

External Configuration 1

External Configuration 2

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A2 Photos of External Configurations

External Configuration 3

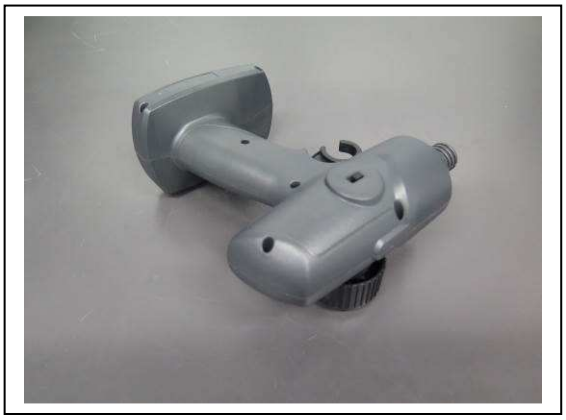

External Configuration 4

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A3 Photos of Internal Configurations

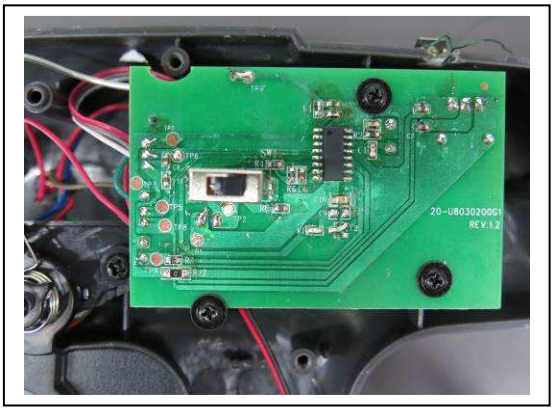

Internal Configuration 1

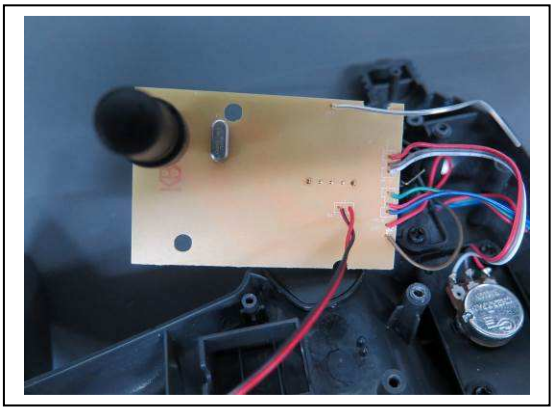

Internal Configuration 2

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A3 Photos of Internal Configurations

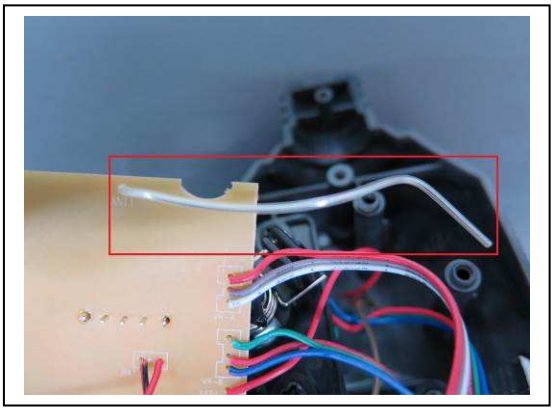

EUT antenna

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A4 ID Label / Location

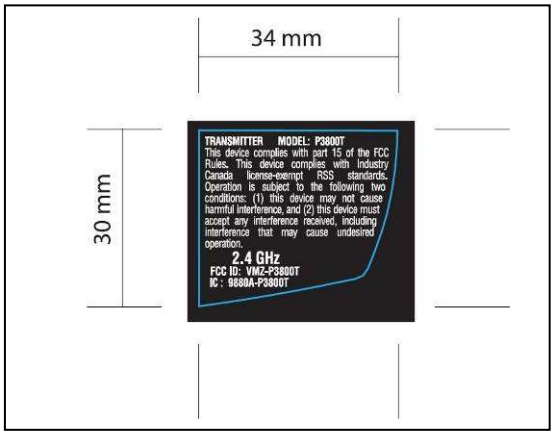

ID Label 1

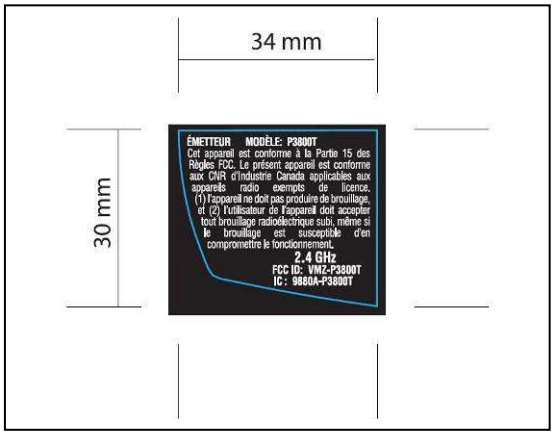

ID Label 2

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com

TEST REPORT

Report No. : AV0042090(4) Date : 12 Jul 2017

A4 ID Label / Location

ID Label 3 (Label position)

***** End of Report *****

Tested by: Mr. LEUNG Shu-kan, Ken

Reviewed by: Mr. WONG Lap-pong, Andrew

FCC ID: VMZ-P3800T
IC: 9880A-P3800T

CMA Industrial Development Foundation Limited
Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.
Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: http://www.cmatcl.com