
Bluetooth headset (BTE001)

Instruction manual V2.0

Contents

■ Brief introduction.....	2
1、 Bluetooth wireless communication technology	2
2、 Bluetooth wireless headset.....	2
■ Before using the headset.....	3
1、 Overview of the headset.....	3
2、 Charging the headset.....	3
■ Basic operation	4
1、 Switching on/off the headset.....	4
2、 The LED indicator of the headset	4
3、 Pairing the headset with Bluetooth mobile phone.....	4
4、 Wearing the headset	5
5、 Telephoning with the headset.....	5
■ Care and maintenance	7
■ Specification	7

Welcome to use this Bluetooth headset, BTE001. Before using it, please read this instruction carefully.

■ Brief instruction

1、Bluetooth wireless communication technology

Bluetooth is a standard of close range radio-communication technology which was drawn up by Ericsson, IBM, Intel, Nokia, Tohiba. Through Bluetooth technology, the purpose is to achieve the highest transmission rate among mobile phone, computer, printer, PDA and other devices. The transmission range is 10 meters, even more, the max. radio-communication range can reach up to 100 meters.

2、Bluetooth wireless headset

By using BTE001, you can enjoy the happiness that is brought by Bluetooth wireless technology. It has the following functions:

- Handsfree receiver/end a call/reject coming call
- Dial last call with headset
- Voice dial (It needs your mobile phone to support)
- Adjust volume
- Switch freely the conversation between mobile phone and headset
- Mute operation during the conversation to keep the conversation secret with the third party.

■ Before using the headset

1、 Overview of the headset

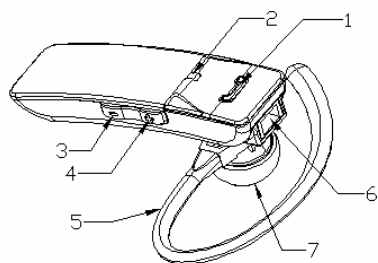


Chart 1

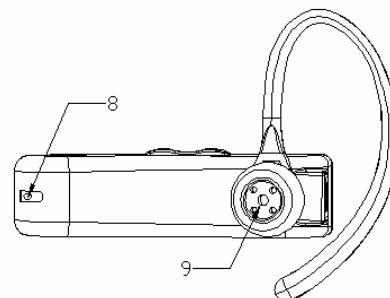


Chart 2

- 1)、 Multifunction button: on/off/Pair/receive coming call/reject coming call/dial last call
- 2)、 The LED indicator of the headset
- 3)、 Volume down/microphone mute
- 4)、 Volume up/conversation switch/microphone mute
- 5)、 Ear hook
- 6)、 Mini USB port for charging
- 7)、 Ear cap
- 8)、 Microphone
- 9)、 Speaker

2、 Charging the headset

The headset should be used built-in rechargeable battery. You must charge the headset fully when you use it for the first time. During using it, if you see the red light to flash and hear the indicator sound (the headset sound 3 tones of “DU” every 20 seconds and a tone of “DU” every 5 seconds), it means the headset is low power, at this time, you have to recharge the headset.

- 1) Plug charger into standard AC power socket
- 2) Connect the end of charger with USB charging port of headset
 - When the red light is always bright, it is charging
 - When the red light is off, it is charging fully
- 3) It will take about 1.5 hours to charge the headset full.

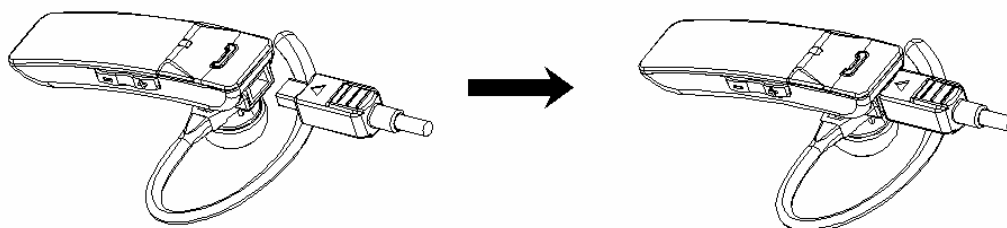


Chart 3

■ Basic operation

1、Switching on/off the headset

Function	Operation	LED indicator	Indication sound
Switch on headset	Press the multifunction button for 3-5 seconds, and release the button until you see the blue LED is bright	Blue LED is on	A tone of “DI” and “DU”
Switch off headset	Press the multifunction button for 2-3 seconds, and release the button until you see the blue LED is long bright	Blue LED is bright and then is off	A tone of “DI”

Remark : After switching on for 10 minutes, the headset cannot still connect with any devices, the headset will switch off automatically, in order to save power.

2、The LED indicator of the headset

1) Plug charging device, the headset will enter into charging status

LED indicator	Status of headset
Red LED is on	It is charging
Red LED is off	Charging finished

2) Pair with Bluetooth device (mobile phone)

LED indicator	Status of headset
Red LED flashes every second	Standby mode (disconnect with Bluetooth device)
Blue LED flashes 2 times every 4 seconds	Standby mode (already connected with Bluetooth device)
Blue LED flashes continuously and quickly	Conversation mode
Red and blue LEDs flash alternately	Pairing mode
Red LED flashes	Low power

3、Pair headset with Bluetooth mobile phone

When you use BTE001 for the first time, please pair headset with your mobile phone, and make sure your mobile phone has Bluetooth function which can be used. The steps are as follows:

- 1) Keep headset and your mobile phone within 1 meter.
- 2) Please make sure your headset is off (All lights is off)
- 3) Press multifunction button for 7-8 seconds and release the button after you hear the third indicated tone (the first one is a tone of “DI”, the second one is “DU”, and the third one is “DONG, DONG”) or see the red LED and blue LED flash alternately, the headset enters

pairing mode.


- 4) Turn on the Bluetooth function of mobile phone, search Bluetooth device, after searching is finished, please select "BTE001" on the device list.
- 5) According to indication, enter password or PIN No: "1234", and press "Yes" or "Confirm" to confirm.
- 6) It mobile phone reminds you to connect device, select "Yes" or "confirm" to confirm (It depends on mobile phone). After successful connecting, the blue LED of headset will flash 2 times every 4 seconds.

Remark:

- Pairing mode will last for 2 seconds, If it can not pair with any devices after exceeding 2 minutes, the headset will switch to standby mode automatically. If need to pair continuously, please switch off headset firstly, and then refer to 1-6 steps to pair again.
- After successful pairing, Bluetooth headset and mobile phone will remember each other. Unless pairing information is deleted owing to new pairing, no need to pair next time.
- In the status of standby and disconnect with any devices, press multifunction of headset, after hearing a tone of "DU", headset will connect with last pairing device.
- The headset will connect with last pairing device after switching on each time. If you need it to pair with other devices, please switch off Bluetooth function of device that currently paired with headset. and then refer to 1-6 steps to pair with new device.

4、Wearing headset

This headset is suitable for both ears. The ear hook can turn freely, please adjust according to the following charts. After wearing the headset well, please turn the microphone of headset towards the mouth of user, then you can enjoy the best comfort and conversation.

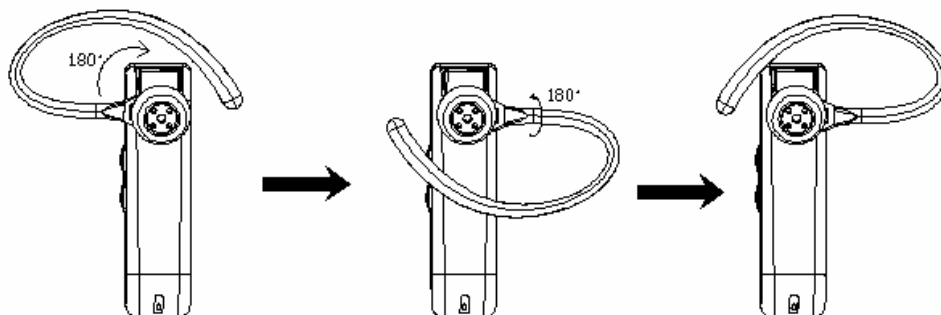

suitable for right ear

suitable for left ear

Telephoning with headset

Function	Status of device	Steps of Operation
----------	------------------	--------------------

	Mobile phone	headset	Operation of headset
Voice dial	Standby mode	switch on	Press volume down for 2 seconds, and release the key after you hear the indication tone
Dial last call	Standby mode	switch on	Press multifunction key quickly for 2 times
Adjust volume	Conversation mode	Conversation mode	Press volume up/down to adjust volume
End a call	Conversation mode	Conversation mode	Short press multifunction key for 1 times
Receive coming call	ringing	switch on	Short press multifunction key for 1 times
Reject coming call	ringing	switch on	Press multifunction key for 2 seconds, and release the key after you hear the indication tone
Conversation switch	Conversation mode	switch on	Press volume up for 2 seconds, and release the key after you hear a tone of "DU", the conversation will be transferred to mobile phone from headset. Do same operation, the conversation will be transferred to headset
Microphone mute	Conversation mode	Conversation mode	Press simultaneously volume up and down for 2 seconds, and release the key after you hear a tone of "DU", the microphone of headset will be mute. When it is in mute mode, the headset will sound a tone of "DI" every 5 seconds
Cancellation mute	Conversation mode	Conversation mode (mute)	Press simultaneously volume up and down for 2 seconds, and release the key after you hear a tone of "DU"

Remark :

- Some mobile phones don't support parts of function of list. Please refer to your instruction manual of mobile phone
- When volume of headset is adjusted to Max. or Min. You will hear a tone of "DING DONG" .
- For parts of mobile phone, when you press the receiving key to receive a call, the conversation will be transferred to mobile phone firstly. At this time, you can use the function of conversation switch or operate on mobile phone to switch the conversation to headset. Please refer to your instruction of mobile phone for further information.

■ Care and maintenance

Before using the Bluetooth adaptor, please read the following recommendations ,It will help you to enjoy the product for many year.

- Keep dry and don't put it in the wet place, in case of effecting the interior circuit of product.
- Don't put the product under the sunlight or place in hot areas. High temperature will shorten the life of electronic device and deform certain plastic.
- Don't expose the adaptor to extreme temperatures, which may damage the internal circuit board.
- Don't try to take apart the product. It may damage the product if you are not professional
- Don't fall off on the floor, or knock the hard substance, it may damage interior circuit.
- Don't use intensify chemical or detergent to clean the product
- Don't scrap the surface with sharp things
- If the product can't work normally, please send it to the regularly asserted store, the staff will help you to solve problem warmly.

■ Specification

Bluetooth version	Compatibility Bluetooth V2.0+EDR;
Bluetooth profiles	Headset, Hands free
Effective range	10m;
Working time of headset	5-6 hrs;
Standby time of headset	120hrs;
Charging input voltage	DC: +5.0±0.25VA
Charging time of headset	About 1.5rs;
Dimension	55*15*8.5mm
Weight	9.5g (include ear hook) 8.5g (not include ear hook)

FCC Warning:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance will void the user's authority to operate the equipment. Any change to the equipment will avoid FCC grant.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The equipment complies with FCC radiation exposure limits set forth for uncontrolled Environment.

Manufacturer may avoid users authority to operate this device.