


封面



LEVN
Bluetooth Headset

C7001
User Manual

If there is any issue with your order, please contact below email to ask for warranty.
Email: levn001@outlook.com

Congratulations

Thank you for purchasing our new C7001 Bluetooth Headset.

This user manual will provide you with all of the information you need to start using your headset.

If you have any problem setting up or using your Bluetooth Headset, please contact us by email: levn001@outlook.com


Please read this manual carefully before using the product and keep it properly.

Alternatively, solutions to common problems can be found in the FAQ section at the end of this manual.

Package Contents

- 1. Headset
- 1. USB Dongle
- 1. User Manual

Product Overview

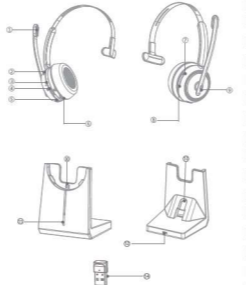

Product Specification


- Bluetooth Version: V2.2
- Operation Range: 15 meters
- Bluetooth Profiles: HFP, HSP, A2DP, A2DP
- CDC: CVC, SAC, AAC
- Battery Capacity: 400mAh/3.2V
- Charging Time: About 2 hours
- Working Time: About 60 hours (20% volume)
- Talking Time: About 40 hours (20% volume)
- Headset Net Weight: 100g
- Headset Size: 127*146*50mm
- Compatible devices: PC, Laptop, Smartphone
- Microphone Rotation Angle: 135°

How to use

A. Bluetooth Pairing and Connection

- Toggle the switch button to the ON side; the red and blue light flash alternately.

Pairing

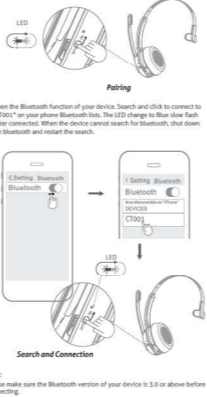

Search and Connection

Tip: Please make sure the Bluetooth version of your device is 3.0 or above before connecting.

B. How to pair with a computer

*** Pair with a computer via USB Dongle**

- Plug the USB Dongle into the USB port of your computer and wait for your computer to recognize the LED indicator on the USB Dongle flashes blue.
- Toggle the switch button to the ON side, and it will automatically enter pairing mode, with prompt sound "Power On".
- Make it discoverable by the computer. Check that the Indicator Button Blue and red alternately. You will hear the voice guidance "Pairing".
- On your PC, select Start > Settings > Bluetooth & other devices > Add Bluetooth or other device > Bluetooth > Click on the model number (C7001) of your device > A window will pop up indicating the Bluetooth connection is complete. When the voice cannot search for Bluetooth, shut down the Bluetooth and restart the headset of the other device.
- Pairing is successful when you hear "Your headset is connected" and the LED indicator or the USB Dongle is solid blue. This pairing process can take up to 10 seconds.


*** Pair with a computer via Bluetooth**

- On your device, toggle the switch button to the ON side, and it will automatically enter pairing mode, with prompt sound "Power On".
- Make it discoverable by the computer. Check that the Indicator Button Blue and red alternately. You will hear the voice guidance "Pairing".
- On your PC, select Start > Settings > Bluetooth & other devices > Add Bluetooth or other device > Bluetooth > Click on the model number (C7001) of your device > A window will pop up indicating the Bluetooth connection is complete. When the voice cannot search for Bluetooth, shut down the Bluetooth and restart the headset of the other device.
- Pairing is successful when you hear "Your headset is connected" and the LED indicator or the USB Dongle is solid blue. This pairing process can take up to 10 seconds.

C. Switch between USB Dongle and Bluetooth

- In the Bluetooth connection state, if you want to switch to USB Dongle connection, you need to turn off the Bluetooth function of your headset. The headset will automatically connect to the USB Dongle when you connect with USB Dongle. If you want to switch to Bluetooth connection, you need to unplug the USB Dongle first, and click (C7001) to connect to the headset under the Bluetooth pairing device list. Detailed steps refer to Page 1: A. Bluetooth Pairing and Connection.

D. Zoom & Other Meeting Apps Settings

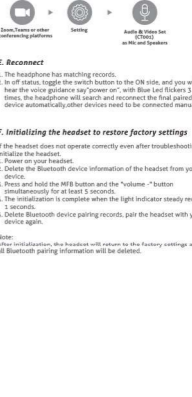

E. Reconnect

- The headset has matching records.
- In off state, toggle the switch button to the ON side, and you will hear the voice guidance "Power On". With Blue led flash, 3 seconds, the headset will search and reconnect the first paired device. Alternatively, other devices need to be connected manually.

F. Initializing the headset to restore factory settings

If the headset does not operate correctly even after troubleshooting, initialize the headset.

- Power on your headset.
- Disable the Bluetooth device information of the headset from your device.
- Press and hold the MFB button and the "Volume +" button simultaneously for at least 8 seconds.
- The initialization is complete when the light indicator starts red flash.

Note: After initialization, the headset will return to the factory settings, and all Bluetooth pairing information will be deleted.

Operations Instructions

Button	Function	Operation Instructions
ON/OFF Power Button	Power on	1. In off state, toggle switch to the ON side and it will automatically enter pairing mode, with prompt sound "Power On". 2. In the state of state, toggle switch to OFF side, and it will automatically enter pairing mode, with prompt sound "Power On".
	Power off	1. In on state, toggle the switch to the OFF side, and it will automatically enter pairing mode, with prompt sound "Power On". 2. Connect to the power on status, automatically shut down after 10 minutes.
	Enter Pairing Mode	1. Power on the headset, it will enter pairing mode automatically. 2. If the headset and Bluetooth devices connected, need to connect new Bluetooth devices, you need turn off the Bluetooth of the original device, headset will enter pairing mode. 3. When the headset is connected to the USB Dongle, unplug the USB Dongle, the headset will automatically enter pairing mode.
	Play / Pause	Single click the MFB to play/pause music.
	End call	Double click the MFB to end the last call.
	Voice calling	Press and hold the MFB for 1 second, then release.
	Answer a call	Single click the MFB to answer an incoming call.
	Hang up a call	Single click the MFB to hang up a call.
	Reject a call	Press and hold the MFB for 1 second to reject an incoming call.
	Audio switching	Press and hold the MFB for 3 seconds during a call to switch between the mobile phone and the headset.
	A third party call	Single click the MFB to answer a new call and hang up the current call. Double click the MFB to answer the new call and keep the current call.

Button Function

Button	Function	Operation Instructions
A. Multi-function MFB	During a voice call, double click to switch between the current call and the incoming call.	
	Press and hold the MFB for 1 second to keep the current call and reject the new call.	
B. Adjusting voice volume	When the headset is connected to your phone, press and hold the MFB for 1-2 seconds to activate your voice assistant.	
	Press and hold the MFB and Volume+ for 5 seconds to clear the pairing record in the headset. If the pairing record is cleared, the headset will not be automatically reconnected. You need to delete Bluetooth device pairing records, then pair and connect again.	
C. Clearing the pairing record	Press and hold the multi-function button for 10s to reset and restart.	
D. Reverting	Press and hold the multi-function button for 10s to reset and restart.	
E. Volume +	Single click Volume +	
	Next Song	
	Press and hold Volume + for 1 second, Volume Down	
	Single click Volume -	
	Previous Song	
	Press and hold Volume - for 1 second, Volume Up	
	Single click Volume +	
F. Mute button	Mute the microphone	
	Toggle on the mute button to mute or resume the microphone.	

Charging Method 1

- Place the headset at one when the Red LED flashes.
- Connect the Type-C interface to the headset, and connect the USB Type-A to a host or a PC to charge, or power bank.
- The indicator lights is steady red when the headset is charging.
- Charging is completed in about 2 hours when the light is steady blue.



Charging Method 2

- Connect the charging base. Connect the USB to the PC with the USB-C cable. The LED indicator on the base lights up in blue.
- Charge the headset. Place the right headset on the charging base; the light on the base changes from blue to a clear flashing red light.
- The headset is fully charged. The clear flashing red light on the base goes out. The LED indicator on the base turns back to solid blue.
- Turn off the charging base. Unplug the USB-C charging cable and the blue light on the base goes off.

Tip: Please charge the headset once every two months if you won't use it for a long time.

This model supports charging while working, please connect the USB charging cable to charge first, and then turn on the C7001.

LED Indicator

Headset	LED Indicator
Power on	Blue LED flashes 2 times
Power off	Red LED flashes 2 times
Pairing mode	Red & Blue LED flash alternately
Connected standby mode	Blue LED flashes once every 10 seconds
Pairing	Blue LED flashes 2 times every 10 seconds
Clear the pairing record	Red LED flashes once 1 second
Charging	Steady Red LED
Full charged	Steady Blue LED
Low battery	Red LED flashes

Q: Under what circumstances will the headset automatically shut down?

A: If the device is connected for more than 30 minutes, or the battery power is too low or the voltage is lower than 3.1V, the headset will automatically power off.

Q: What should I do if the headset cannot be reconnected or the button fails?

A: It is recommended to reset the headset, the steps are as follows:
1. Disconnect from the device.
2. Delete the Bluetooth device information of the headset from the device.
3. Press and hold the MFB button and volume - button simultaneously for at least 5 seconds.
4. Indicator light (red) flashes once, the initialization is complete.
5. Pair the headset with your device again.

Q: What should I do if there is a problem with the connection or a call?

A: Press and hold the multi-function button for 10s to reset and restart.

Q: What should I do if the headset connection is unstable or disconnected?

A: 1. There are too many obstacles or the distance is too far. Under normal circumstances, the connection distance can reach 15m (Line of sight distance without obstacles), but if there are obstacles such as walls, it will affect the connection stability.
2. Turn on the headset. Bluetooth device interference with the normal signal of the headset by a lot of other Bluetooth devices when using them.
3. If the original use is normal, but suddenly becomes unstable, it may be caused by signal or network problems.
4. If the above conditions are excluded, please test your headset with a different device, such as your mobile phone or tablet. If you don't experience skipping or audio lag when using the other device, your headset may be faulty. In some special cases after repairing the device, please contact the after-sales service on the home page for warranty.

Q: What does noise cancellation mean?

A: The headset adopts environmental noise cancellation technology, which filters unwanted environmental background sounds by calculating the frequency band of environmental noise, and captures clear and warm human voices to ensure the quality of your calls.

Q: Can it be used while charging?

A: When the headset needs to be used for a long time, due to the limited battery life, it is suggested to be used when connected to a charging power source. Note: When the battery power is too low to support the headset, it is suggested to avoid this from happening.

Q: What should I do if the headset volume is not loud enough?

A: Please check the volume of the connected device and the volume of the headset at the same time. If the problem is still not resolved, please find customer service.

Q: What should I do if the headset cannot be reconnected or the button fails?

A: It is recommended to reset the headset, the steps are as follows:
1. Disconnect from the device.
2. Delete the Bluetooth device information of the headset from the device.
3. Press and hold the MFB button and volume - button simultaneously for at least 5 seconds.
4. Indicator light (red) flashes once, the initialization is complete.
5. Pair the headset with your device again.

Q: What should I do if there is a problem with the connection or a call?

A: Press and hold the multi-function button for 10s to reset and restart.

Q: What should I do if the headset connection is unstable or disconnected?

A: 1. There are too many obstacles or the distance is too far. Under normal circumstances, the connection distance can reach 15m (Line of sight distance without obstacles), but if there are obstacles such as walls, it will affect the connection stability.
2. Turn on the headset. Bluetooth device interference with the normal signal of the headset by a lot of other Bluetooth devices when using them.
3. If the original use is normal, but suddenly becomes unstable, it may be caused by signal or network problems.
4. If the above conditions are excluded, please test your headset with a different device, such as your mobile phone or tablet. If you don't experience skipping or audio lag when using the other device, your headset may be faulty. In some special cases after repairing the device, please contact the after-sales service on the home page for warranty.

Q: Can it be used while charging?

A: When the headset needs to be used for a long time, due to the limited battery life, it is suggested to be used when connected to a charging power source. Note: When the battery power is too low to support the headset, it is suggested to avoid this from happening.

Q: What should I do if the headset volume is not loud enough?

A: Please check the volume of the connected device and the volume of the headset at the same time. If the problem is still not resolved, please find customer service.

Q: Can the MFB answer / call function be used on a computer?

A: The MFB function operation is only applicable to mobile phones. If you use the headset to answer / call on a PC, it cannot be directly operated on the computer office software, because the software is not certified, so it is not compatible. (Most headphones have this difficulty).

Q: What should I do if the microphone does not work?

A: Please adjust the sound settings of the computer and software before use, and ensure that the headset model is selected or the microphone input device and the speaker output. Also, replace the connected device to test if the microphone is working.

Q: How to check the remaining power of the headset?

A: When using a Bluetooth connection, the remaining battery power will be displayed numerically or graphically on the device you are using. (The remaining power cannot be checked when connected to a dongle). When the headset needs to be charged, it will prompt "Low battery please charge".

Q: Can the mute state of the headset be maintained all the time?

A: No. If the call is muted, the headset state will be controlled automatically after the call is over. If you need to keep the call muted, you need to press the mute button during each call.

Q: Can Mute be used as all software?

A: The mute function may not support synchronized mute when used on third-party software, you can turn off/mute only on software or only on headset.

Q: Is it possible to convert voice to text through microphone?

A: Yes, after you have ensured that the device is successfully connected to the headset, allow the microphone to connect for speech to text.

Precautions

Note on static electricity: Static electricity accumulated in the body may cause static tingling in your ears. To minimize the effect, wear clothes made from natural materials.

Others:

- Do not place this headset in a place exposed to humidity, dust, soot or steam, or subject to direct sunlight. Do not leave the headset in a car for a long time, it may cause a malfunction.
- Listening with this headset at high volume may affect your hearing for traffic safety, do not use this headset while driving or cycling.
- Do not use the headset in places where it would be dangerous if you are unable to hear an ambient sound, such as railroad crossings, train station platforms, pedestrian crossings, and construction sites.
- Do not put weight or pressure on the headset as this may cause the headset to deform during long usage.

Disclaimer

Every effort has been made to ensure that the information and procedures in this guide are accurate and complete, no liability can be accepted for any errors or omissions and we reserve the right to make any changes without further notice to any products mentioned herein.

Bluetooth

The Bluetooth word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by SKY WINC Communication Electronics Co., Ltd is under license. Other trademarks and trade names are those of their respective owners.

FCC Statement

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference to a residential installation. This equipment generates and can receive radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into a different outlet than that which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

Caution!

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been developed to meet general RF exposure compliance. The device can be used without RF exposure restriction.

成品尺寸: 173 x 158mm
材质: 128g 双铜 单黑印刷 双面印刷
过油 折叠 (手风琴式)

封底



© levn@outlook.com
© SKY WINC Communication Electronics Co., Ltd
© Guangdong QINXING Technology Development Co., Ltd
© Guangdong QINXING Technology Development Co., Ltd