

ROADKING[®]




**RKING1000
Noise-Canceling Mono
Bluetooth[®] Headset
User Manual**

Contents:

Product Overview ----- 3
Basic Operation ----- 4
Bluetooth Pairing and Connection ----- 5
Connection with Two Devices ----- 6
LED Indicator ----- 7
Charging ----- 8
Product Specifications ----- 9
Notes and Q & A ----- 10

Product Overview

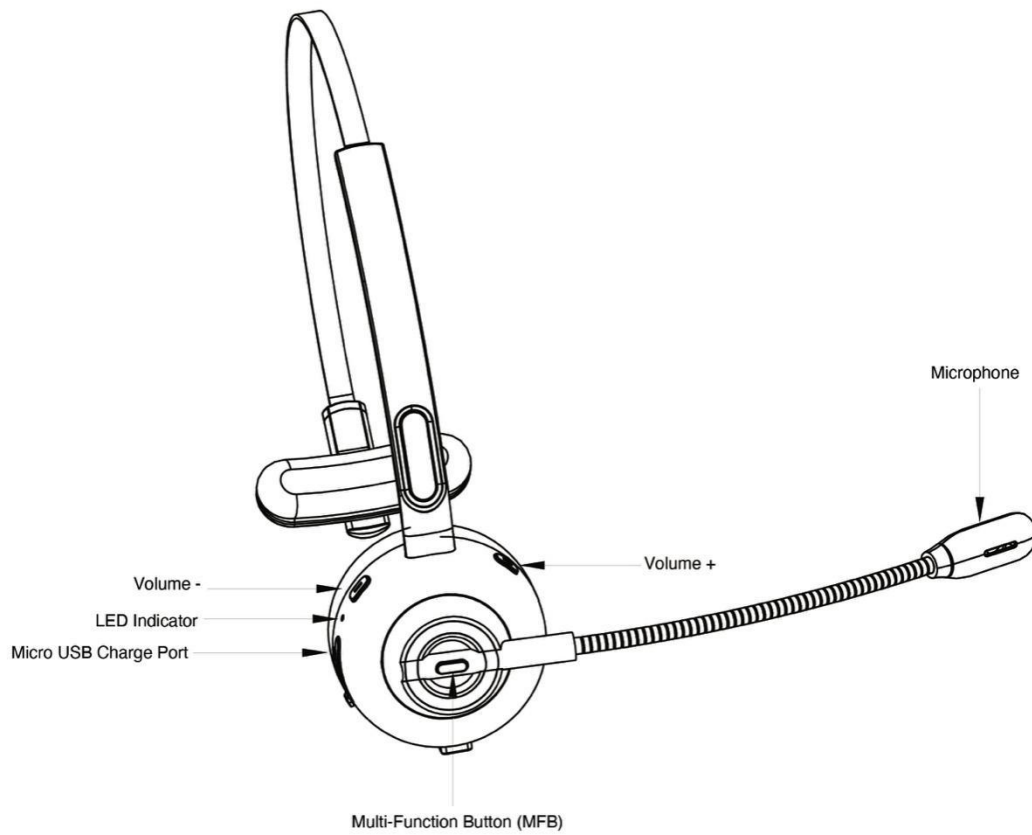

Package Contents:



- A. Bluetooth headset RKING1000 x 1
- B. Micro USB charging cable x 1
- C. User manual x 1
- D. Car charger x 1
- E. Sponge microphone cover x 1
- F. Drawstring bag x 1

Basic Operation

| Button | Function | Operation Instructions |
|----------|--------------------|--|
| MFB | Power on | When device is off, press and hold the MFB for 1-3 seconds to power on. |
| | Power off | When device is on, press and hold the MFB for 5 seconds to power off. |
| | Enter pairing mode | When device is off, press and hold the MFB for 5-8 seconds to enter into pairing mode. When under disconnected standby mode, double-click the MFB to enter into pairing mode. |
| | Play / Pause | Short click the MFB when listening to music. |
| | Redial a call | Double-click the MFB to dial the last number called. |
| | Reconnect | If you have paired before, powering on should enter into reconnected state. If it doesn't reconnect automatically, short click the MFB to reconnect under pairing mode. |
| | Voice dial | Hold down the MFB for 1 second, then release. |
| | Audio switch | Hold down the MFB for 1 second to switch the audio between phone and the Bluetooth headset. |
| | Answer a call | When receiving a call, short click the MFB to answer. |
| | End a call | To end a call, short click the MFB. |
| | Reject a call | To decline an incoming call, hold down the MFB for 1 second. |
| Volume + | Volume up | Short click the Volume + button to increase volume. |
| | Next song | Hold down the Volume + button to skip to the next song. |
| Volume - | Volume down | Short click the Volume - button to decrease volume. |
| | Previous song | Hold down the Volume - button to go back to the previous song. |


Bluetooth Pairing and Connection

- A. When device is off, press and hold the Multi-Function Button (MFB) for 5-8 seconds to enter into pairing mode. The blue & red lights should alternate flashing.
- B. Search and click "RK1000" to connect the headset to your phone's Bluetooth. Once connected, the blue LED light will flash and you can now play music from your phone to the headset.
- C. You can press the MFB and Volume +/- on the Bluetooth headset to control calls and music.

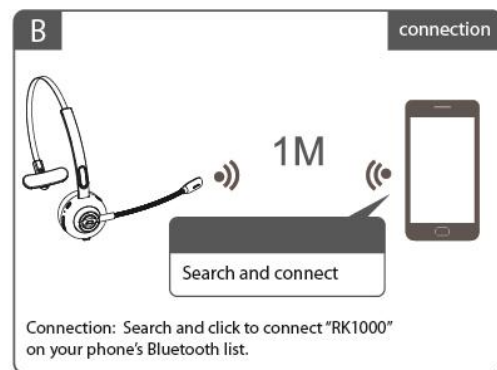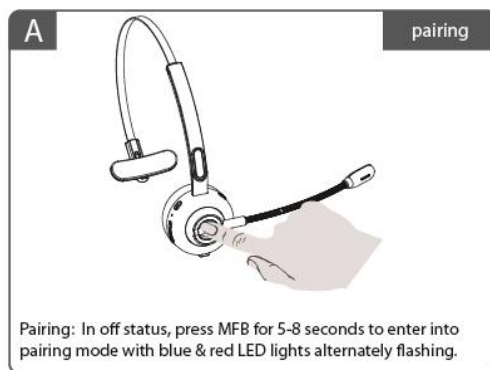

Connection with Two Devices

- A. Follow instructions on page 4 to connect first phone, then turn off the Bluetooth function on the first phone.
- B. You'll see the red & blue LED lights flash alternately.
- C. Search and click "RK1000" on the second phone's Bluetooth list. The LED will flash blue once connected.
- D. Turn the first phone's Bluetooth back on and reconnect to "RK1000". The headset will now be connected to two phones.

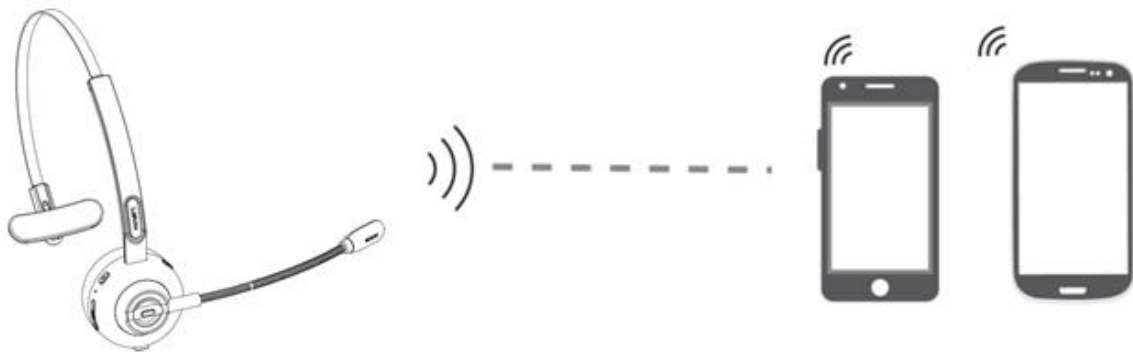

Note:

Music can only be played from one phone at a time. When you want to play music from the other phone, you will need to pause or close the music of the previous phone. The same applies during talking status.

LED Indicator


| Mode | LED Indicator |
|--------------------------|---|
| Power on | The blue LED light flashes for 1 second |
| Power off | The red LED light flashes for 1 second |
| Pairing mode | The red & blue LED lights flash alternately |
| Reconnected standby mode | The blue LED light flashes once every 2 seconds |
| Connected standby mode | The blue LED light flashes once every 5 seconds |
| Playing music | The blue LED light flashes once every 5 seconds |
| Talking | The blue LED light flashes once every 5 seconds |
| Delete paired record | The red & blue LED lights flash once at the same time |
| Charging | Solid red LED light |
| Full charge | Solid blue LED light |
| Low battery | The red LED light flashes |

Charging

Please charge the RKING1000 at once when the red LED flashes. Charging time is approximately two hours. Solid LED red will change to solid LED blue when fully charged.

Charge Connections

Please connect to the RKING1000 charging port through the Micro USB charging cable. The charger can be used as a car charger, travel charger, computer USB, etc.

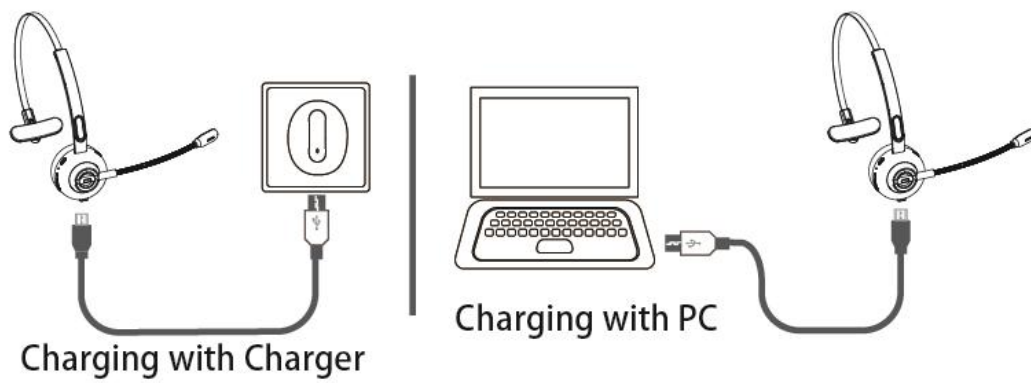

Note:

1. Charge the RKING1000 at least once every two months when not in use.

Product Specifications

| | |
|---------------------|-----------------------------|
| Bluetooth Version | Bluetooth V5.2 |
| Bluetooth Chipset | BT8926B2 |
| Operation Range | Up to 32 feet |
| Bluetooth Protocols | HSP HFP A2DP AVRCP |
| CODEC Code | SBC |
| Battery Capacity | 180maH/3.7V |
| Charging Time | 2 hours |
| Stand by Time | 200 hours |
| Working Time | About 14 hours @ 50% volume |
| Headset Net Weight | .11 lbs |
| Headset Dimension | 6.42 " x 5.60" x 1.9" |

Actual use time will differ depending on environment and music.

Notes and Q & A

A. How to reconnect and operate when connection fails?

When RKING1000 connects to your phone successfully the first time, it will search and reconnect to the paired device automatically going forward. If it fails to connect, repair the phone to reconnect.

B. How to delete paired records?

When powered on, press and hold the Volume + and - buttons for 5 seconds to clear the pairing record. The blue and red indicator lights will flash once at the same time indicating the record has been cleared. Try clearing the records when experiencing a connection problem.

C. What is the password for pairing?

Some devices require a password for pairing. Please try 0000, 8888, 1111, or 1234.

D. What device can charge the headset?

Any car charger, power bank, PC etc. that has a DC 5V, charging current more than 500mA will charge the headset.

E. Three-way calling function operation?

When receiving an incoming call, while already on a call...

1. Short click the MFB to answer the new call and end the current call.
2. Double-click the MFB to answer the new call and keep the current call on hold.
3. Click and hold the MFB for 1 second to reject the incoming call. When on a three-way call, double-click the MFB to switch audio between the current call and call on hold.



FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC Statement

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

ONE-YEAR LIMITED WARRANTY For support, product and warranty information, please visit www.roadprobrands.com

RoadKing® and RoadPro® are registered trademarks owned by DAS Brands, LLC and its affiliated companies. The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by DAS Companies, Inc. is under license. All other trademarks, registered trademarks, copyrights and logos are the property of their respective owners. ©2022 DAS Companies, Inc. and/or affiliates.