

Unified national service hotline: 400-881-0138



Bluetooth Headset
Trand name:DACOM
FCC ID:WTDC001

SAFE JOURNEY THROUGHOUT YOUR LIFE

<http://www.china-dacom.com>

Previous

Dear Customer

Thank you for choosing Dacom - XL Bluetooth Headset. Please read the user manual carefully for proper instruction to maximize the advantage of our product. Our Bluetooth headset are well designed fashionably, smart and portable, pure acoustic and multi functional. We have patents for the whole series of our Bluetooth headsets. Our Bluetooth headsets are applied with the top advanced electro acoustic technology, providing you the best enjoyment of music any time at home, outdoor or business work, and provide the perfect acoustic with your notebook and any digital audiovisual devices. Lead you to wonderful music, enjoy healthy & happy life.

Precautions


- Please keep or use this product at normal temperature;
- Do not expose this product in rain or moisture;
- Do not throw this product in case any damage thus made;
- Do not disassemble, repair or reform this product;
- Do not clean this product with any chemical solvents;
- Please use USB power of DC5V for output when needed;
- Do not throw away or put it in fire to avoid any danger.

Product Description

Item:	Bluetooth headset
Bluetooth standard:	V4.0
Charging port:	Micro USB
Battery:	High-capability 38 mAh rechargeable lithium polymer battery
Operating range:	10m
Profiles Supported:	Headset/handsfree/A2DP/AVRCP
Talking/Playing time:	up to 4 hours
Stand by time:	100 days
Charging time:	2 hours
Special function:	NFC/Displaying the headset's battery on the iOS devices
Voice prompts:	power on/headset is connected/battery low power off

The headset comes with Echo cancellation and noise reduction function, it can be applied to audio from any Bluetooth devices like Bluetooth mobile phones, Bluetooth notebooks.

Product schematic

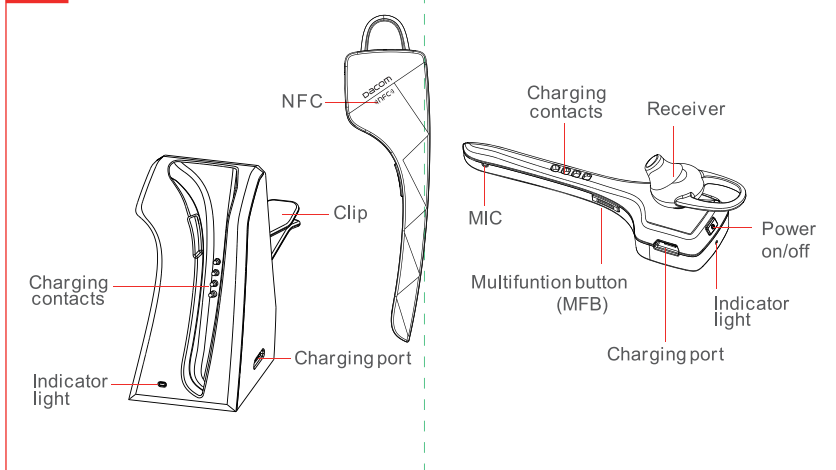

Features

- Power on - Headset is not on charging dock and power off: Press the power on/off button for one time until the blue indicator flashes on 1 second and the voice prompt, "power on", the headset is power on
- Headset is on charging dock: Pick up headset from the charging dock, blue indicator flashes 1 second, Headset is power on
- Power off - Headset is not on charging dock and power on: Press the power on/off for one time until the red indicator flashes on 1 second and the voice prompt "power off" here the headset is power off.
- Headset is on charging dock put the headset back after the call the headset turns to standby status, headset will be power off automatically when the signal between mobile phone and headset is disconnected after 5 minutes
- ☎ Pull up to answer a call - when calls coming pull up the headset will turn to talking mode
- ☎ Answering a call - When connecting 1 device
- Headset is not on charging dock Press MFB button to answer the phone call
- Headset is on charging dock. Pull up the Bluetooth headset from charging dock, if headset on power off status, it will connect with mobile phone automatically within 5 seconds and answer the phone call, if it's on standby status, it will answer the phone call directly

Features

- Ending a call - During phone talking, press MFB button to end the call or put the headset back to charging dock to end the call
- Rejecting call - When calls coming, press and hold MFB button for 2 seconds to reject a phone call
- Redialing the last called number - When connecting only 1 device: Press MFB button twice to redialing the last called number - When connecting 2 devices: Press MFB button twice to redialing the last called number When connecting two devices, this function only available for the device connected firstly - Remark: Different mobile phones have different operation way
- Play/Pause - Short press the MFB button to play music, press again to pause
- Mute Function - When in talking mode, press and hold the MFB button for 3 seconds to active
- NFC function - The headset in pairing mode could be connected to the mobile phone with nfc function
- Never out of power - When a car charger is connected with the charging dock, which will always be charged, the headset will never run out of battery.

Features

- Pair Bluetooth headset with mobile phone
 - Bluetooth headset and phone need to be paired for the first time
 - Make sure the headset is power off (refers to power off parts), and turn on the Bluetooth function of the phone.
 - Press and hold power on/off button for 5 seconds until the Indicator red light and blue light flashes alternately, then the headset is into pairing status
 - Mobile phone will automatically search for nearby Bluetooth devices and find "Dacom-XL", select "Dacom-XL" and confirm the connection, while hearing the voice prompt "Your headset is connected", then the headset and the phone has successfully connected.
 - If the mobile phone version is below 2.1, it needs enter the password "0000."

Tip: If pairing is not completed within 90 seconds, it shows that pairing fails, then repeat the above four steps to re-pair.
- A headset connect 2 mobile phones at the same time
 - Follow above pairing steps, pair headset with the first phone
 - Headset and the first phone paired successful, power off Bluetooth headset
 - Follow above pairing steps again, pair headset with the second phone
 - Headset and the second phone paired successfully, active on the first phone and connect headset, then the headset and 2 phones paired successfully.

Features

- Your headset uses a rechargeable battery, you must charge the battery fully before using the headset for the first time.
 - Charging the headset only: Connect headset and computer or car charger by USB cable. Red light remains solid when charging. Blue light remains solid when charging completed.
 - Charging the headset by dock: Put headset on the dock, connect the dock and computer or car charger by USB cable. During charging, the indicator of the dock is on red, headset is on red. When battery fully charged, the dock is still on red, headset is on blue.
 - Charging the headset by the dock separately: Put the headset on the dock, the headset is in charging mode. The indicator is on red when charging. It turns blue when charging completed. When there is no indication after putting the headset on the dock, please charge the dock. It is on red when the dock is being charged, and the red light goes out when charging completed.

When Connecting 2 devices
- When first connected mobile phone is on phone talking and second mobile phone has phone call coming in, press MFB button to answer second phone calling and keep the first phone calling
- Press MFB button twice to switch two phone calling

Handling of the Waste Electrical

The waste Electrical

This marking shown on the product or its literature indicates that it should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household user should contact either the retailer where they purchased this product or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.



Services Hot Line: 400-881-0138

Services time: AM 9:00 - PM 6:00
Monday to Saturday (holiday is exclusive)

Service Regulations and Explanation

After service

(A) Service system

1. Consultancies: Please read this user manual carefully before using this product. For any problem during using it, you can either contact the local retailer or call our customer service Hot Line: **400-881-0138**
2. Exchange service: within exchange time limit, for any indeliberate error during proper use, making sure the product as well as its accessories and package are all not damaged (if the appearance is damaged, it can only be repaired) you can either have it exchanged for a new one or repaired after the error is tested and examined;
3. Warranty service: within the warranty time limit, for any indeliberate error that occurs during proper use, warranty service is free for no charge (the speaker has warranty service for free within one year; for any deliberate damage, the warranty service should be paid).
4. Charged warranty service: within three years counting from one year after the date the product was purchased, any error repair will be charged; and user should pay the repair components, freight and labor cost.

5. Any of the below situation is not in the warranty service, but we provide charged service:

- ① The warranty date is expired;
- ② The warranty card is altered, or the series number differs from that of the product;
- ③ Accidental or deliberate damage is done to the product (for example: improper use against the user manual, improper set up which causes error, plugging in unmatched power, exposed to water, fallen etc.)
- ④ cannot provide valid warranty card or invoice (other but can prove that it is within the service limit);
- ⑤ Any error damage caused by force majeure such as earthquake, fire, flood, lightning strike etc.
- ⑥ Deliberate assembling, repair or reform without permission from our company.

(B) Explanation of After Service:

1. The date of purchased should be in accordance with that of the invoice, any failure to provide the valid proof, is subjected to the production date.
2. Quality problem does not include user's personal preference to tone and timbre.
3. The shell and user manual package are exclusive to warranty service.
4. For the model that production has been stopped, we only provide functional repair.
5. We are not responsible for any promises by retailer other than our company.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.