




FCC ID: WTDS015
Bluetooth headset User manual **EH**

Product Description

Item : U31
 Bluetooth standard : V 4.1
 Battery: 55mAh
 Battery Type: Rechargeable lithium polymer battery
 Rated Voltage: 3.7V
 External Voltage: DC4.8-5.5V
 Support protocol : Headset / Handsfree / A2DP /AVRCP
 Playing time : Up to 4 hours
 Standby time : Up to 100 hours
 Accessories : Micro USB charging cable, User manual

- This product can accept audio file from any Bluetooth devices like Bluetooth mobile phones, Bluetooth notebooks.
- When connect to Bluetooth DONGLE on PC, it can play any audio files on the computer.

Product Schematic

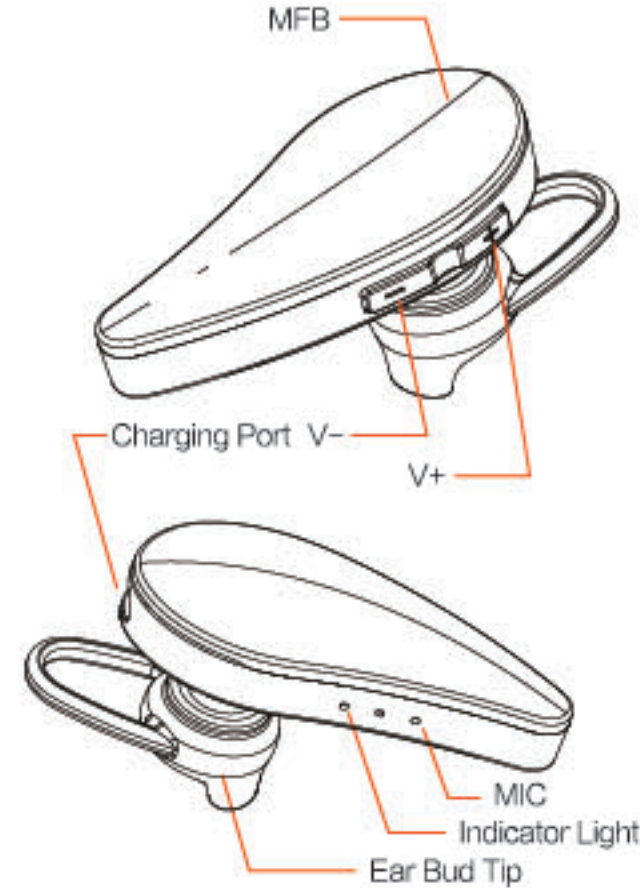

Features

- Power on**-Press and hold the "MFB" for about 1 second until the green indicator light flashes. It will find devices paired before automatically.
Power off-With the headset power on, long press the "MFB" for about 3 seconds, the indicator light goes off.
- Charging indicator** - Your headset uses a rechargeable battery, you must charge the battery fully before using the headset for the first time.
 - Plug the charging cable in the USB charging port.
 - The red indicator light remains solid when charging.
 - The fully charging takes about 2 hours.
 - The red indicator light goes out and the green indicator light remains solid when charging completed.
- Answering a call**-Short press the "MFB" on your headset.
- Ending a call**-Press the end key on your phone/short press the "MFB" on your headset.

Features

- Rejecting a call**- Press the "V-" button for 1 second on your headset.
- Redialing the last called number**- Double press the "MFB" when headset is in standby mode.
- Voice dialing**- On the status of standby, long press the "MFB" for about 1 second (Your phone must support this function)
- Previous/Next Track Selection**- When listening to the music, long press "V -" for about 1 second to next track; long press "V+ " for about 1 second to previous track.
- Volume control**- Short press the "V+ " to increase volume, short press the "V -" to decrease volume.
- Muting**- Long press the "V-" for about 1 second
- Call Switching**- Long press the "V+" for about 1 second

Features

- Incoming Number Report**- The headset will report the incoming number when call comes in.
- Pairing steps - pairing at the first time**
 - Keep the Bluetooth headset and your phone within 1 meter when pairing.
 - With the headset power off, long press the "MFB" for about 3 seconds until the headset is in pairing mode, red light and green light flash alternately
 - Set the phone to search for Bluetooth device.
 - When the list of detected devices appears, select "UCOMX".
 - Enter pin code "0000" if needed
 - Repeat above steps if the pairing failed
 - Green light flashes when pairing is done.
- Tips:** The headset will be power off if fails to search any Bluetooth devices in 5 minutes.
- There will be the automatic voice prompt "power on" when power on the headset**
Language switching(default in Chinese)
 -On the status of standby, long press the "V-" for about 4 seconds to change the language.

Features

- Twin-Link connection**
 - Follow the instruction to pair with the first mobile phone, and disable phone Bluetooth function, then pair with the second mobile phone.
 - Power off Bluetooth headset, active the Bluetooth function of the first mobile phone, then power on the headset, it will connect with two mobile phones automatically.
 - During a call, short press the "MFB" to end current call and answer waiting call.
 - Double press the "MFB" to answer the second call and switching between two calls
 - Short press the "MFB" to end the call one by one.

When two phones simultaneously connected to a Bluetooth headset, some functions will be restricted.

WARRANTY CARD						
Item	Dealer name	Product series number	Telephone number	Date of sales	User address	Contact address
Dealer information			User information		Remark	
The Headphone has one year free warranty service from the date of purchase, for any deliberate damage should charge warranty fee						

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.