


Bluetooth Stereo Headset

User Manual

(Quikcell)

FCC ID: X6HQUIKCELL

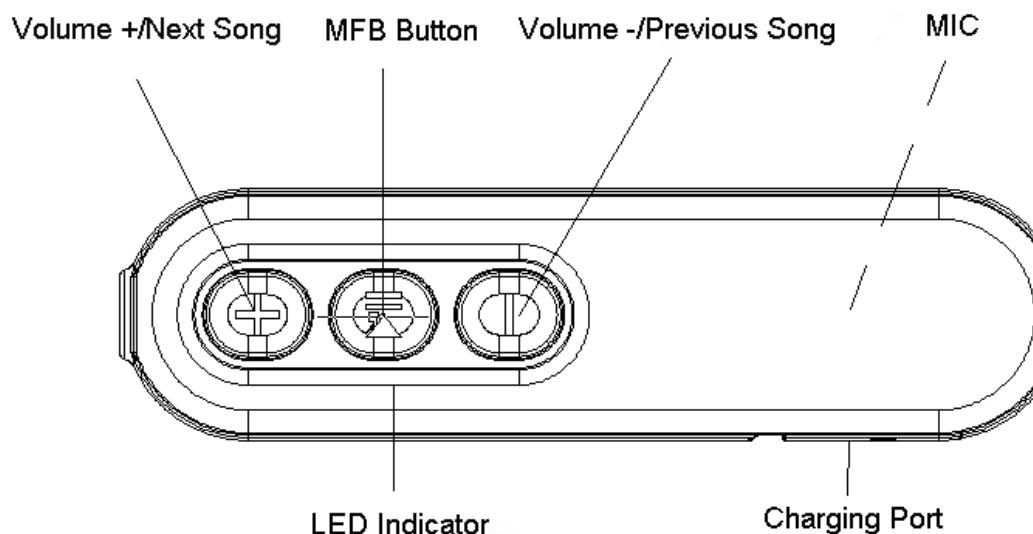

Basic Specifications

Size: 580(R*125+L*406.2*Frame 48.8)*12.35*8.35 mm

Weight: 9.7g (Net Weight)

Charging Port: Micro USB

Keys: 3 (MFB button, volume+/backward button, volume- /forward button,)

Battery: Rechargeable lithium polymer battery 3.7V;

Charging Specifications: DC 5V/60mA

Charger Output: 5V/0.5~1.0A

Charge Indicator: Red LED light (Charging) / Blue LED light (Charging completed)

Standby Time: 100 hours

Talk Time: 4.5 hours and upwards

Music Time: 4 hours and upwards

Charging Time: 1.5 hours

Volume Control / Variable for per stage : Stage 16 / 1.5dB variable for per stage.

Indicator for Charge in working stage: Battery voltage lower than 3.3V (the stage of battery lower than 15%) , there will be a warning tone with LED indicator flashing in red; battery voltage lower than 3.1V (the stage of battery lower than 5%), the headset will power off directly.

Operating Temperature: Charging 0 ~ 40°C, charging than -20 ~ 60°C.

■Storage Temperature: -40 ~ 80°C.

Speaker and MIC parameters

Speaker Specifications / mode: Φ 9.0mm, Dynamic

Distortion: Below 1%

Impedance:32 Ω /typ

Frequency(Hz): 20Hz~20KHz

MIC Sensitivity: -42±3dB

Bluetooth Parameters

Bluetooth Version: 4.0

Support Profile: HSP, HFP, A2DP, AVRCP

The Remote Control to Speaker: MFB (Power ON / Power Off / Play / Pause) ; Vol+/Next song, Vol-/Previous song.

Device Name: Quikcell

Pass: 0000

RF Transmitter: class II

Receive Sensitivity: -90dBm

Transmission Range (Hz): 2.402GHz ~ 2.480GHz

Transmission Distance: 10m

Operating Instructions(The Switching between Spanish and English)

The Switching between Two Kinds of Language: Double click the MFB button when the headset is power on and make sure it disconnects with any device. At this time you will hear the warning tone.

Power On

When the headset is off, press and hold the multi-function Button (MFB) for 3 seconds. The LED indicator will flash twice in blue. At this time you will hear the words "Power

ON/” from the headset. The headset will be paired with the last connected Bluetooth device or mobile phone automatically when turned on.

Power Off

When the headset is on, press and hold the MFB for 3 seconds. The LED indicator will flash once slowly in red. At this time, you will hear the words “Power Off/” from the headset. The headset will disconnect from your phone devices when turned off.

Pairing Mode

When the headset is off, press and hold MFB for 6 seconds until the LED indicator flashes red and blue in alternating colors. At this time, you will hear the words “Pairing/” from the headset.

※ If you release the MFB before the headset goes into pairing mode, it will power on. If you want to enter into pairing mode again, please power off the headset or press the Vol+ and Vol- button concurrently.

Easy connection function

If the headset doesn't connect with any phones when it is on, you can enter into speed pairing mode by pressing the Vol+ and Vol- button concurrently and connect with your phone.

Answering calls

If a call comes in when listening to music or headset is standing by, press the MFB shortly to answer the incoming call. If the music is playing, it will pause automatically during the call, the music will start playing automatically.

Reject Calls

If a call comes in, press and hold the MFB button for 2 seconds to reject the incoming call.

End Calls

Press the MFB shortly to terminate when you finished your call.

Volume

To adjust the volume when talking on the phone, press the Vol+ and Vol- to make volume do up and down. When you reach the max/min volume, you will hear a warning tone.

Last Number Redial

When listening to music or headset is standing by, double click MFB to redial the last number. If you are listening to music, it will pause automatically during the call.

Mute

When talking on the phone, press and hold Vol+ or Vol- for 2 seconds to mute your phone. You will hear the caller, but the caller will not hear you. There will be a warning tone every 10 seconds, reminding you that you are in mute mode.

Quit Mute

Press and hold Vol+ or Vol- for 2 seconds to exit mute mode.

Switching Between Your Mobile Phone and Headset

When talking on the phone, double-click the MFB to switch the voice from your headset to your mobile phone. By double-click the MFB again, the voice will switch back to the headset.

Reconnect

When the headset is disconnected from your mobile phone, you will hear the words “Your headset is disconnected”. If you press the MFB, it will reconnect. You will hear the words “Your headset is connected” from the headset.

※ Some mobile phone may have a prompt screen, that will ask you if you would like to pair your device.

Voice-Command Dial

If your mobile phone supports this function, press and hold Vol+ or Vol- for 2 seconds to activate voice command. By re-pressing and re-holding vol+ or vol- for 2 seconds during the voice dial mode, voice dial will be canceled.

※ Please refer to the manual of your mobile phone for voice-command dial support.

Connect with 2 mobile phones

- A. First disconnect the Bluetooth device from your phone if it is already connected.
- B. Press vol+ and vol- concurrently to put the headset in pairing mode.
- C. Turn on and search Bluetooth device on your second phone until you find "SH19" and select to begin pairing.
- D. Please reconnect with your first mobile phone device.
- E. Now you should have two mobile phones connected with the headset.

Transfer Calls

When you are talking on the phone and receive another incoming call, press the MFB for 2 seconds to reject the incoming call. If you click Vol+ and Vol- concurrently (with the reminding tone), you will answer the incoming call. Your first call will be placed on hold. When you click Vol+ and Vol- concurrently again, you will transfer back to your first call. You should hear a beep. During this time your second call will be placed on hold. You can also end the call by clicking the MFB.

Music Play Operating

Music Play

Operate on the phone or Click MFB of the headset. (Music will play automatically on some mobile phones when it connect with Bluetooth device)

Pause and Restart Music

When listening to music, click MFB to pause music and click MFB again to restart music.

Volume

To adjust the volume when listen music, press the V+ or V- to adjust the volume up or down. When you reach the max/min volume, you will hear a warning tone.

Play Previous Song

Press volume- for 2 seconds to play previous song.

Play Next Song

Press volume+ for 2 seconds to play next song.

LED Indicator Status

Charging	Red LED Light
Charging Complete	Blue LED light
Power ON	Blue LED light flashes twice slowly
Power Off	Red LED light flashes once slowly
Pairing Mode	LED light flashes in red and blue alternately
Power On (Not Connected)	Blue LED light flashes once every 5 seconds
Power On (Connected)	Blue LED light flashes once every 3 seconds
Power On (Talking)	Blue LED light flashes once every 3 seconds
Power On (Dial Call)	Blue LED light flashes continuously
Power On (Incoming Call)	Blue LED light flashes continuously
Power On (Play Music)	Blue LED light flashes twice every 4 seconds
Battery Low	Red LED light flashes once every 20 seconds with reminding tone “battery low”

Notes:

It will turn off automatically after 5 minutes if without any connection with mobile phone when it turns on.

Pairing time: 3 minutes. It will quit the pairing mode automatically after 3 minutes if without any connection with mobile phone when it is in the state of pairing.

FCC Warning:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and**
- (2) this device must accept any interference received,**
including interference that may cause undesired operation.